

BookletChart™



Cape Resurrection to Two Arm Bay NOAA Chart 16682



*A reduced-scale NOAA nautical chart for small boaters
When possible, use the full-size NOAA chart for navigation.*



- Complete, reduced-scale nautical chart
- Print at home for free
- Convenient size
- Up-to-date with Notices to Mariners
- Compiled by NOAA's Office of Coast Survey, the nation's chartmaker

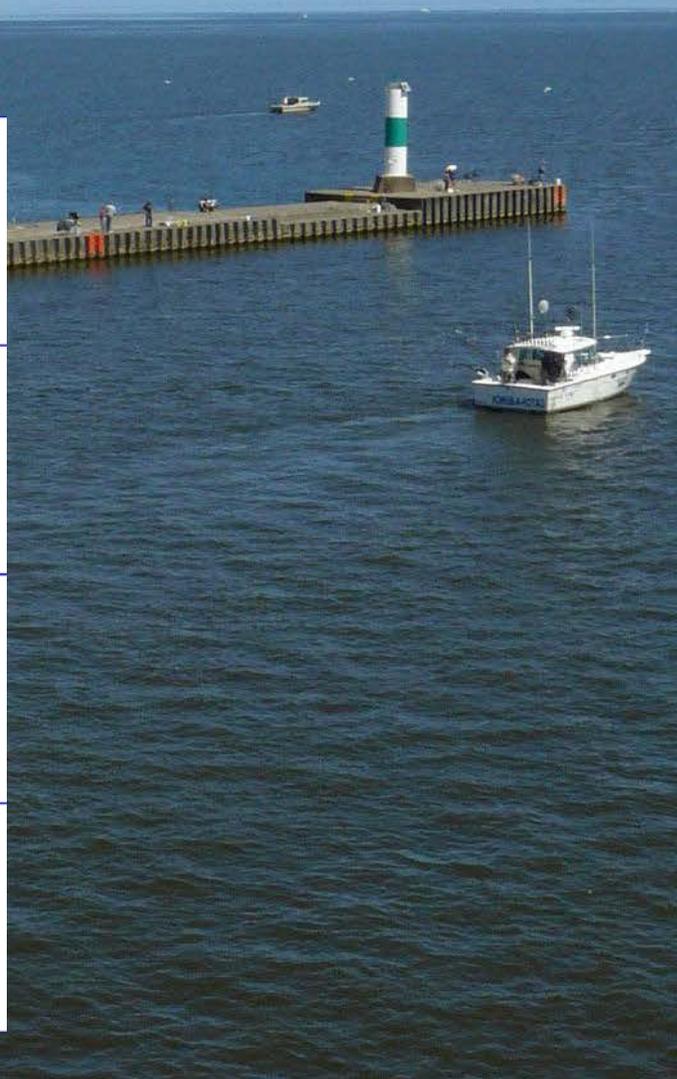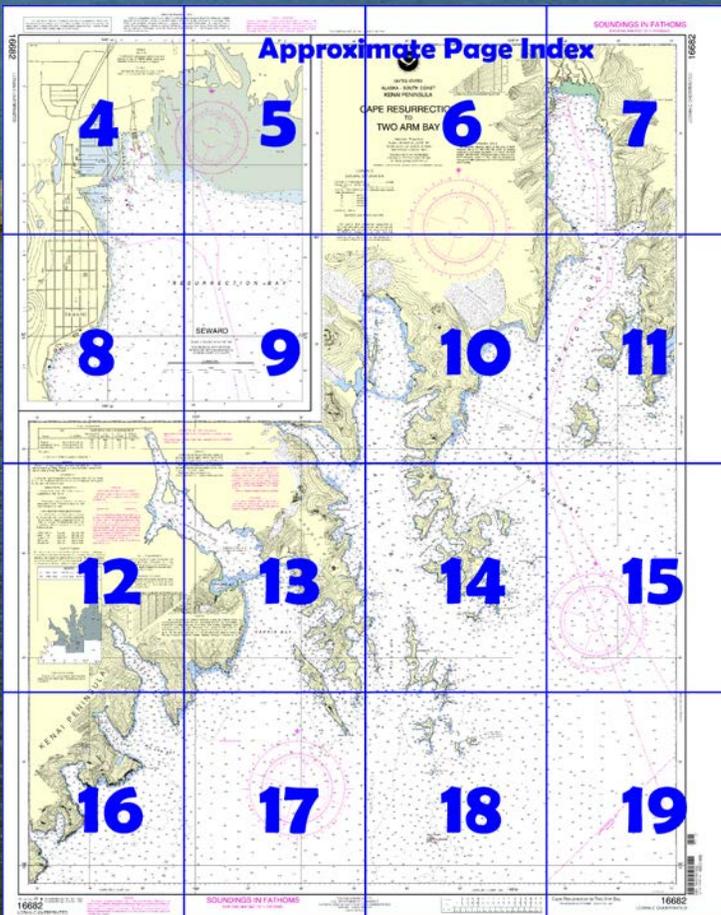

**Published by the
National Oceanic and Atmospheric Administration
National Ocean Service
Office of Coast Survey
www.NauticalCharts.NOAA.gov
888-990-NOAA**

What are Nautical Charts?

Nautical charts are a fundamental tool of marine navigation. They show water depths, obstructions, buoys, other aids to navigation, and much more. The information is shown in a way that promotes safe and efficient navigation. Chart carriage is mandatory on the commercial ships that carry America's commerce. They are also used on every Navy and Coast Guard ship, fishing and passenger vessels, and are widely carried by recreational boaters.

What is a BookletChart™?

This BookletChart is made to help recreational boaters locate themselves on the water. It has been reduced in scale for convenience, but otherwise contains all the information of the full-scale nautical chart. The bar scales have also been reduced, and are accurate when used to measure distances in this BookletChart. See the Note at the bottom of page 5 for the reduction in scale applied to this chart.

Whenever possible, use the official, full scale NOAA nautical chart for navigation. Nautical chart sales agents are listed on the Internet at <http://www.NauticalCharts.NOAA.gov>.

This BookletChart does NOT fulfill chart carriage requirements for regulated commercial vessels under Titles 33 and 44 of the Code of Federal Regulations.

Notice to Mariners Correction Status

This BookletChart has been updated for chart corrections published in the U.S. Coast Guard Local Notice to Mariners, the National Geospatial Intelligence Agency Weekly Notice to Mariners, and, where applicable, the Canadian Coast Guard Notice to Mariners. Additional chart corrections have been made by NOAA in advance of their publication in a Notice to Mariners. The last Notices to Mariners applied to this chart are listed in the Note at the bottom of page 7. Coast Pilot excerpts are not being corrected.

For latest Coast Pilot excerpt visit the Office of Coast Survey website at <http://www.nauticalcharts.noaa.gov/nsd/searchbychart.php?chart=16682>.



(Selected Excerpts from Coast Pilot)

Cape Resurrection, at the E entrance to Resurrection Bay, is a precipitous headland of solid rock, with little vegetation except some trees on the lower slopes. From the E two dome-shaped peaks, the N one the higher, show at the end of the cape, and a low saddleback of the peaks rises to higher mountains farther N. These are the only dome-shaped peaks in the vicinity, which assures easy recognition of the cape.

The passage between Barwell Island and

Cape Resurrection is deep and clear, midchannel depths ranging from 43 to 48 fathoms. This passage is reported to be dangerous for small craft

in E weather because of tide rips, confused seas, and seas bouncing back off the cliffs of Cape Resurrection.

Resurrection Bay extends about 16 miles inland N from Cape Resurrection. The depths are great throughout, and there are no dangers in the usual track of vessels. A flat extends 0.5 to 0.6 mile from the entire N shore at the head of the bay. The shores and islands are steep and high, with precipitous slopes in many places. The valleys are wooded up to about 1,000 feet. Anchorages, few and indifferent because of the great depths, are subject to strong williwaws.

Harding Gateway, the S entrance to Resurrection Bay, is between Cheval and Rugged Islands.

Seal Rocks, the southernmost land feature in the W approach to the bay, are a group of four small, rocky islets. The northernmost and largest is 278 feet high and has an arch through the middle. **Seal Rocks Light** (59°31'14"N., 149°37'47"W.), 285 feet (86.9 m) above the water, is shown from a skeleton tower with a diamond-shaped red and white daymark on the summit of the largest islet.

Marys Bay, a large cove indenting the S shore of **Rugged Island**, affords fair anchorage in E weather. Anchor in the E part with Pilot Rock about on range with the S entrance point. An Army pier, in poor repair, is on the S shore of the cove. **Rugged Island Light** (59°50'18"N., 149°22'26"W.), 438 feet (133.5 m) above the water, is shown from a square frame with a diamond-shaped red and white daymark on the SE end of the island.

Sunny Cove, the S bight on the W side of **Fox Island**, is the best anchorage in Resurrection Bay. No ocean swell makes into the cove, and it is sheltered from all but W winds. The williwaws are bad with E winds. The cove, wide and clear, has anchorage in the middle, 300 to 800 yards from its head, in 15 to 25 fathoms, muddy bottom.

Seward is on the W side of the N end of Resurrection Bay. Seward is 1,234 miles from Seattle via the outside route from Strait of Juan de Fuca, and 1,398 miles via the inside passage to Cape Spencer.

Anchorages.—Suitable anchorage in 30 fathoms is available for deep-draft vessels at the head of the bay in 60°06.5'N., 149°22.1'W. and in 60°06.5'N., 149°25.3'W.

Dangers.—The bay is clear but care should be taken when approaching the head of the bay to avoid the flats that extend 0.6 mile from the head.

Submerged ruins and obstructions may exist in an area about 550 yards channelward of the high water line at Seward.

Pilotage, Seward.—Pilotage, except for certain exempted vessels, is compulsory for all vessels navigating the waters of the State of Alaska. (See **Pilotage, General** (indexed), chapter 3, for the pilot pickup station and other details.)

Vessels en route Seward can contact the pilot boat by calling "SEWARD PILOT BOAT" on VHF-FM channel 16 or on a prearranged frequency between pilot and agent/vessel.

Quarantine.—A U.S. Public Health Service Contract Physician is located at the hospital in Seward. (See Appendix A for additional information.)

Quarantine is enforced in accordance with regulations of the U.S. Public Health Service. (See Public Health Service, chapter 1.) There is a hospital in Seward.

Ice.—There are discharging glaciers at the heads of Aialik Bay and Holgate Arm, and ice is frequently driven to Harbor Island by N winds. Holgate Arm and the entire bay above the bar are frequently filled with ice.

**U.S. Coast Guard Rescue Coordination Center
24 hour Regional Contact for Emergencies**

RCC Juneau Commander
17th CG District (907) 463-2000
Juneau, Alaska

Navigation Managers Area of Responsibility



NOAA's navigation managers serve as ambassadors to the maritime community.

They help identify navigational challenges facing professional and recreational mariners, and provide NOAA resources and information for safe navigation. For additional information, please visit nauticalcharts.noaa.gov/service/navmanagers

To make suggestions or ask questions online, go to nauticalcharts.noaa.gov/inquiry.

To report a chart discrepancy, please use ocsdata.ncd.noaa.gov/idrs/discrepancy.aspx.

Lateral System As Seen Entering From Seaward


on navigable waters except Western Rivers



For more information on aids to navigation, including those on Western Rivers, please consult the latest USCG Light List for your area. These volumes are available online at <http://www.navcen.uscg.gov>

NOAA encourages users to submit inquiries, discrepancies or comments about this chart at <http://www.nauticalcharts.noaa.gov/staff/contact.htm>.



16682

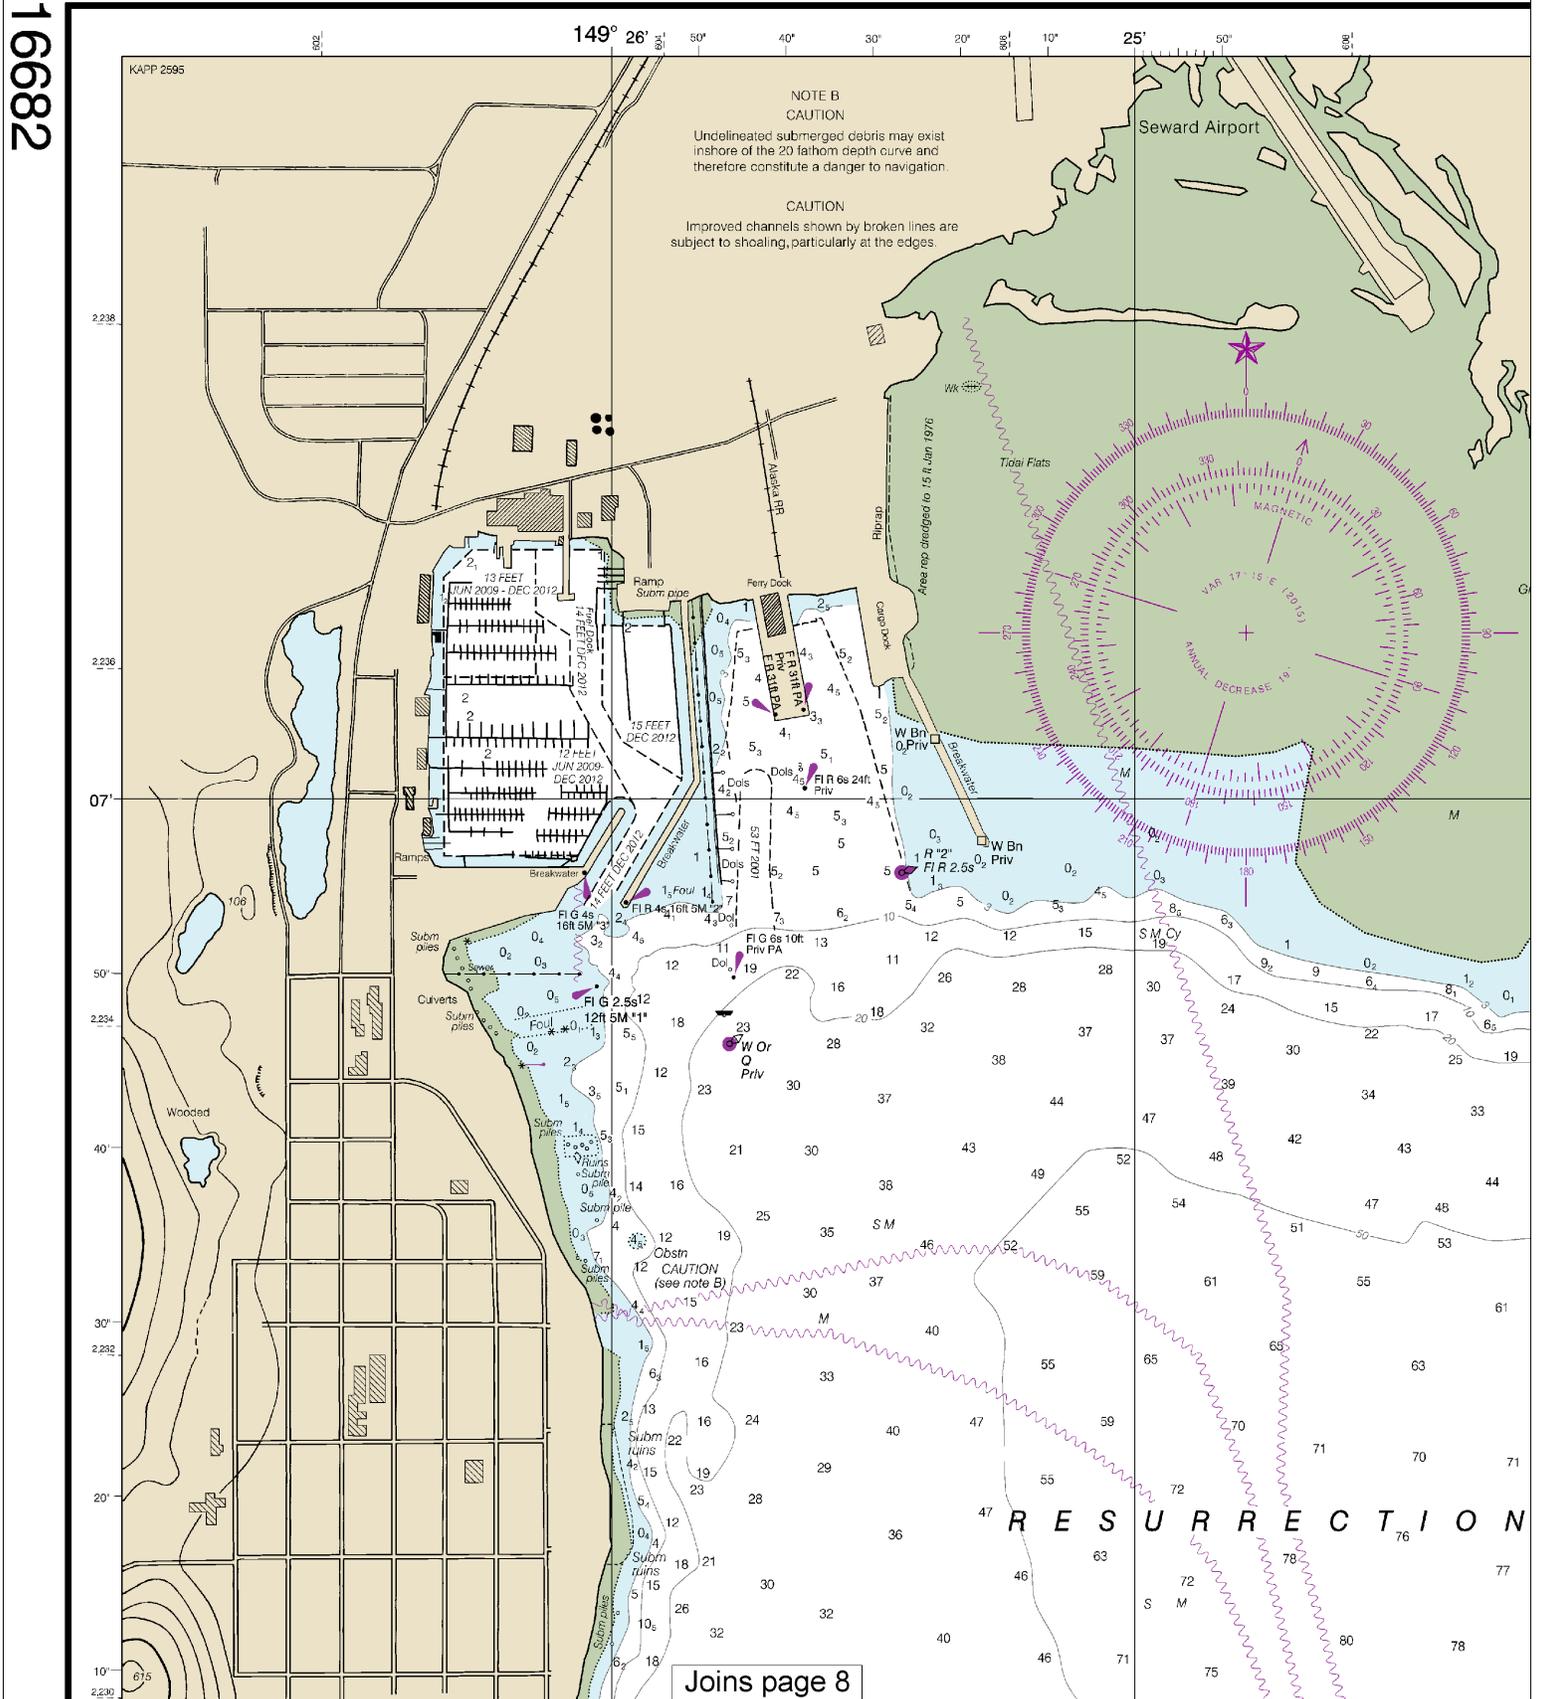

Joins page 8

4

Note: Chart grid lines are aligned with true north.

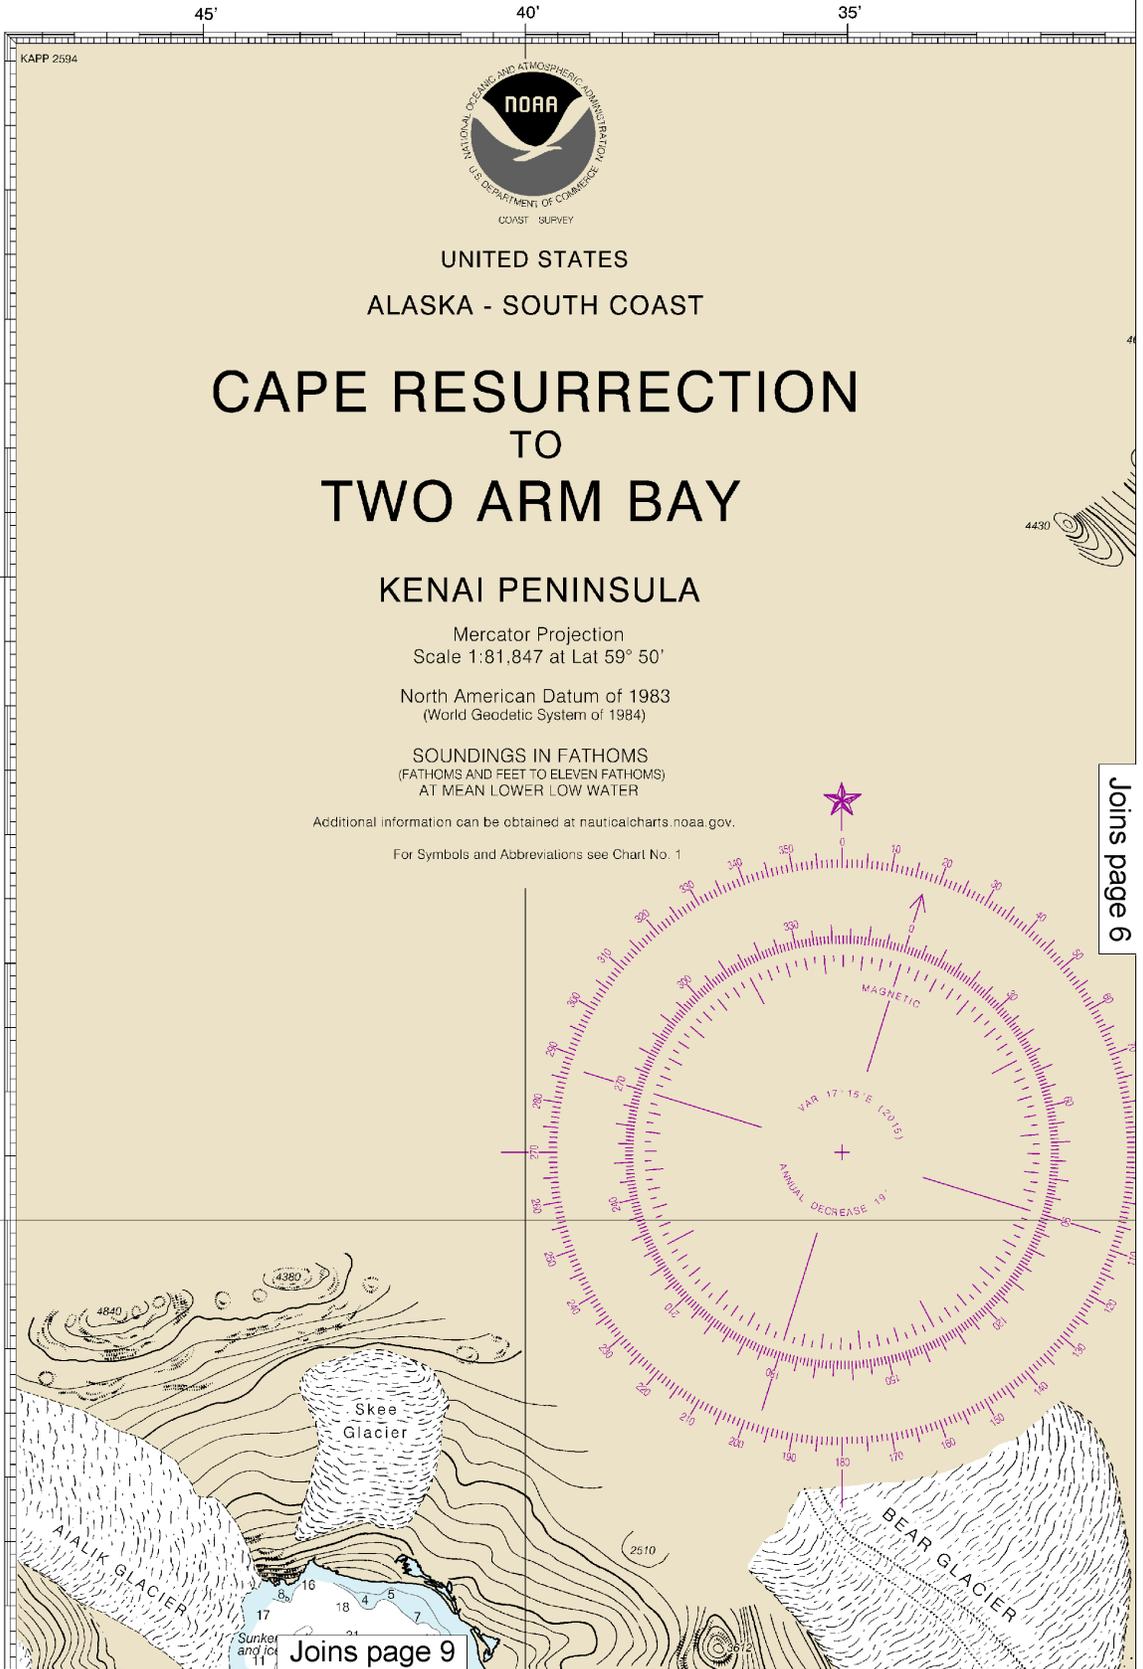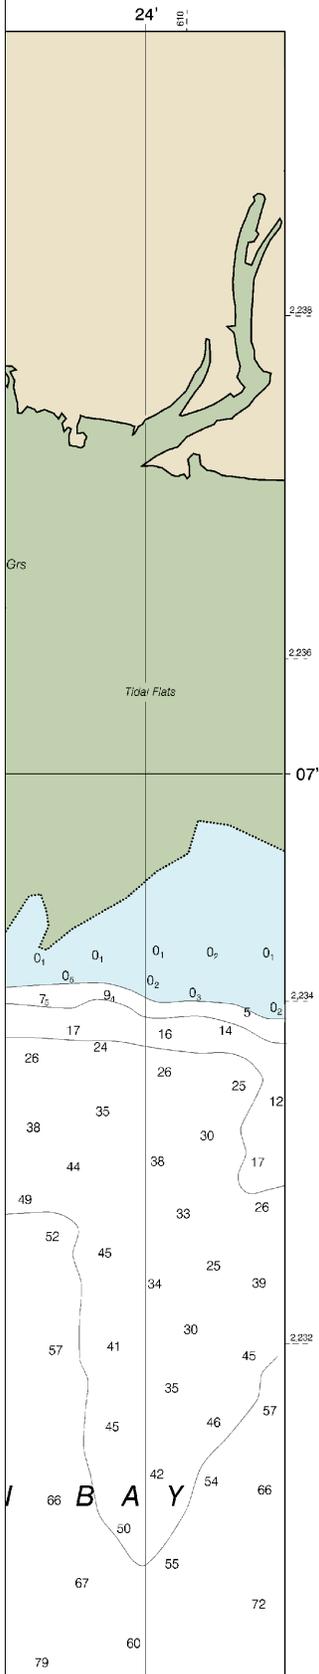


Joins page 9

This BookletChart was reduced to 75% of the original chart scale. The new scale is 1:109129. Barscales have also been reduced and are accurate when used to measure distances in this BookletChart.

VESSEL TRANSITING

Guard and the Pacific States/British Columbia Oil Spill
force a system of voluntary measures and minimum
shore for certain commercial vessels transiting along
here between Cook Inlet, Alaska and San Diego,
U.S.Coast Pilot 9: Chapter 3 for details.


Formerly C&GS 8529, 1st Ed., Apr. 1930 C-1950-345 KAPP 2594

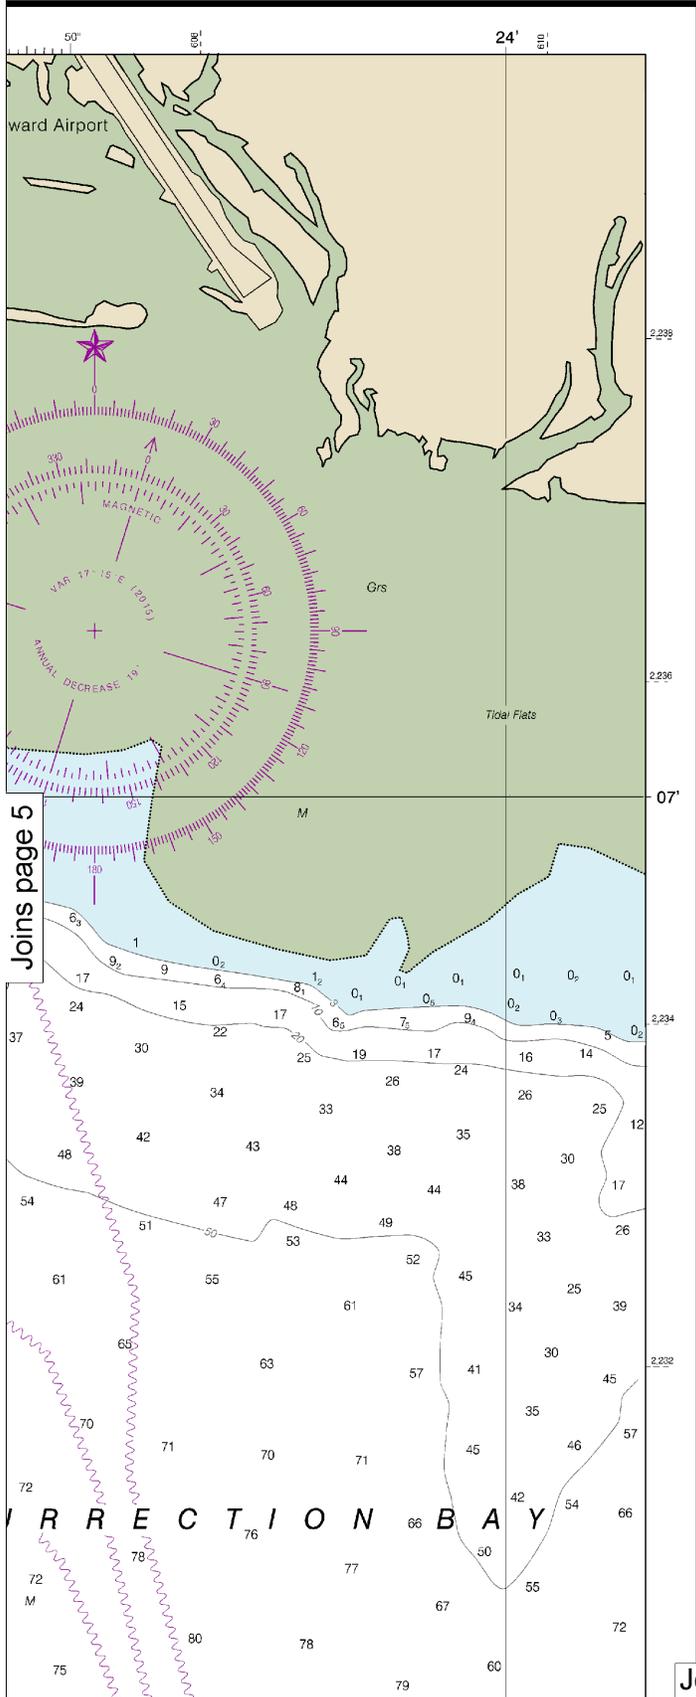



Joins page 5

RESURRECTION BAY



Joins page 10

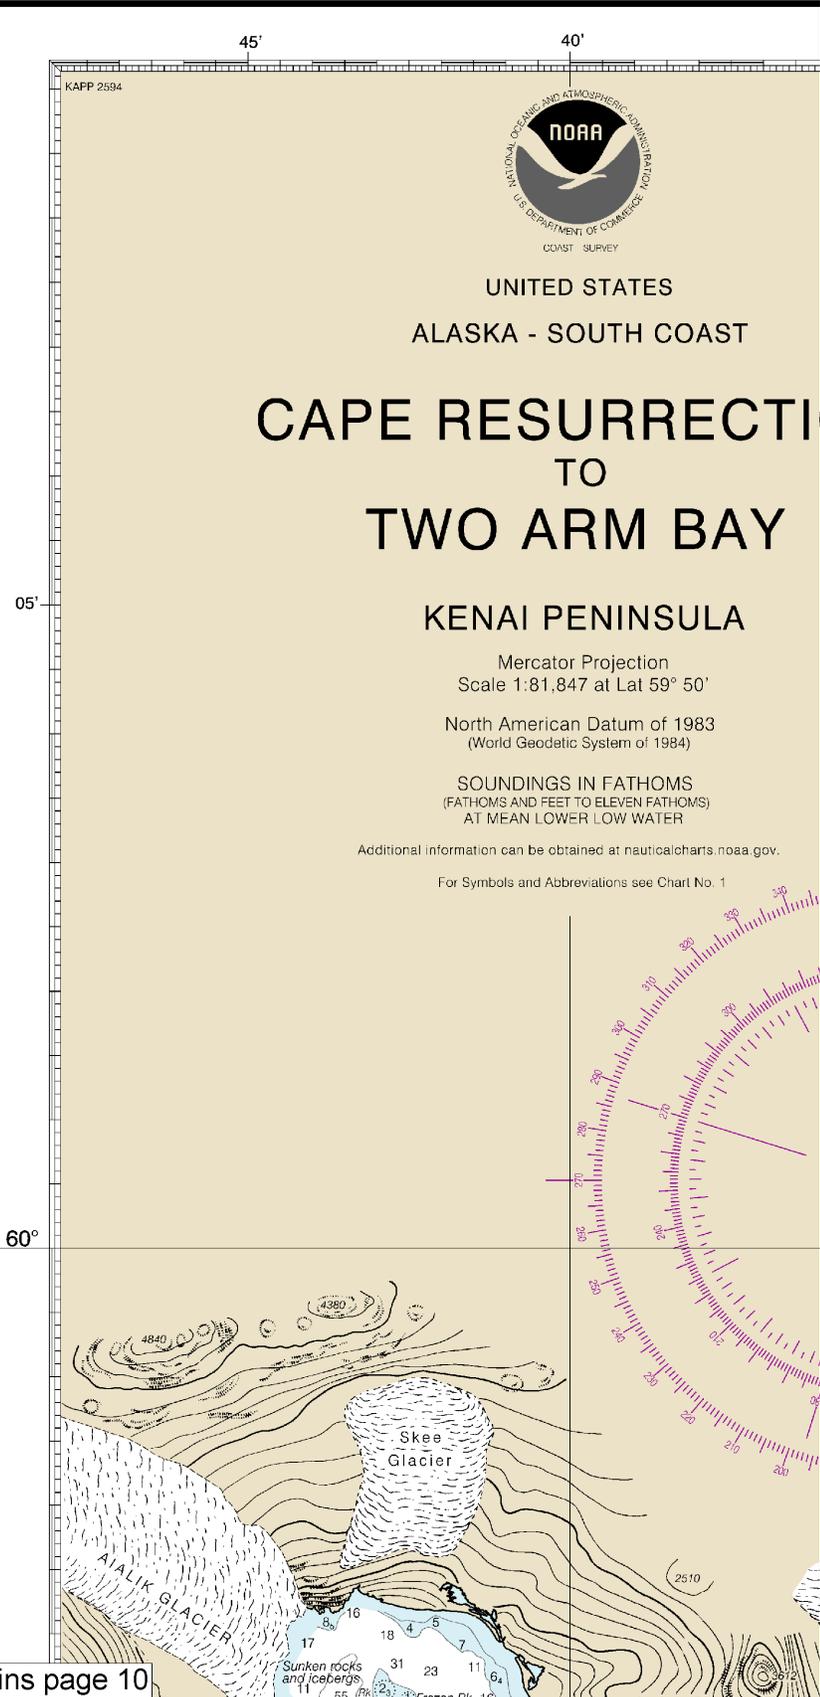


Note: Chart grid lines are aligned with true north.

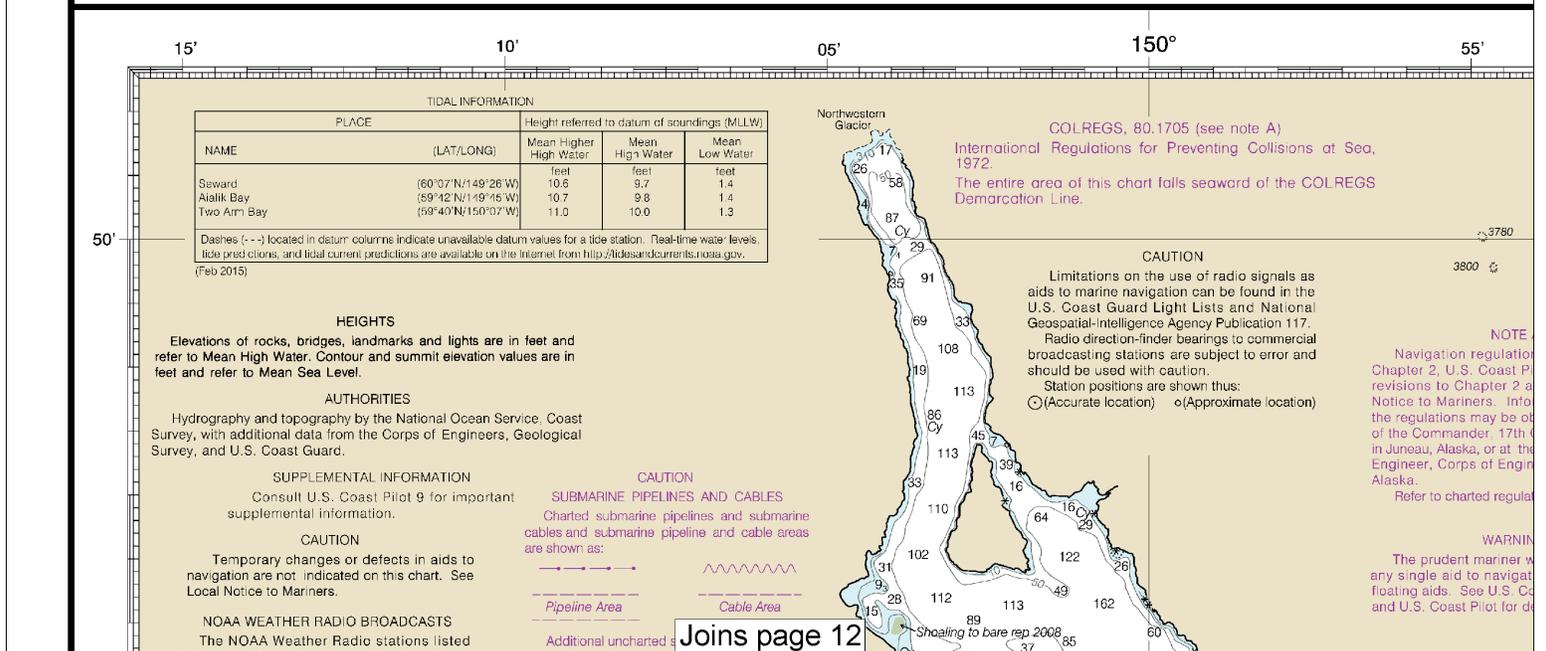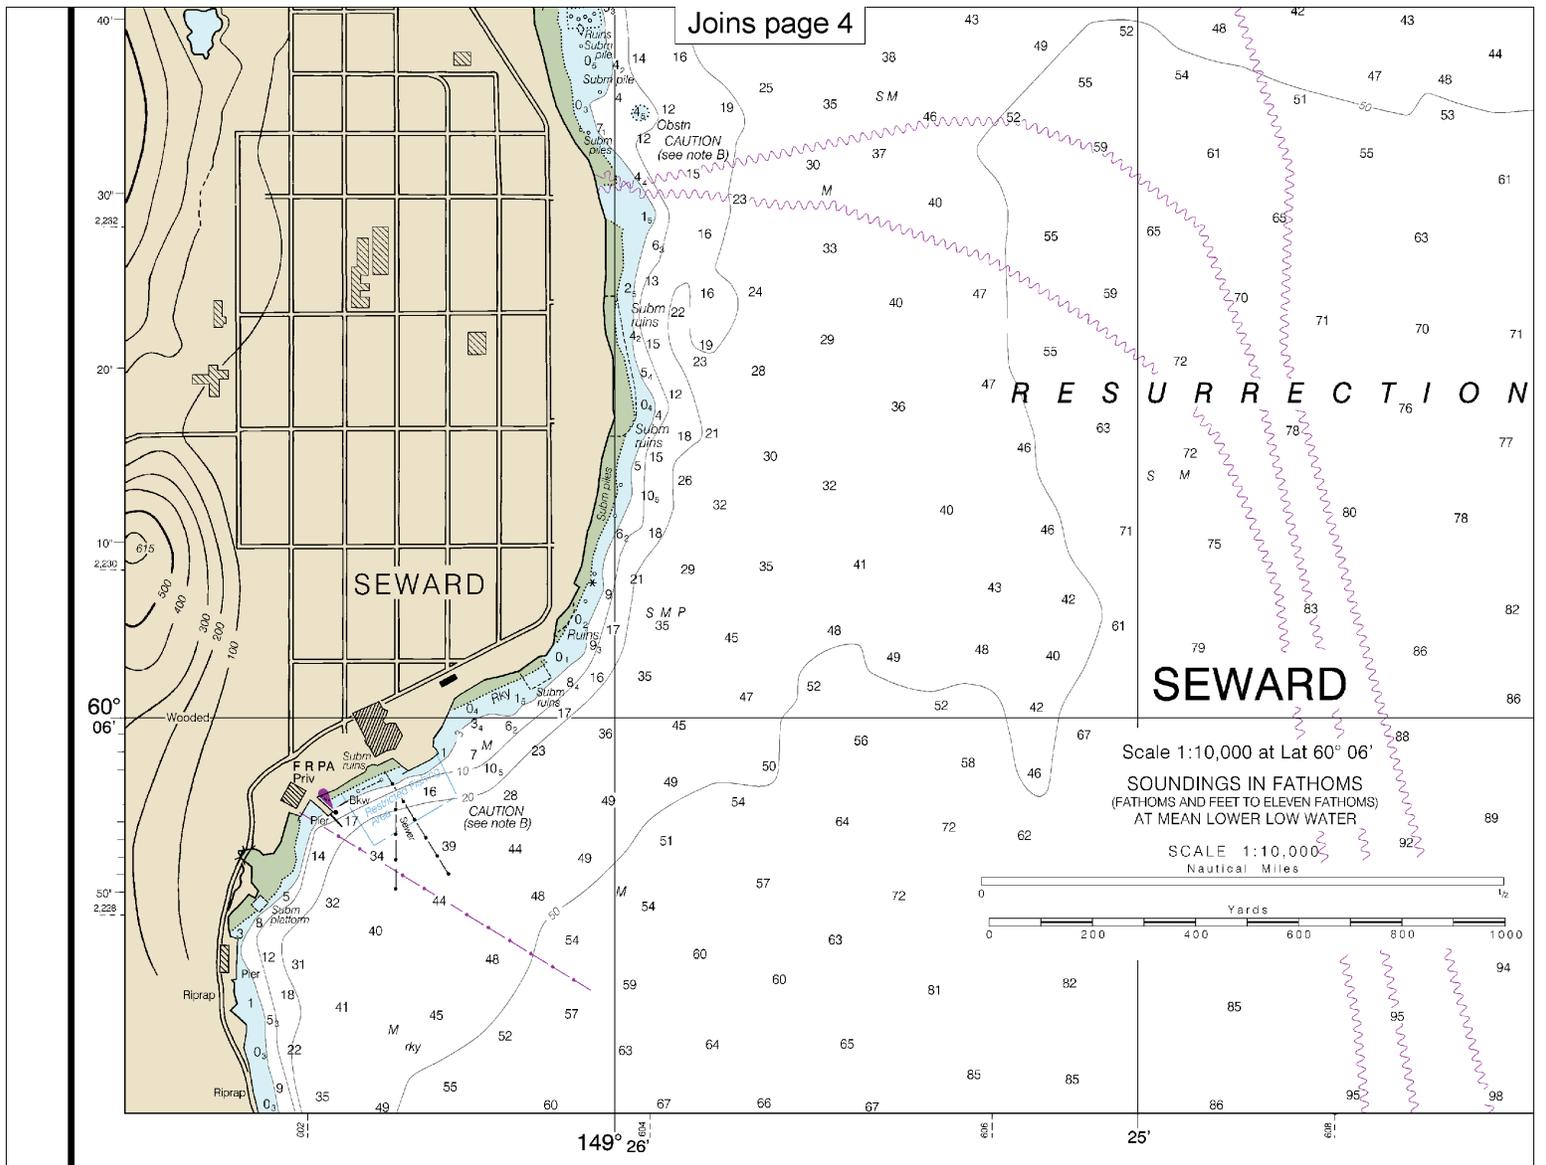

Note: Chart grid lines are aligned with true north.

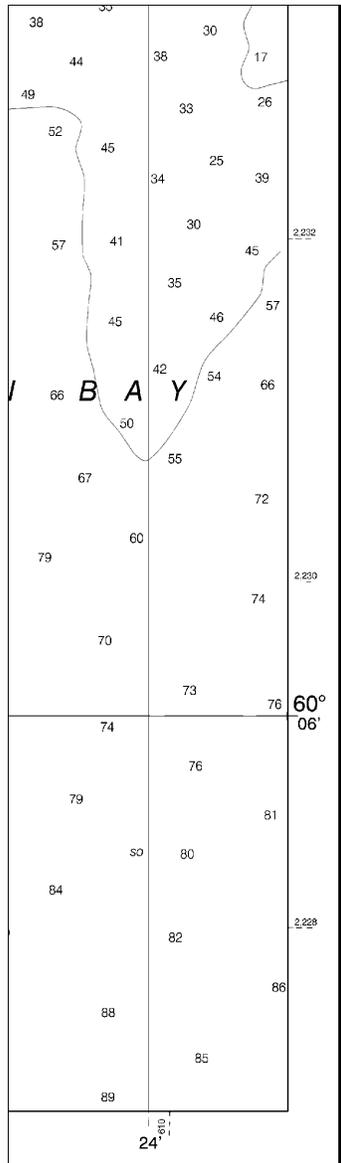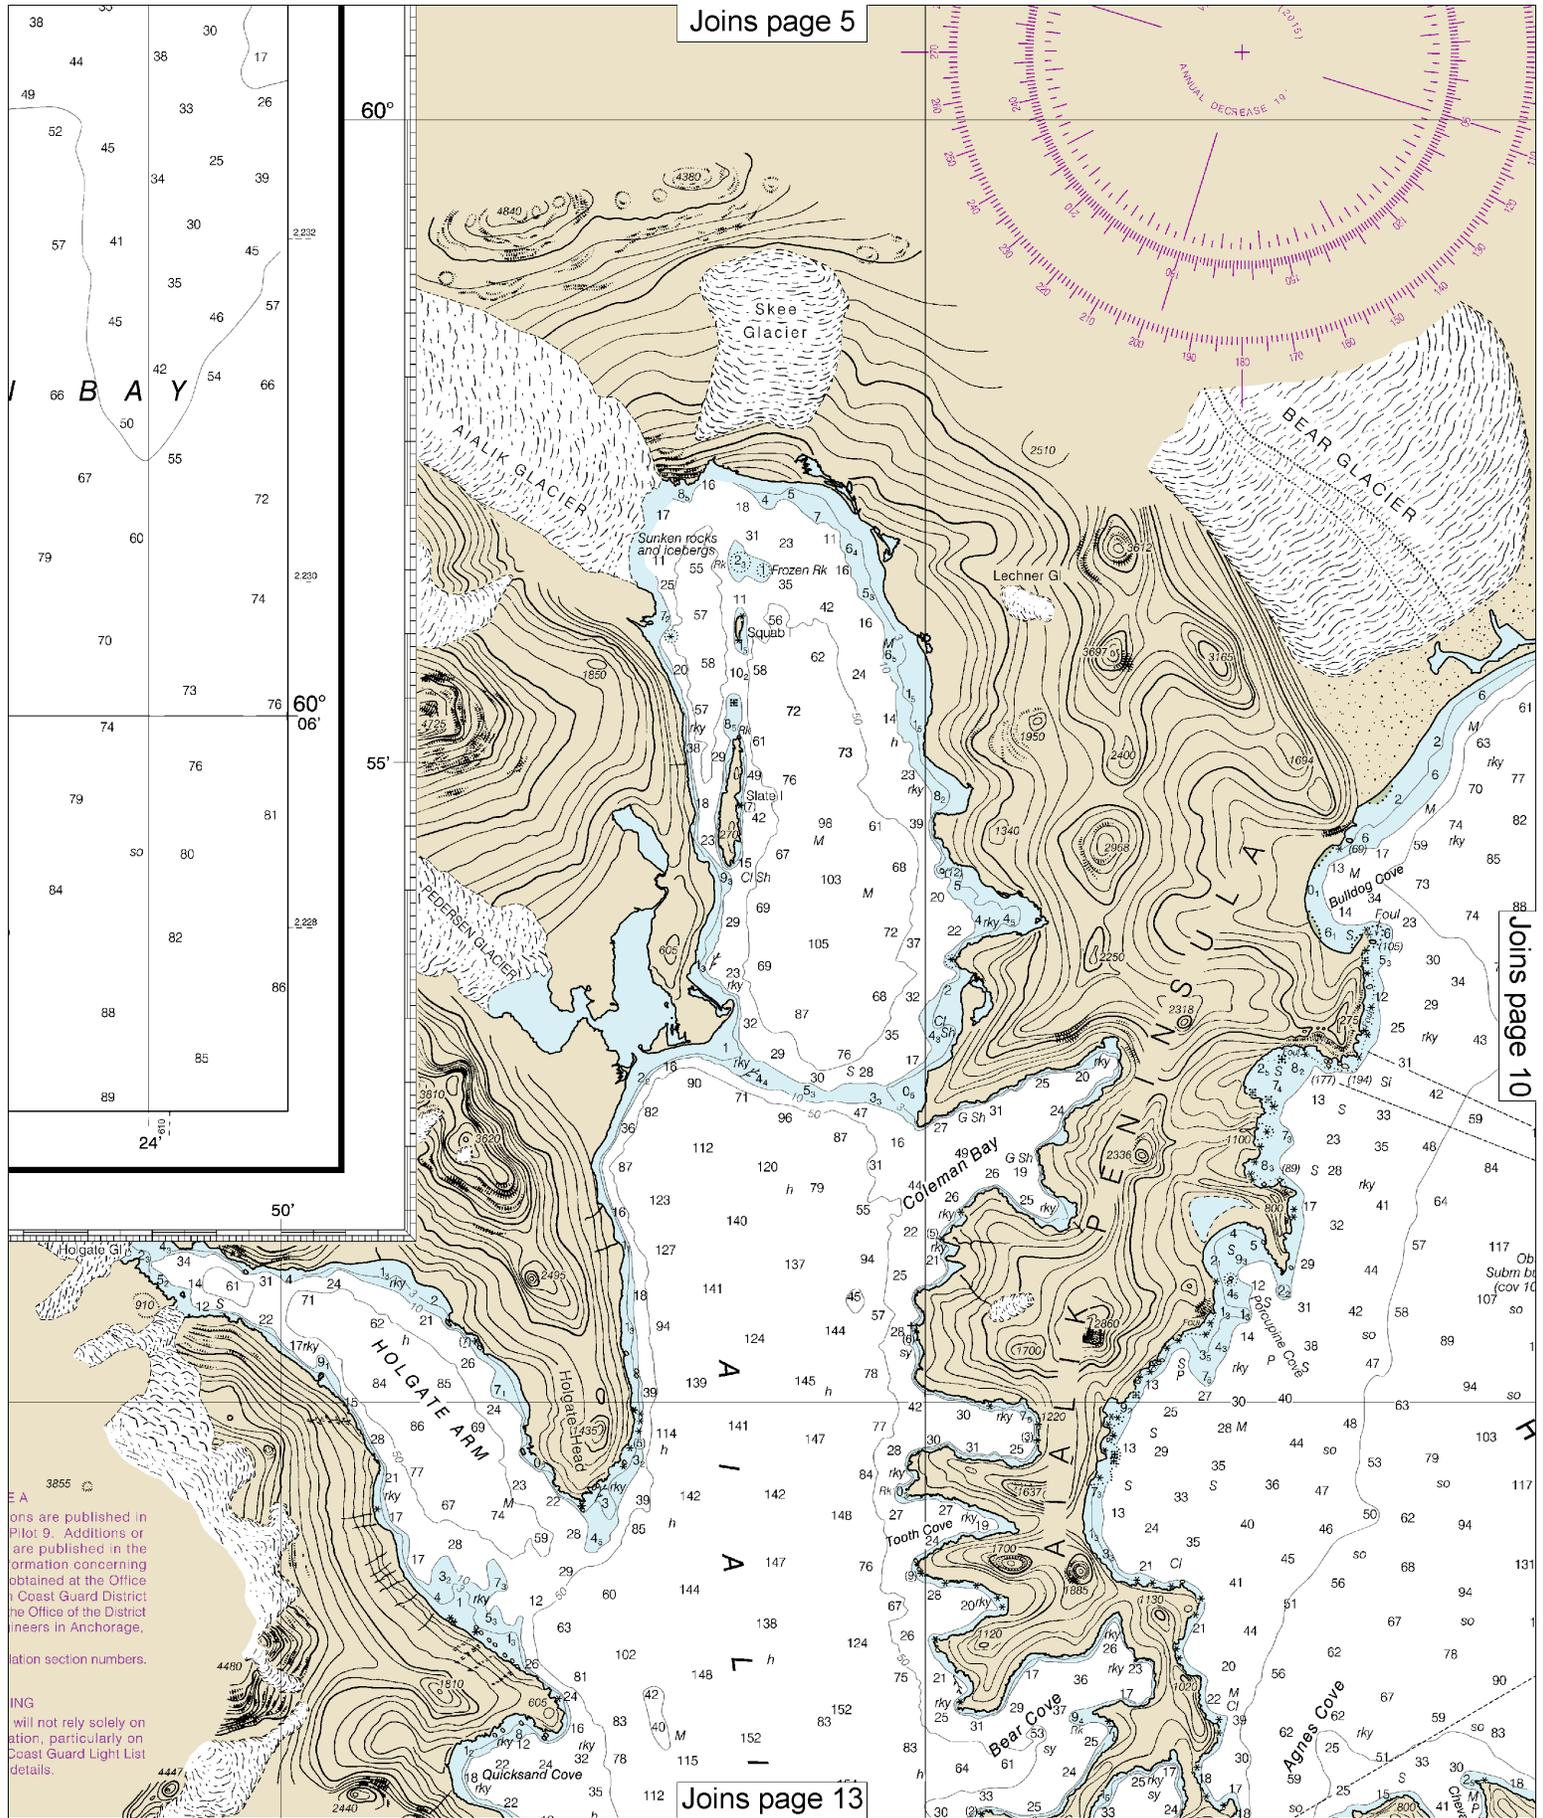

E A
 ons are published in
 Pilot 9. Additions or
 are published in the
 information concerning
 obtained at the Office
 Coast Guard District
 the Office of the District
 Instructors in Anchorage.
 ation section numbers.
 ING
 will not rely solely on
 ation, particularly on
 Coast Guard Light List
 details.

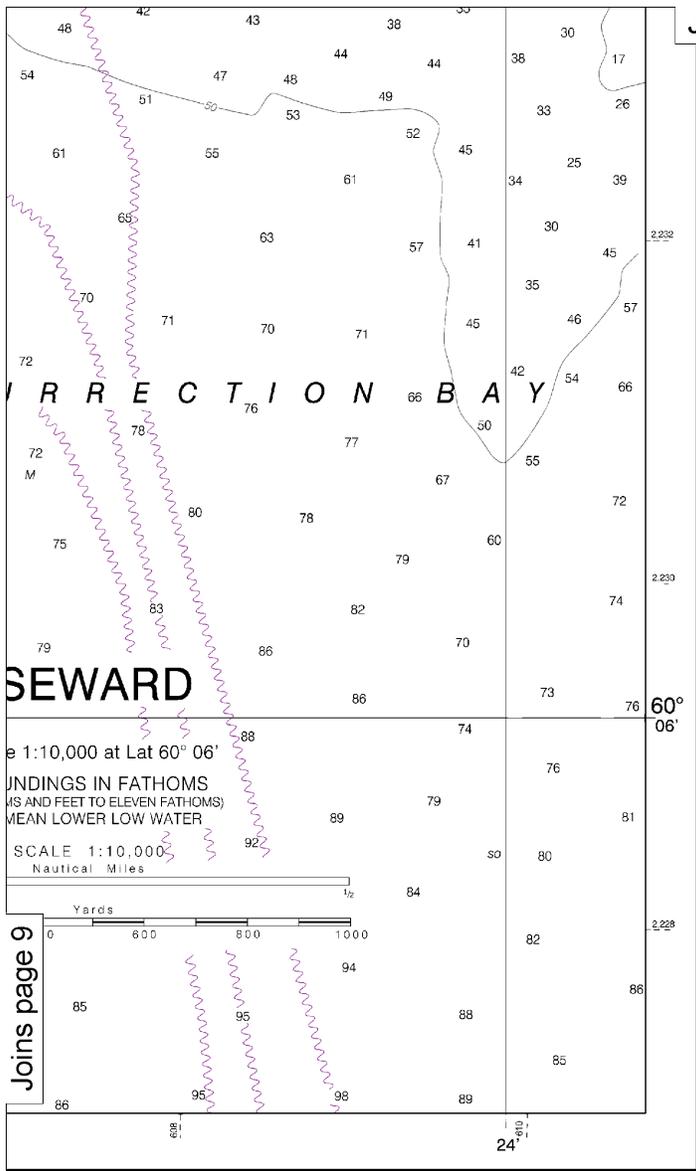


Joins page 6

60°

60° 06'

55'

Joins page 9

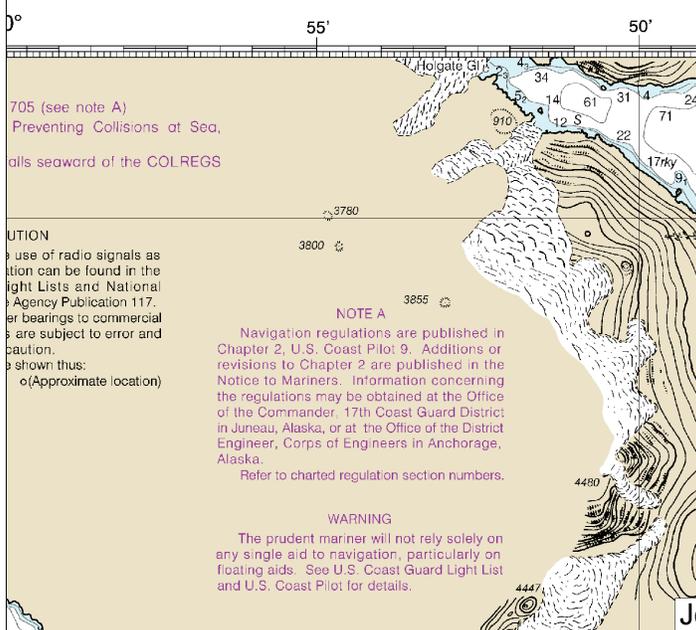


Joins page 14

705 (see note A)
Preventing Collisions at Sea,
rules seaward of the COLREGS

NOTE A
Navigation regulations are published in Chapter 2, U.S. Coast Pilot 9. Additions or revisions to Chapter 2 are published in the Notice to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 17th Coast Guard District, in Juneau, Alaska, or at the Office of the District Engineer, Corps of Engineers in Anchorage, Alaska.
Refer to charted regulation section numbers.

WARNING
The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

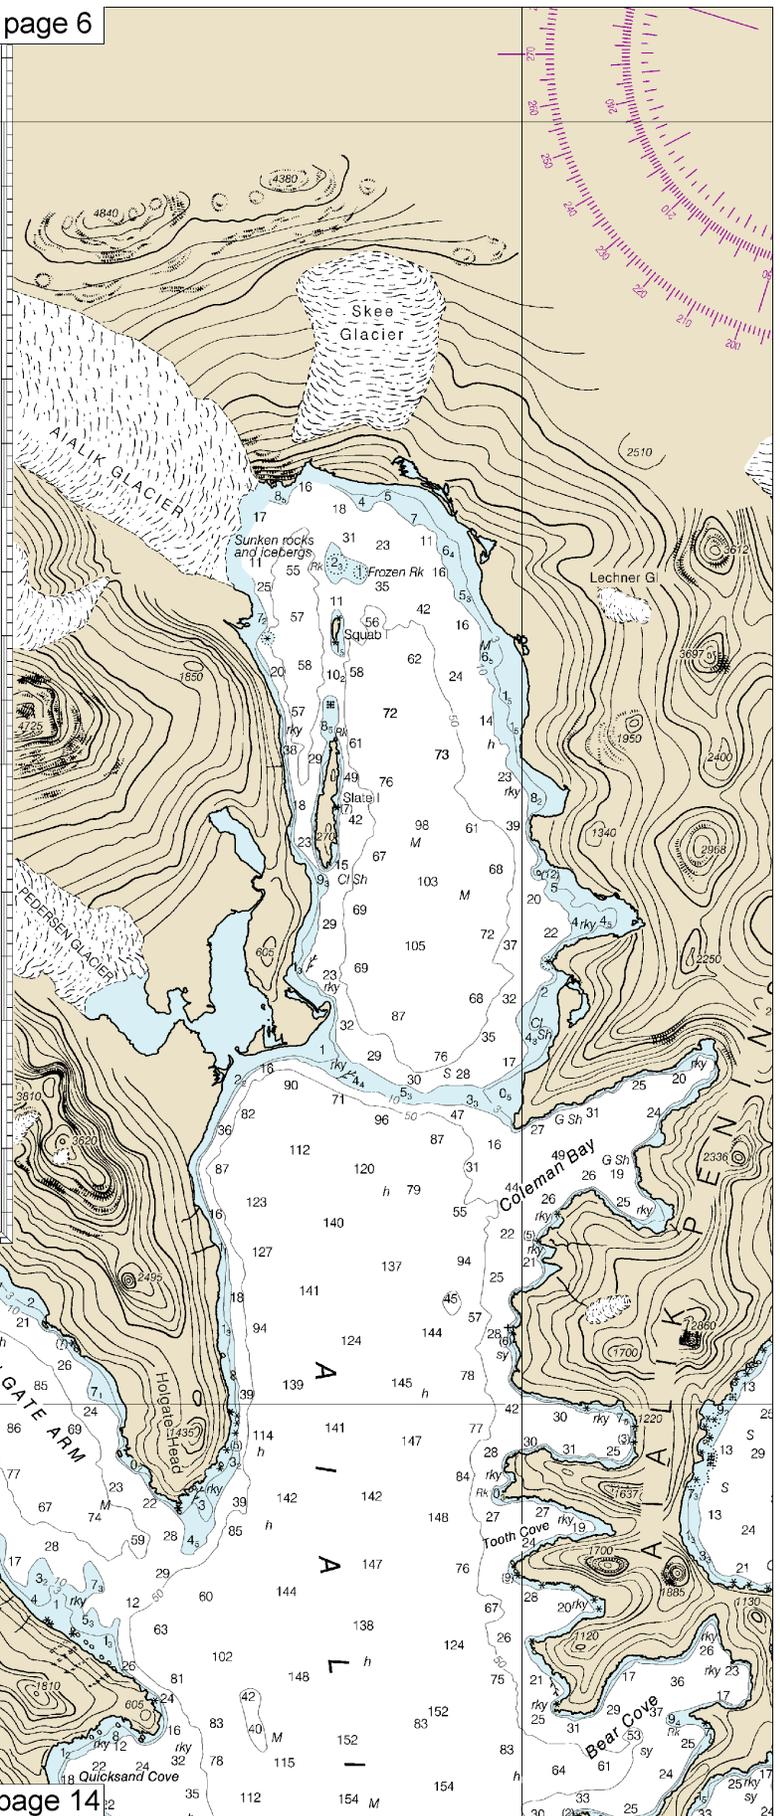

10

Note: Chart grid lines are aligned with true north.

TIDAL INFORMATION

PLACE	NAME (LAT/LONG)	Height referred to datum of station		
		Mean Higher High Water	Mean High Water	Mean Low Water
Seward	(60°07'N/149°26'W)	feet 10.6	feet 9.7	feet 1.4
Atalik Bay	(69°42'N/149°16'W)	10.7	9.8	1.4
Two Arm Bay	(69°40'N/150°07'W)	11.0	10.0	1.3

Dashes (---) located in datum columns indicate unavailable datum values for a tide station. Real-time water levels, tide predictions, and tidal current predictions are available on the Internet from <http://tidesandcurrents.noaa.gov>. (Feb 2015)

HEIGHTS

Elevations of rocks, bridges, landmarks and lights are in feet and refer to Mean High Water. Contour and summit elevation values are in feet and refer to Mean Sea Level.

AUTHORITIES

Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, Geological Survey, and U.S. Coast Guard.

SUPPLEMENTAL INFORMATION

Consult U.S. Coast Pilot 9 for important supplemental information.

CAUTION

Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.

NOAA WEATHER RADIO BROADCASTS


The NOAA Weather Radio stations listed below provide continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be as much as 100 nautical miles for stations at high elevations.

Point Pigot, AK	KZZ-93	162.450 MHz
Ninlichik, AK	KZZ-97	162.550 MHz
Rugged I, AK	WNG-526	162.425 MHz
Homer, AK	WXJ-24	162.400 MHz
Seward, AK	KEC-81	162.550 MHz

SOURCE DIAGRAM

The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U.S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, United States Coast Pilot.

SOURCE			
A	1990 - 2001	NOS Surveys	full bottom coverage
B4	1900 - 1939	NOS Surveys	partial bottom coverage

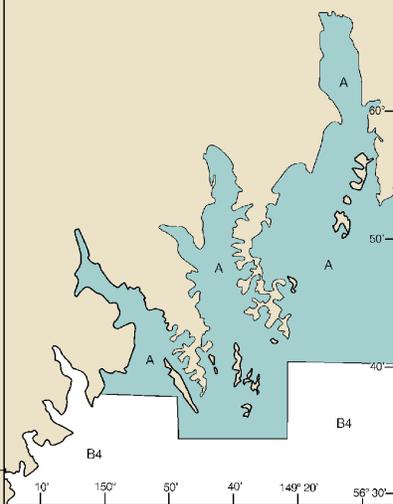

AIDS TO NAVIGATION
Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

COLREGS, 80.1705 (see note A)

International Regulations for Preventing Collisions at Sea, 1972

The entire area of this chart falls seaward of the COLREGS Demarcation Line.

CAUTION

Limitations on the use of radio signals as aids to marine navigation can be found in the U.S. Coast Guard Light Lists and National Geospatial-Intelligence Agency Publication 117. Radio direction-finder bearings to commercial broadcasting stations are subject to error and should be used with caution.

Station positions are shown thus:
○ (Accurate location) ○ (Approximate location)

NOTE

Navigation regulation Chapter 2, U.S. Coast Pilot revisions to Chapter 2 a Notice to Mariners. Info the regulations may be of the Commander, 17th Fl in Juneau, Alaska, or at the Engineer, Corps of Eng Alaska.

Refer to charted regula

WARNING

The prudent mariner w any single aid to navigat floating aids. See U.S. Co and U.S. Coast Pilot for d

CAUTION
SUBMARINE PIPELINES AND CABLES
Charted submarine pipelines and submarine cables and submarine pipeline and cable areas are shown as:



Additional uncharted submarine pipelines and submarine cables may exist within the area of this chart. Not all submarine pipelines and submarine cables are required to be buried, and those that were originally buried may have become exposed. Mariners should use extreme caution when operating vessels in depths of water comparable to their draft in areas where pipelines and cables may exist, and when anchoring, dragging, or trawling. Covered wells may be marked by lighted or unlighted buoys.

POLLUTION REPORTS

Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

RADAR REFLECTORS

Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

HORIZONTAL DATUM


The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83), which for charting purposes is considered equivalent to the World Geodetic System 1984 (WGS 84). Geographic positions referred to the North American Datum of 1927 must be corrected an average of 2.488' southward and 7.329' westward to agree with this chart.

CAUTION

The entire area of this chart is affected by land uplift due to forces such as postseismic crustal rebound. As a result, the tidal datums including mean lower low water, the plane of reference used for depth soundings, have changed throughout this region. Tidal datums were updated in 1999 and depths of 1 1/2 fathoms or less on this chart were adjusted accordingly, to account for this uplift. As the uplift rates can only be estimated and areas continue to rise, depths may be shallower than charted. Mariners are urged to exercise caution.

PENINSULA


Note: Chart grid lines are aligned with true north.

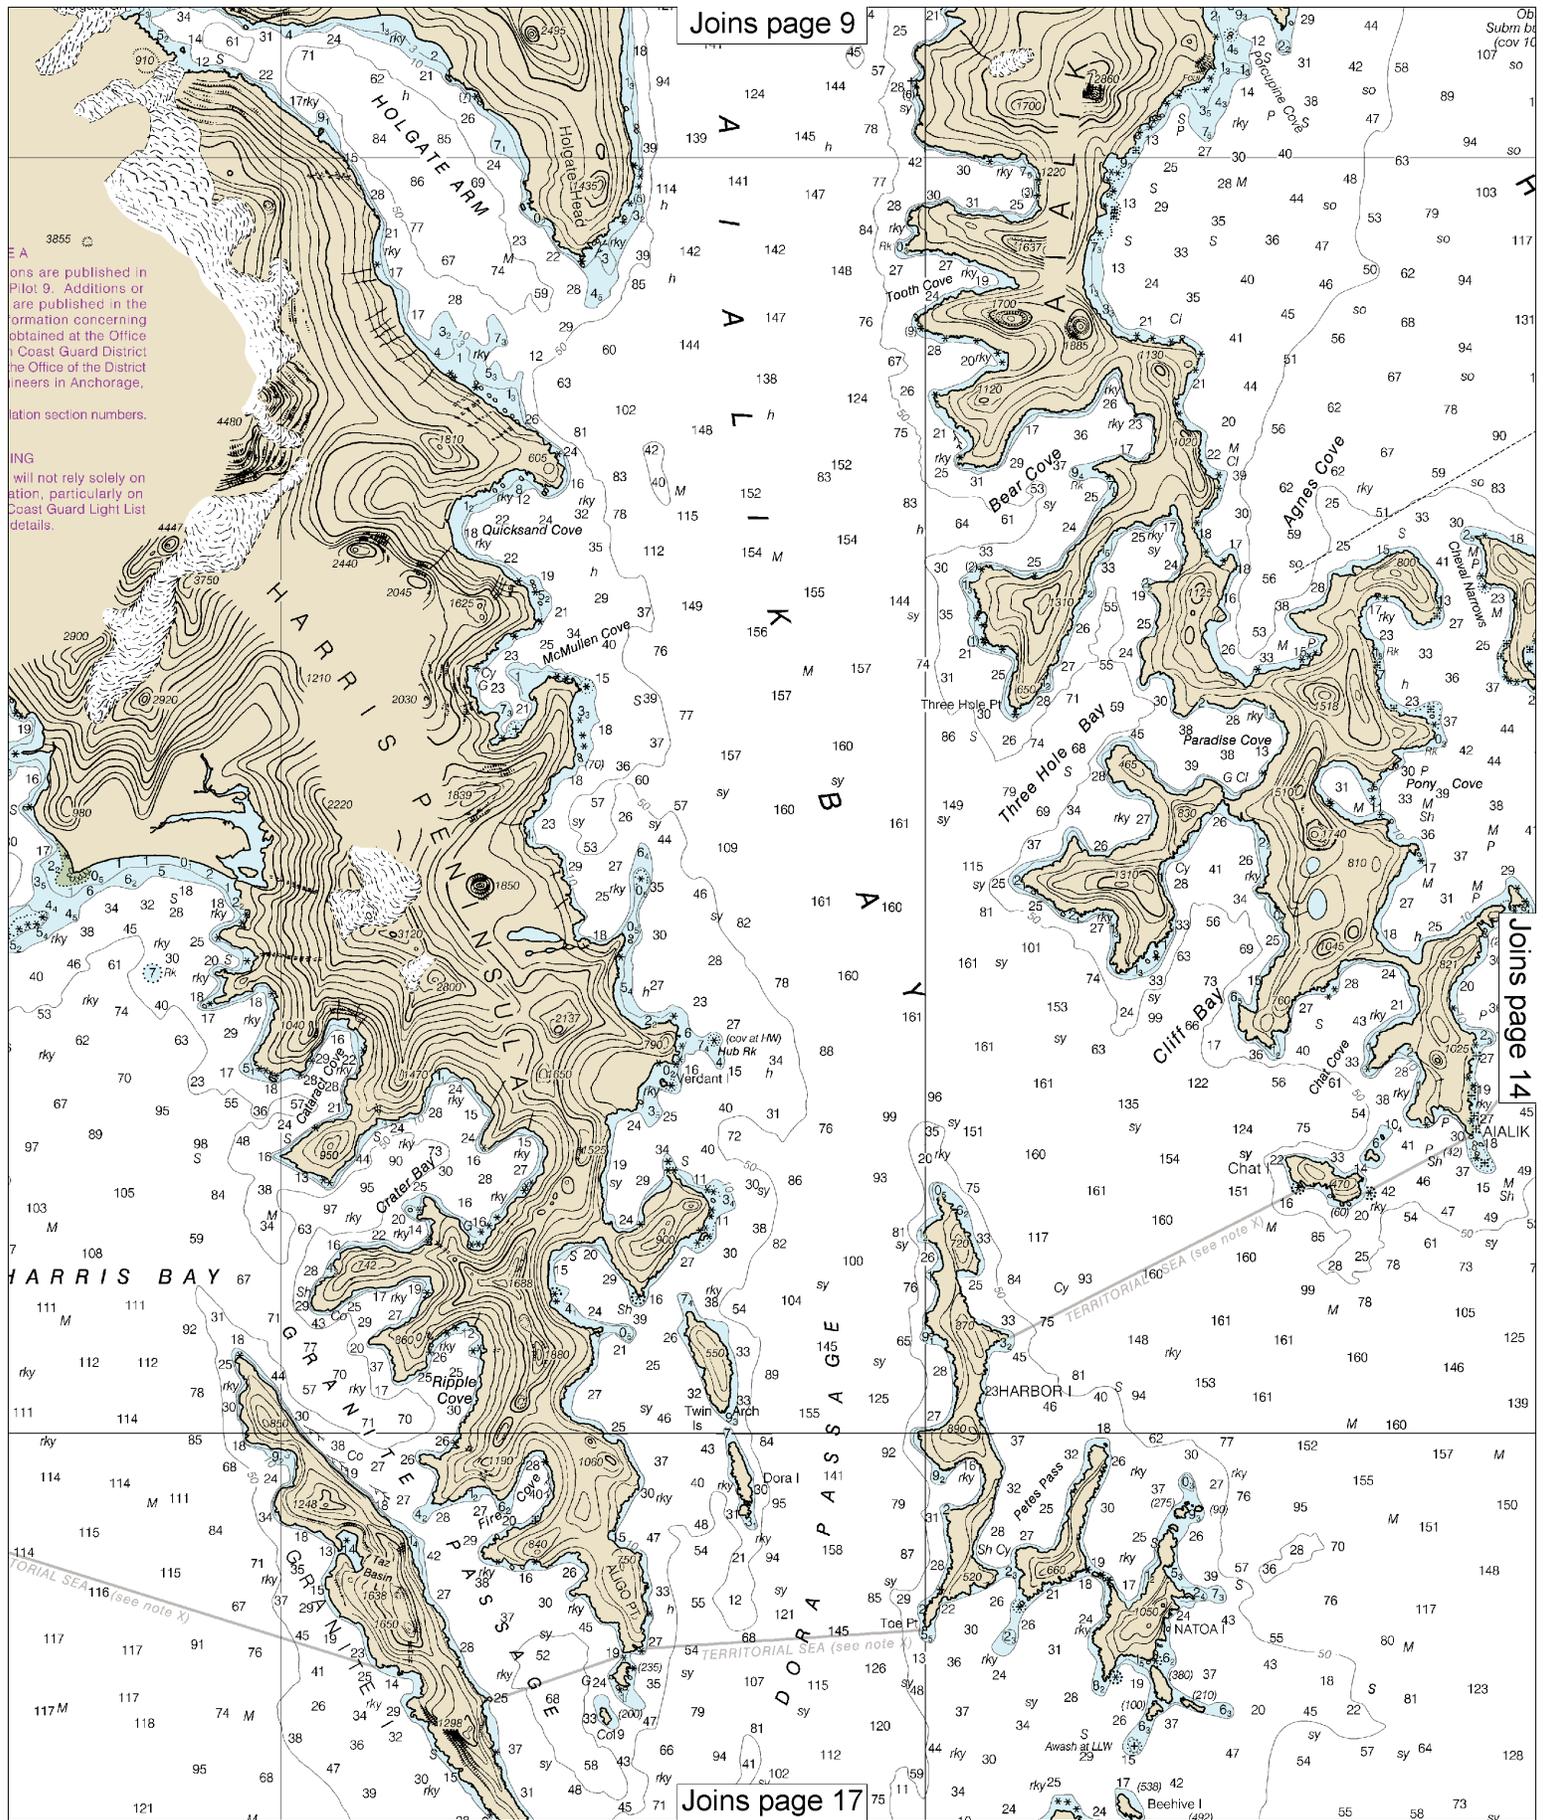

These charts are published in Pilot 9. Additions or corrections are published in the form of amendments. For information concerning amendments, contact the Office of the District Coast Guard District Office or the Office of the District Engineer in Anchorage.

Information section numbers.

Users will not rely solely on this information, particularly on Coast Guard Light List details.

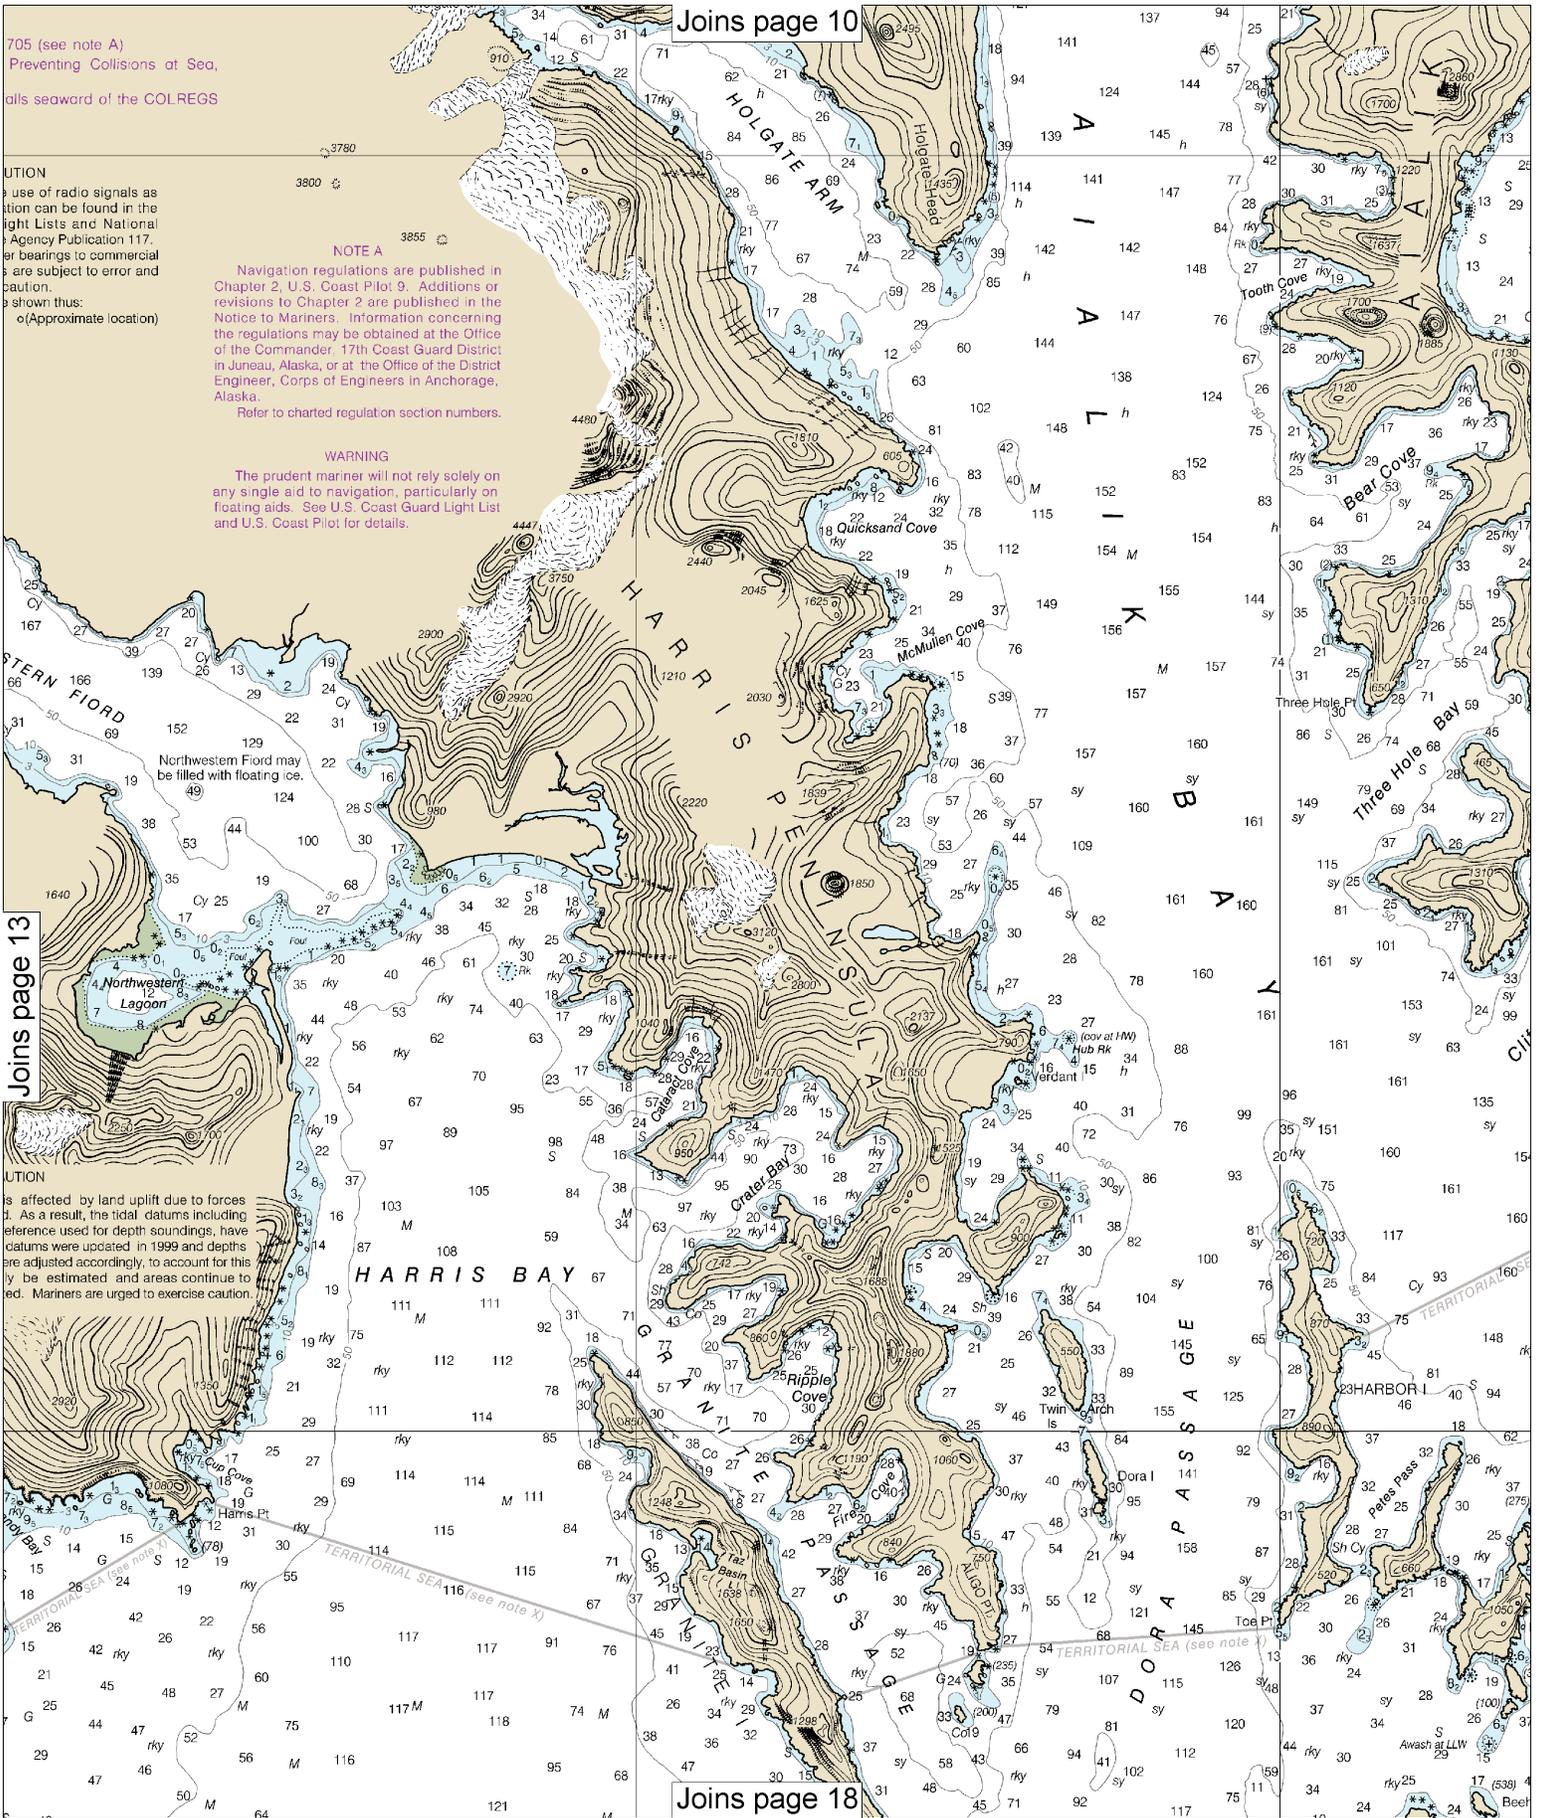

705 (see note A)
Preventing Collisions at Sea,
alls seaward of the COLREGS

UTION
use of radio signals as
tion can be found in the
ght Lists and National
Agency Publication 117.
er bearings to commercial
s are subject to error and
caution.
shown thus:
o (Approximate location)

NOTE A
Navigation regulations are published in Chapter 2, U.S. Coast Pilot 9. Additions or revisions to Chapter 2 are published in the Notice to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 17th Coast Guard District in Juneau, Alaska, or at the Office of the District Engineer, Corps of Engineers in Anchorage, Alaska.
Refer to charted regulation section numbers.

WARNING
The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

Western Fiord
Northwestern Fiord may be filled with floating ice.

UTION
is affected by land uplift due to forces
1. As a result, the tidal datums including
reference used for depth soundings, have
datums were updated in 1999 and depths
are adjusted accordingly, to account for this
ly be estimated and areas continue to
ed. Mariners are urged to exercise caution.


TERRITORIAL SEA (see note X)

TERRITORIAL SEA (see note X)

TERRITORIAL SEA (see note X)

Joins page 10

Joins page 18

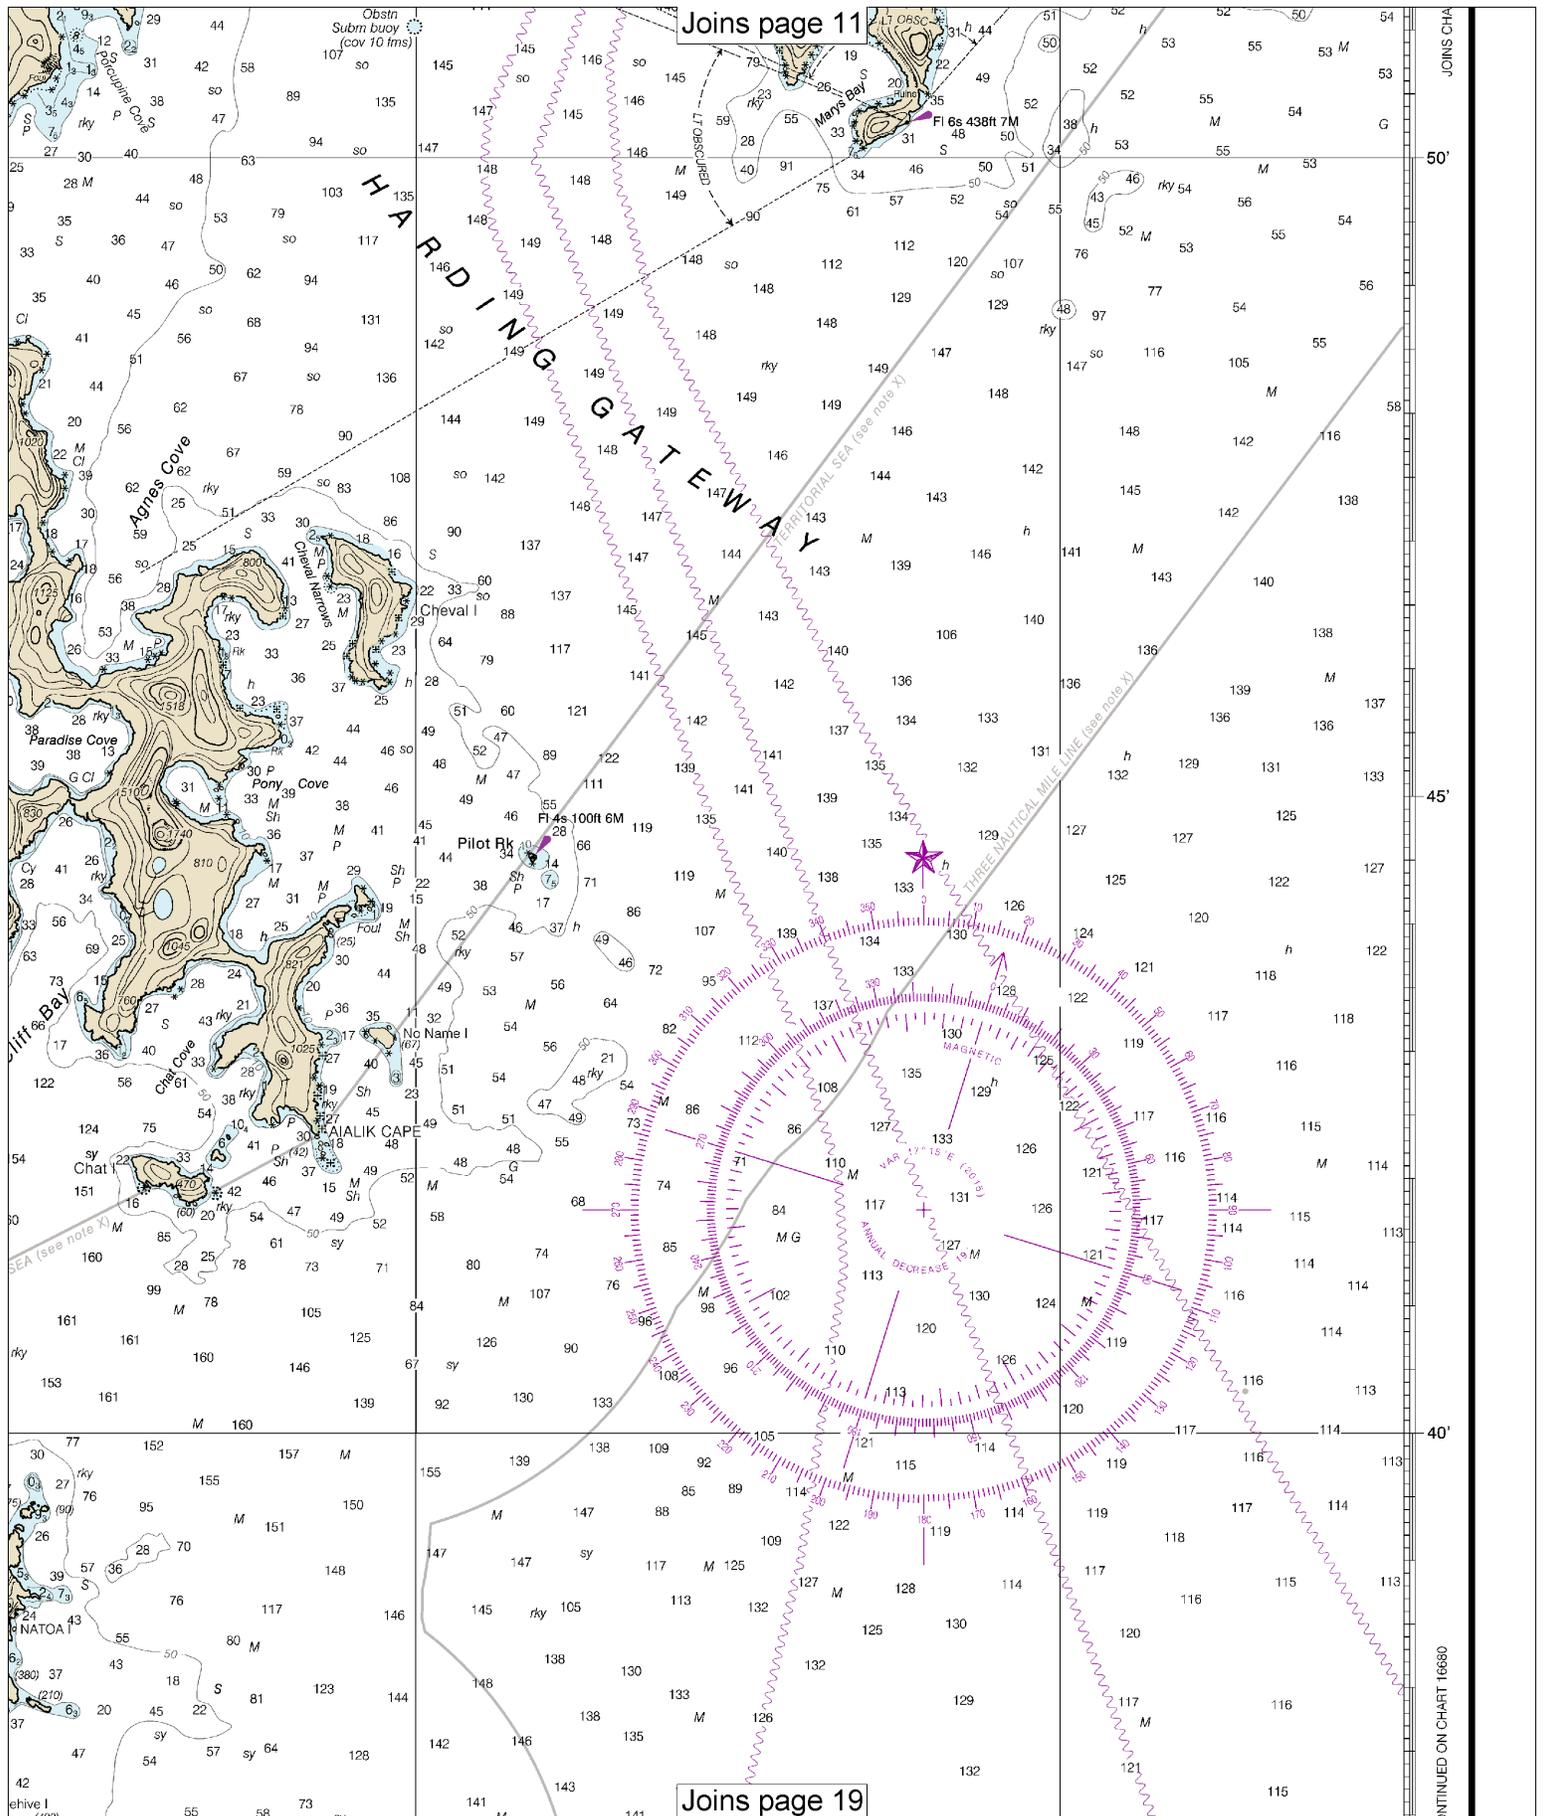

JOINS CHA
50'
45'
40'
CONTINUED ON CHART 16680

Joins page 12

of 11 1/2 fathoms or less on this chart were adjusted accordingly, to account for this uplift. As the uplift rates can only be estimated and areas continue to rise, depths may be shallower than charted. Mariners are urged to exercise caution

AIDS TO NAVIGATION
Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

KENAI PENINSULA

TAROK ARM

PAGUNA ARM

TWO ARM BAY

THUNDER BAY

BLACK BAY

Cloudy Mt. 1900
Cloudy Cape 24

Black Mt. 1872

Cloudy Mt. 1900

Cloudy Cape 24

Black Mt. 1872

Cloudy Mt. 1900

15' 10' 5' 0' 55'

15' 10' 5' 0' 55'

15' 10' 5' 0' 55'

15' 10' 5' 0' 55'

15' 10' 5' 0' 55'

15' 10' 5' 0' 55'

CONTINUED ON CHART 16681

CAUTION

This chart has been corrected from the Notice to Mariners (NM) published weekly by the National Geospatial-Intelligence Agency and the Local Notice to Mariners (LNM) issued periodically by each U.S. Coast Guard district to the dates shown in the lower left hand corner. Chart updates corrected from Notice to Mariners published after the dates shown in the lower left hand corner are available at nauticalcharts.noaa.gov.


16682

18th Ed., May 2015. Last Correction: 5/6/2015. Cleared through:
LNM: 4916 (12/6/2016), NM: 5116 (12/17/2016), CHS: 1116 (11/25/2016)

SOUNDINGS IN
(FATHOMS AND FEET T)

16

Note: Chart grid lines are aligned with true north.

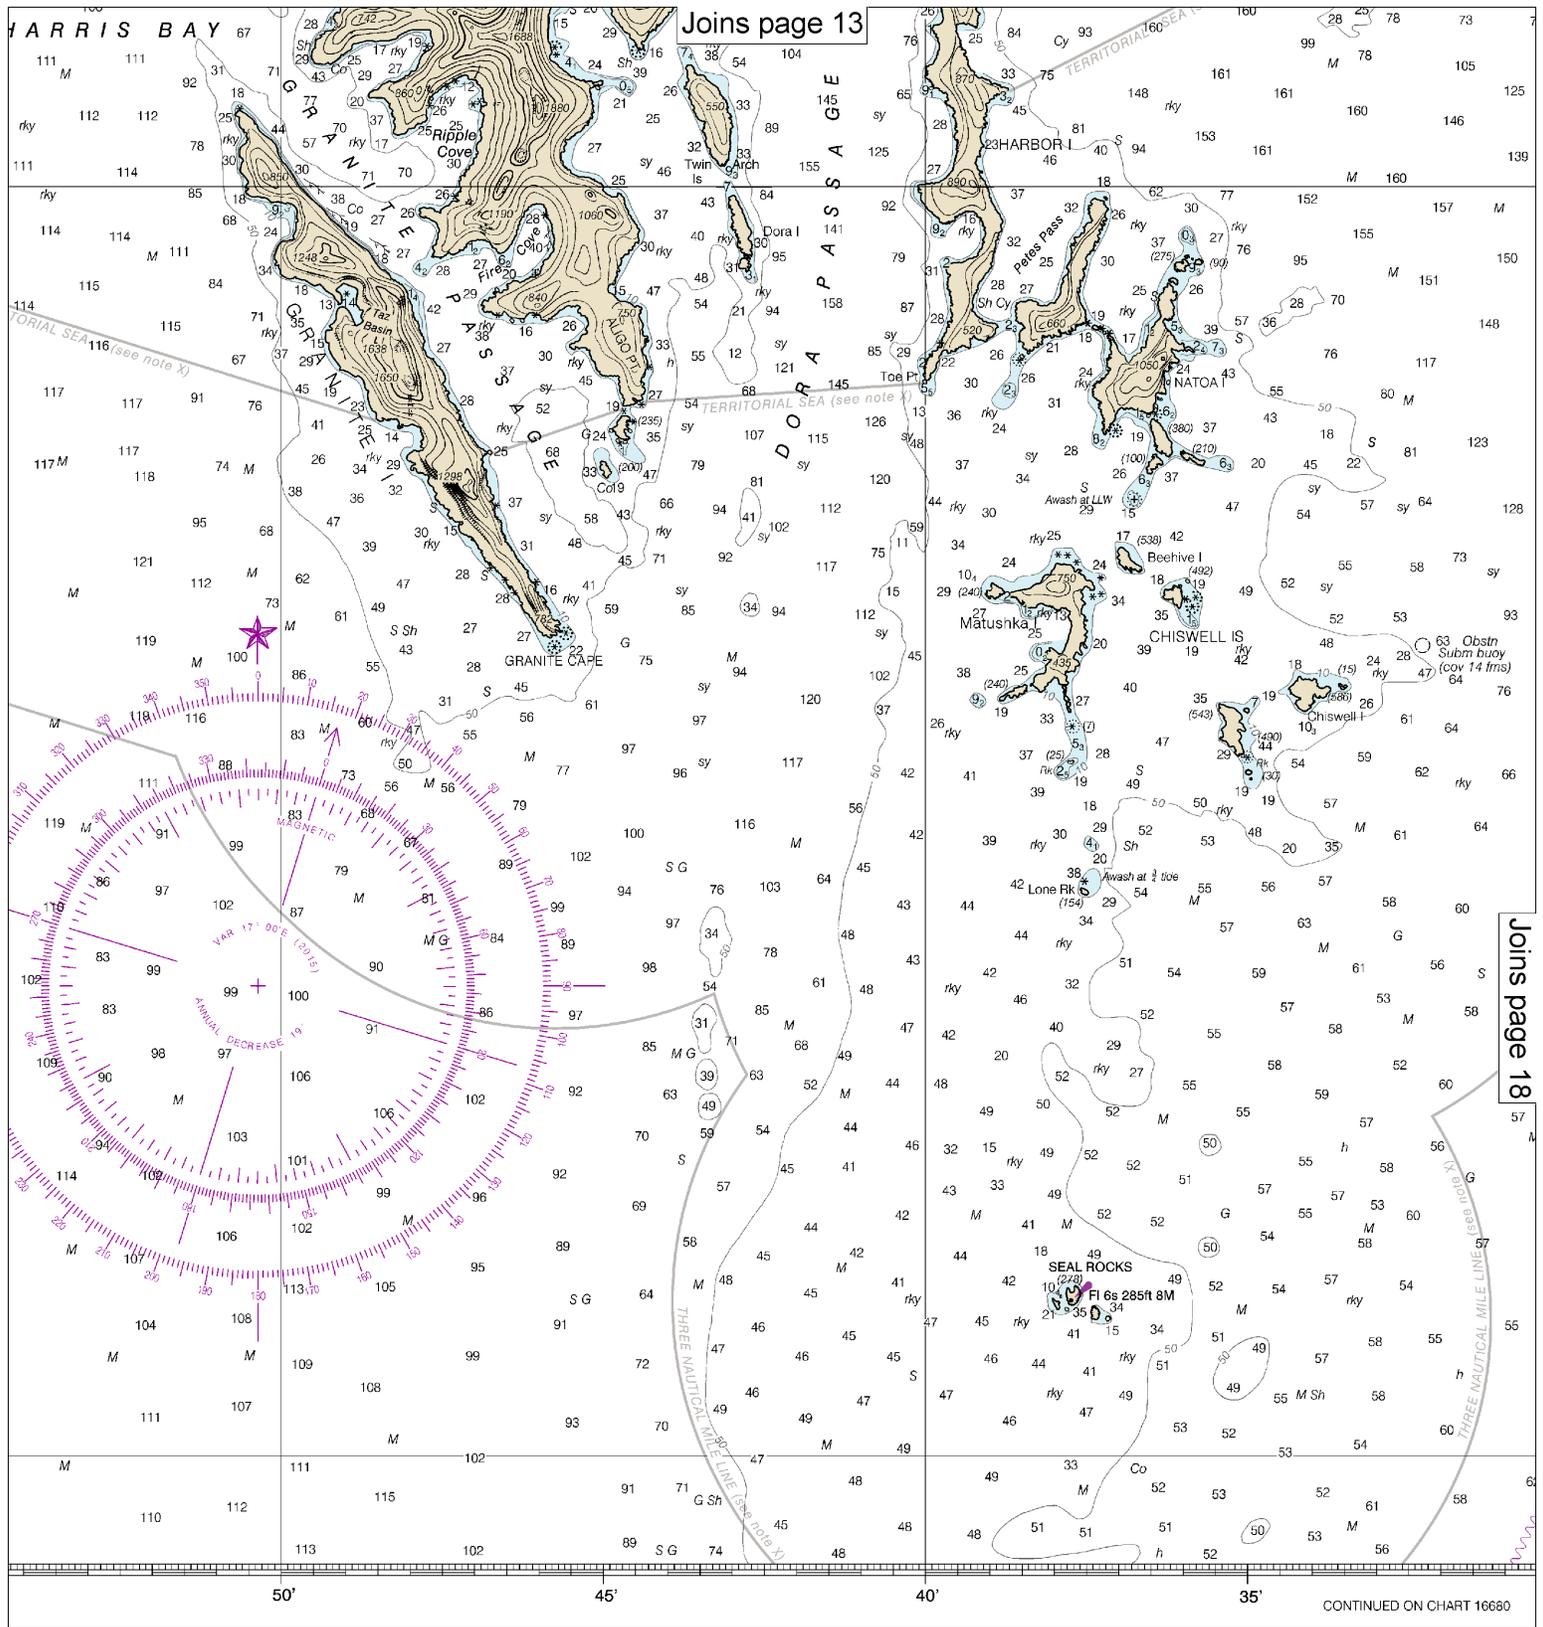


Joins page 13

Joins page 18

11 FATHOMS
 TO 11 FATHOMS)

Published at Washington, D.C.
 U.S. DEPARTMENT OF COMMERCE
 NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
 NATIONAL OCEAN SERVICE
 COAST SURVEY

FATHOMS	1	2	3	4	5	6	7	8	9	10	11	12
FEET	6	12	18	24	30	36	42	48	54	60	66	72
METERS	1	2	3	4	5	6	7	8	9	10	11	12

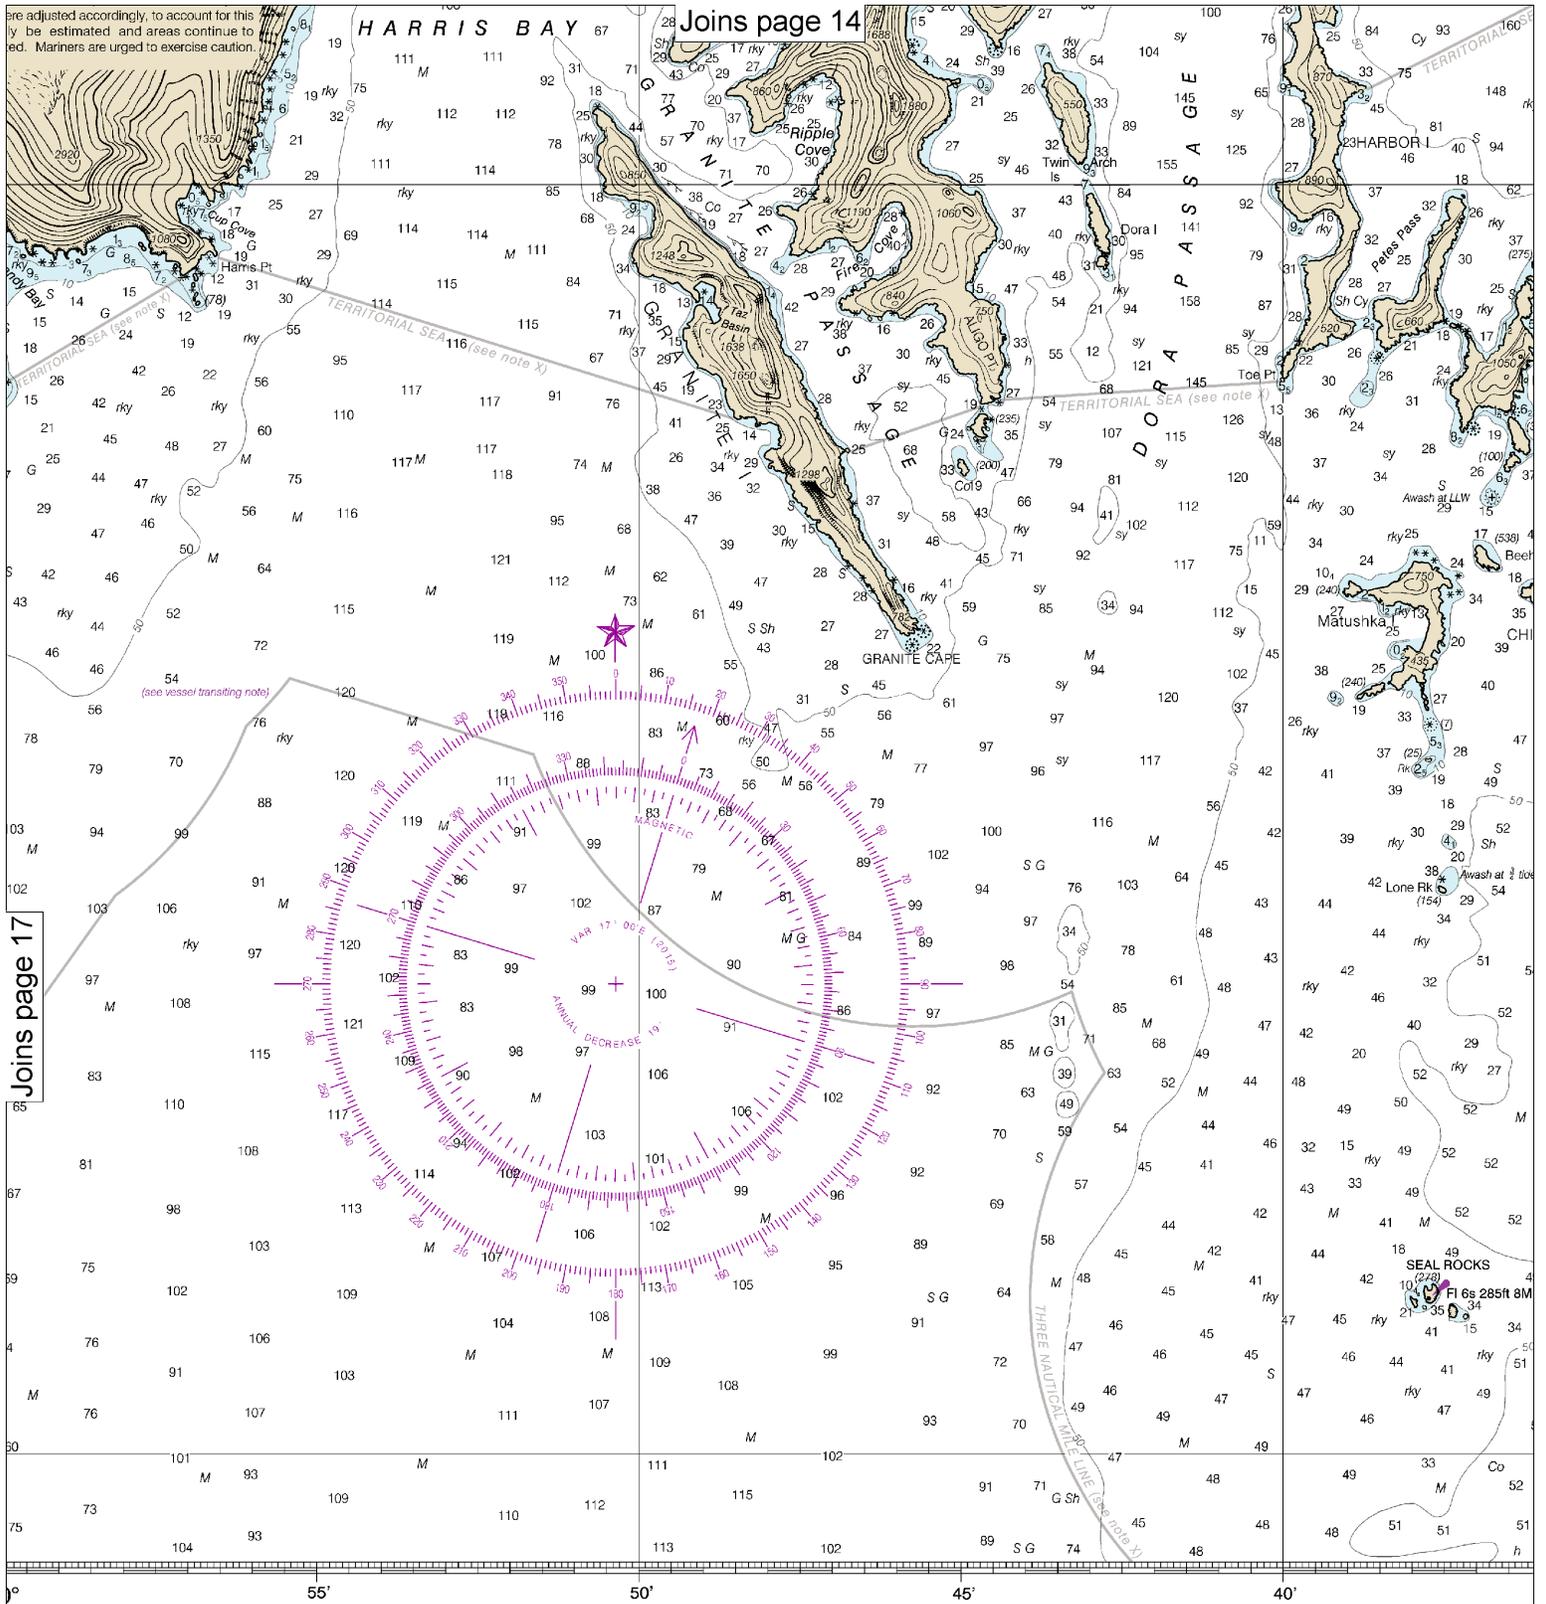

Joins page 17

Joins page 14

SOUNDINGS IN FATHOMS


(FATHOMS AND FEET TO 11 FATHOMS)

Published at Washington, D.C.
 U.S. DEPARTMENT OF COMMERCE
 NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
 NATIONAL OCEAN SERVICE
 COAST SURVEY

FATHOMS	↓
FEET	↓
METERS	↓

18

Note: Chart grid lines are aligned with true north.

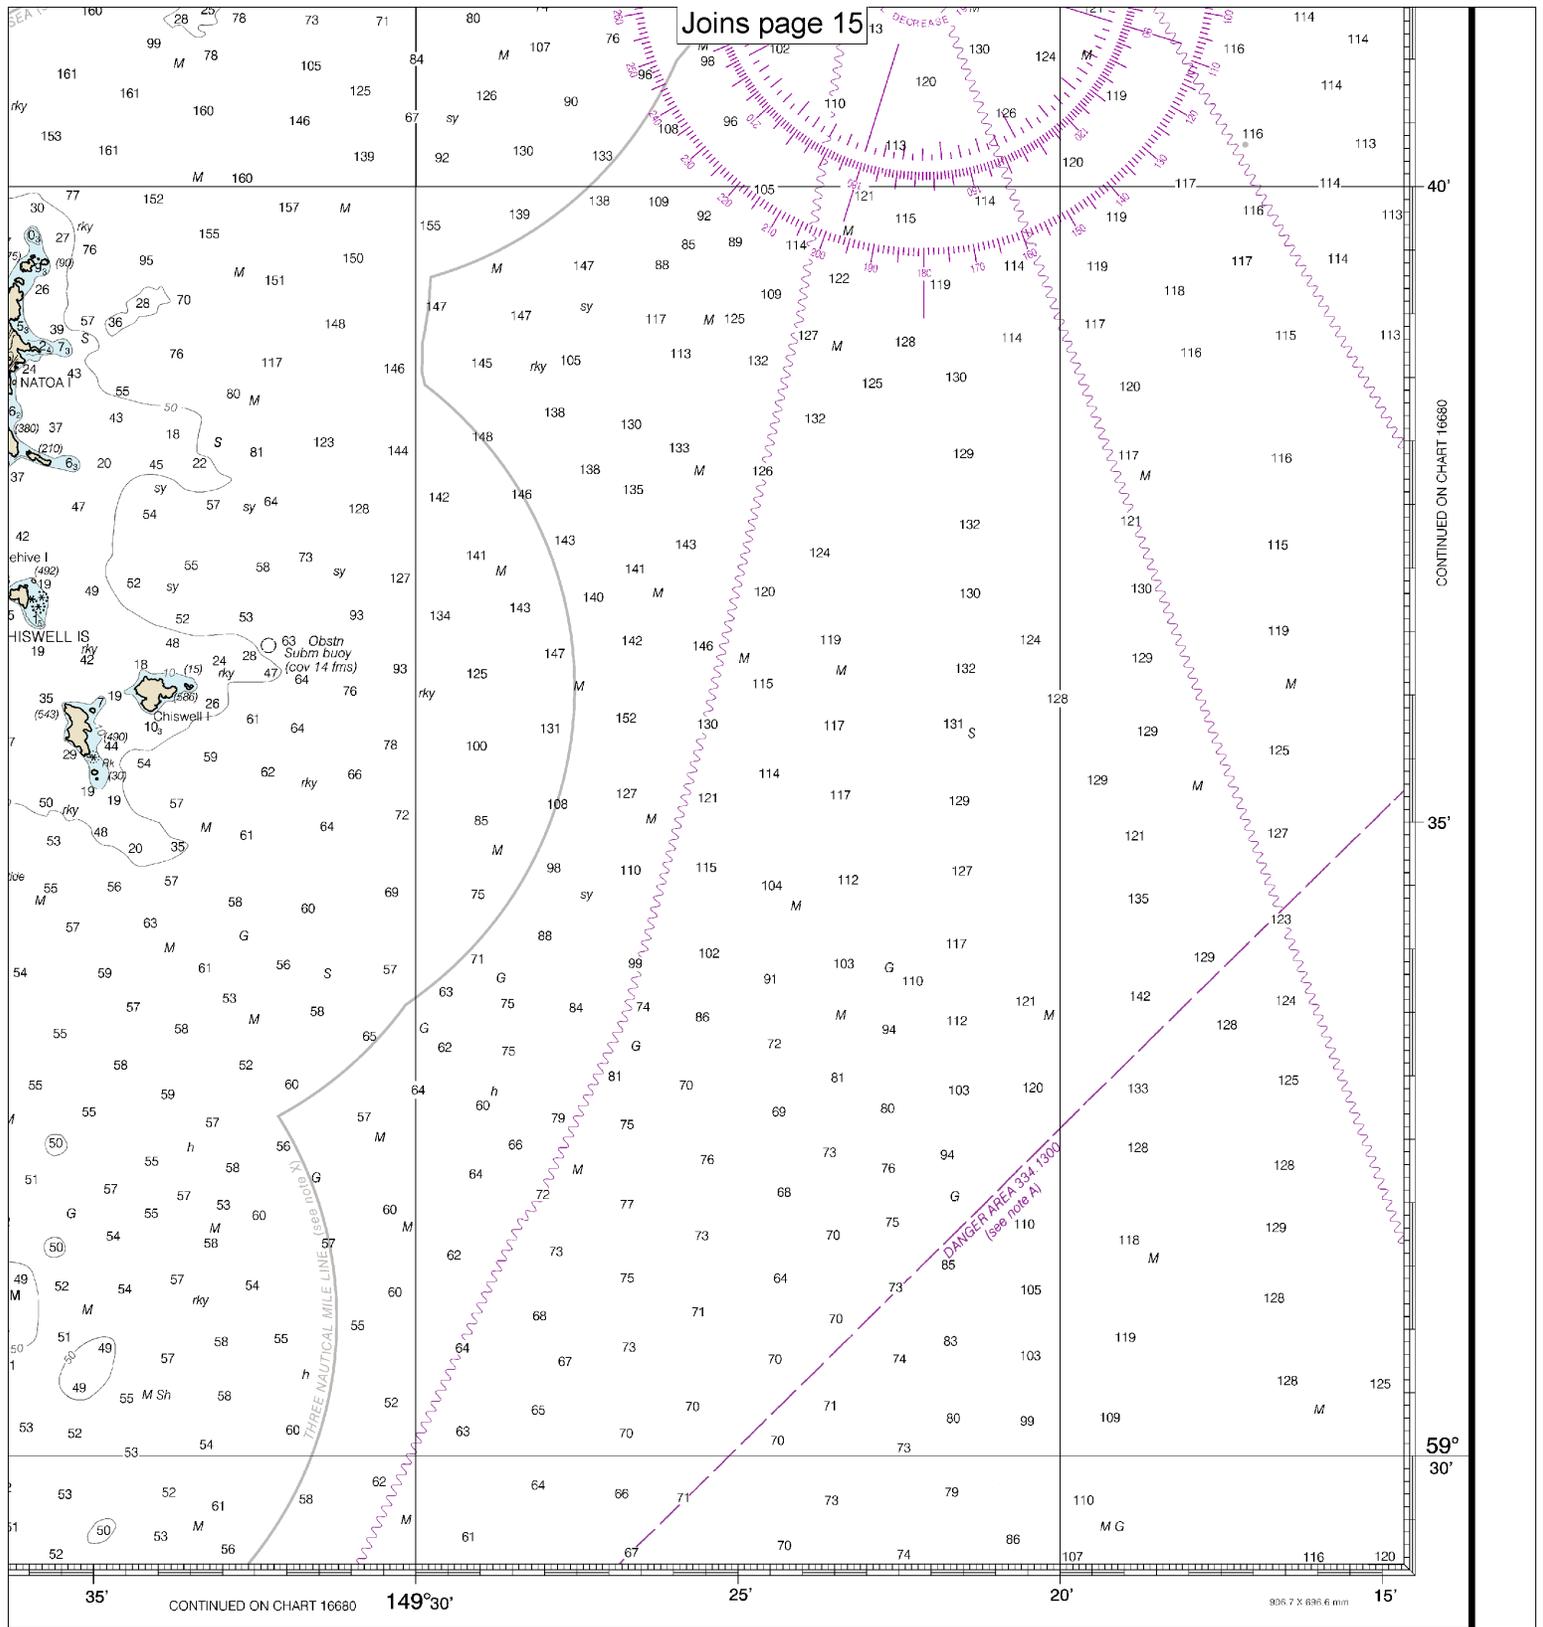

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17

Cape Resurrection to Two Arm Bay

SOUNDINGS IN FATHOMS - SCALE 1:81,847

16682



EMERGENCY INFORMATION

VHF Marine Radio channels for use on the waterways:

Channel 6 – Inter-ship safety communications.

Channel 9 – Communications between boats and ship-to-coast.

Channel 13 – Navigation purposes at bridges, locks, and harbors.

Channel 16 – Emergency, distress and safety calls to Coast Guard and others, and to initiate calls to other vessels. Contact the other vessel, agree to another channel, and then switch.

Channel 22A – Calls between the Coast Guard and the public. Severe weather warnings, hazards to navigation and safety warnings are broadcast here.

Channels 68, 69, 71, 72 and 78A – Recreational boat channels.

Getting and Giving Help — Signal other boaters using visual distress signals (flares, orange flag, lights, arm signals); whistles; horns; and on your VHF radio. You are required by law to help boaters in trouble. Respond to distress signals, but do not endanger yourself.

Distress Call Procedures

- Make sure radio is on.
- Select Channel 16.
- Press/Hold the transmit button.
- Clearly say: "MAYDAY, MAYDAY, MAYDAY."
- Also give: Vessel Name and/or Description; Position and/or Location; Nature of Emergency; Number of People on Board.
- Release transmit button.
- Wait for 10 seconds — If no response Repeat MAYDAY call.

HAVE ALL PERSONS PUT ON LIFE JACKETS!



NOAA Weather Radio All Hazards (NWR) is a nationwide network of radio stations broadcasting continuous weather information directly from the nearest National Weather Service office. NWR broadcasts official Weather Service warnings, watches, forecasts and other hazard information 24 hours a day, 7 days a week.

<http://www.nws.noaa.gov/nwr/>

Quick References

- Nautical chart related products and information — <http://www.nauticalcharts.noaa.gov>
- Interactive chart catalog — <http://www.charts.noaa.gov/InteractiveCatalog/nrnc.shtml>
- Report a chart discrepancy — <http://ocsddata.ncd.noaa.gov/idrs/discrepancy.aspx>
- Chart and chart related inquiries and comments — <http://ocsddata.ncd.noaa.gov/idrs/inquiry.aspx?frompage=ContactUs>
- Chart updates (LNM and NM corrections) — http://www.nauticalcharts.noaa.gov/mcd/updates/LNM_NM.html
- Coast Pilot online — <http://www.nauticalcharts.noaa.gov/nsd/cpdownload.htm>
- Tides and Currents — <http://tidesandcurrents.noaa.gov>
- Marine Forecasts — <http://www.nws.noaa.gov/om/marine/home.htm>
- National Data Buoy Center — <http://www.ndbc.noaa.gov/>
- NowCoast web portal for coastal conditions — <http://www.nowcoast.noaa.gov/>
- National Weather Service — <http://www.weather.gov/>
- National Hurricane Center — <http://www.nhc.noaa.gov/>
- Pacific Tsunami Warning Center — <http://ptwc.weather.gov/>
- Contact Us — <http://www.nauticalcharts.noaa.gov/staff/contact.htm>



— For the latest news from Coast Survey, follow @NOAAcharts



This Booklet chart has been designed for duplex printing (printed on front and back of one sheet). If a duplex option is not available on your printer, you may print each sheet and arrange them back-to-back to allow for the proper layout when viewing.