

THE NATIONAL CHARTMAKER SINCE 1807

UNITED STATES
NEW YORK STATE CANAL SYSTEM
NEW YORK

ONEIDA LAKE
LOCK 22 TO LOCK 23

Polyconic Projection
Scale 1:40,000

North American Datum of 1983
(World Geodetic System 1984)

SOUNDINGS IN FEET

Additional information can be obtained at nauticalcharts.noaa.gov

CAUTION
Improved channels shown by broken lines are subject to shoaling, particularly at the edges.

NOAA WEATHER RADIO BROADCASTS
The NOAA Weather Radio station listed below provides continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be as much as 100 nautical miles for stations at high elevations.
Syracuse, NY WXL 31 162.550 MHz (Chan WX-1)

RADAR REFLECTORS
Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

POLLUTION REPORTS
Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (not free) or to the nearest U.S. Coast Guard facility. Telephone communication is impossible. (33 CFR 153)

WARNING
The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

CAUTION
Due to periodic high water conditions some features charted as "visible at Normal Pool Level" may be submerged, particularly in the near shore areas. Mariners should proceed with caution.

SUPPLEMENTAL INFORMATION
Consult U.S. Coast Pilot 6 for important supplemental information.

HORIZONTAL DATUM
The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83) and for charting purposes is considered equivalent to the World Geodetic System of 1984 (WGS 84). Geographic positions referred to the North American Datum of 1983 must be corrected an average of 6.000' northward and 1.272' eastward to agree with this chart.

Ⓢ Pump-out Facilities

NOTES

PLANE OF REFERENCE OF THIS CHART: Normal Pool Level.


AVAILABLE DEPTH: The New York State Canal System is maintained to provide a minimum width of 200 feet in the canalized river and lake sections, a minimum width of 75 feet in the land line sections, and a minimum depth of 12 feet at ordinary water stage.

VERTICAL CLEARANCE: Minimum vertical clearance at Maximum Navigable Pool Level under bridges and gates along the Erie Canal east of Three River Point is 20 feet.

SYMBOLS AND ABBREVIATIONS: For complete list of symbols and abbreviations see Chart No. 1.

AUTHORITIES: Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, Geological Survey, U.S. Coast Guard and New York State Thruway Authority.

Aids to navigation on the New York State Canal System are the responsibility of the New York State Thruway Authority. All lighted aids, stationary and floating, unless otherwise indicated display a 1 second flash every 4 seconds.

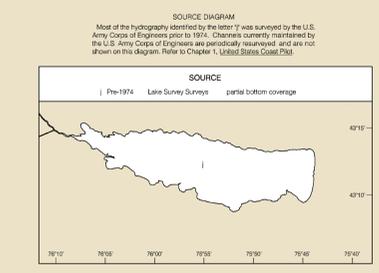

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
FEET																																																	
METERS																																																	