This nautical chart has been designed to promote safe navigation. The National Ocean Service encourages users to submit corrections, additions, or comments for improving this chart to the Chief, Marine Chart Division (N/CS2), National Ocean Service, NOAA, Silver Spring, Maryland 20910-3282.

Formerly LS 51, 1st Ed., June 1909 KAPP 1313

SOUNDINGS IN FEET

Nautical Chart Catalog No 4 Panels C, D

14862

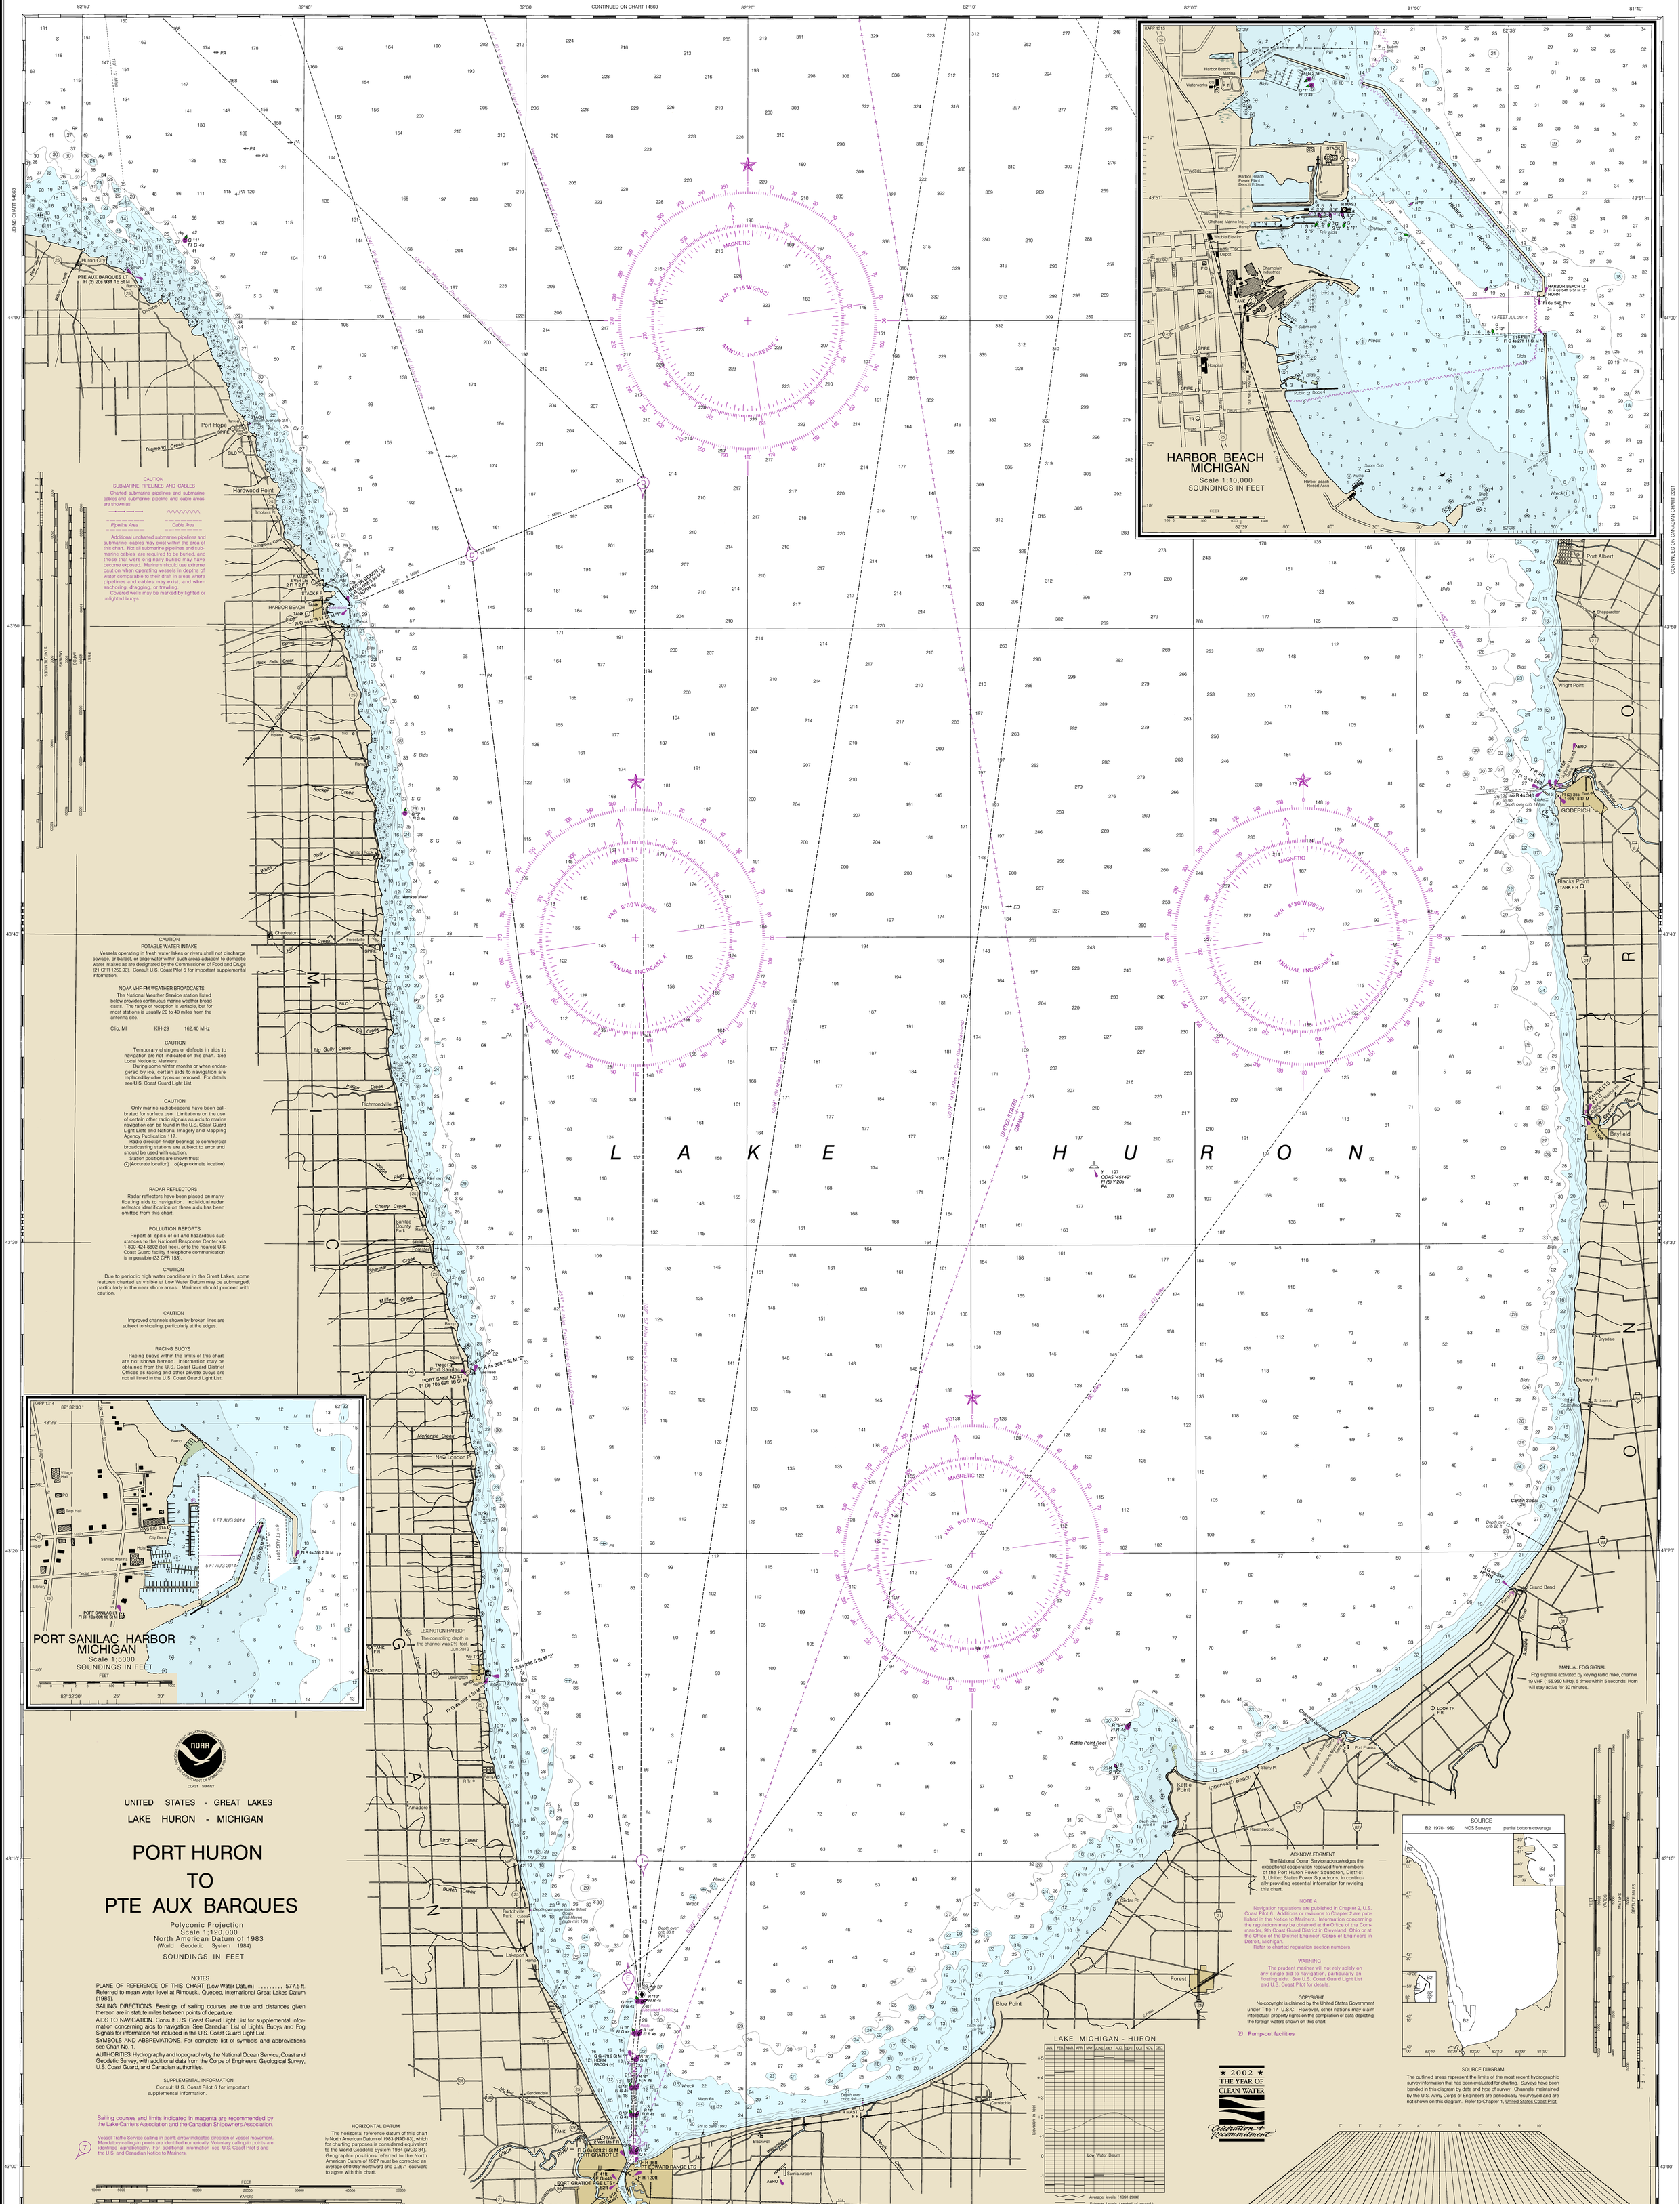

NOTES

PLANE OF REFERENCE OF THIS CHART (Low Water Datum) ..... 577.5 ft. Referred to mean water level at Rimouski, Quebec, International Great Lakes Datum (1985).

SAILING DIRECTIONS. Bearings of sailing courses are true and distances given thereon are in statute miles between points of departure.

AIDS TO NAVIGATION. Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation. See Canadian List of Lights, Buoys and Fog Signals for information not included in the U.S. Coast Guard Light List.

SYMBOLS AND ABBREVIATIONS. For complete list of symbols and abbreviations see Chart No. 1.

AUTHORITIES. Hydrography and topography by the National Ocean Service, Coast and Geodetic Survey, with additional data from the Corps of Engineers, Geological Survey, U.S. Coast Guard, and Canadian authorities.

SUPPLEMENTAL INFORMATION
Consult U.S. Coast Pilot 6 for important supplemental information.

Sailing courses and limits indicated in magenta are recommended by the Lake Carriers Association and the Canadian Shipowners Association.

Vessel Traffic Service calling-in point; arrow indicates direction of vessel movement. Mandatory calling-in points are identified numerically. Voluntary calling-in points are identified alphabetically. For additional information see U.S. Coast Pilot 6 and the U.S. and Canadian Notice to Mariners.

HORIZONTAL DATUM
The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83), which for charting purposes is considered equivalent to the World Geodetic System 1984 (WGS 84). Geographic positions referred to the North American Datum of 1927 must be corrected an average of 0.085" northward and 0.267" eastward to agree with this chart.

FEET
YARDS
METERS
STATUTE MILES

ACKNOWLEDGMENT
The National Ocean Service acknowledges the exceptional cooperation received from members of the Port Huron Power Squadron, District 9, United States Power Squadrons, in continually providing essential information for revising this chart.

NOTE A
Navigation regulations are published in Chapter 2, U.S. Coast Pilot 6. Additions or revisions to Chapter 2 are published in the Notice to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 9th Coast Guard District in Cleveland, Ohio or at the Office of the District Engineer, Corps of Engineers in Detroit, Michigan.
Refer to charted regulation section numbers.

WARNING
The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

COPYRIGHT
No copyright is claimed by the United States Government under Title 17 U.S.C. However, other nations may claim intellectual property rights on the compilation of data depicting the foreign waters shown on this chart.

Ⓟ Pump-out facilities

★ 2002 ★ THE YEAR OF CLEAN WATER
Celebration & Recommitment

SOURCE
B2 1970-1989 NOS Surveys partial bottom coverage

SOURCE DIAGRAM
The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U.S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, United States Coast Pilot.

MANUAL FOG SIGNAL
Fog signal is activated by keying radio mike, channel 19 VHF (156.950 MHz), 5 times within 5 seconds. Horn will stay active for 30 minutes.

CAUTION
SUBMARINE PIPELINES AND CABLES
Charted submarine pipelines and submarine cables and submarine pipeline and cable areas are shown as:
Pipeline Area — Cable Area
Additional uncharted submarine pipelines and submarine cables may exist within the area of this chart. Not all submarine pipelines and submarine cables are required to be buried, and those that were originally buried may have become exposed. Mariners should use extreme caution when operating vessels in depths of water comparable to their draft in areas where pipelines and cables may exist, and when anchoring, dragging, or trawling.
Covered wells may be marked by lighted or unlighted buoys.

CAUTION
POTABLE WATER INTAKE
Vessels operating in fresh water lakes or rivers shall not discharge sewage, or ballast, or bilge water within such areas adjacent to domestic water intakes as are designated by the Commissioner of Food and Drugs (21 CFR 1250.93). Consult U.S. Coast Pilot 6 for important supplemental information.

NOAA VHF-FM WEATHER BROADCASTS
The National Weather Service station listed below provides continuous marine weather broadcasts. The range of reception is variable, but for most stations is usually 20 to 40 miles from the antenna site.

Clio, MI	KIH-29	162.40 MHz

CAUTION
Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.
During some winter months or when endangered by ice, certain aids to navigation are replaced by other types or removed. For details see U.S. Coast Guard Light List.

CAUTION
Only marine radiobeacons have been calibrated for surface use. Limitations on the use of certain other radio signals as aids to marine navigation can be found in the U.S. Coast Guard Light Lists and National Imagery and Mapping Agency Publication 117.
Radio direction-finder bearings to commercial broadcasting stations are subject to error and should be used with caution.
Station positions are shown thus:
⊙(Accurate location) ○(Approximate location)

RADAR REFLECTORS
Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

POLLUTION REPORTS
Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

CAUTION
Due to periodic high water conditions in the Great Lakes, some features charted as visible at Low Water Datum may be submerged, particularly in the near shore areas. Mariners should proceed with caution.

CAUTION
Improved channels shown by broken lines are subject to shoaling, particularly at the edges.

RACING BUOYS
Racing buoys within the limits of this chart are not shown hereon. Information may be obtained from the U.S. Coast Guard District Offices as racing and other private buoys are not all listed in the U.S. Coast Guard Light List.

28th Ed., Apr. 13/ 02
14862
Last Correction: 8/28/2015. Cleared through:
LNM: 3715 (9/15/2015), NM: 3915 (9/26/2015), CHS: 0815 (8/28/2015)

To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters).
If the line does not measure six inches (152 millimeters), this copy is not certified safe for navigation.

SOUNDINGS IN FEET

Published at Washington, D.C.
U.S. DEPARTMENT OF COMMERCE
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
NATIONAL OCEAN SERVICE
COAST SURVEY

This chart was distributed as a PDF (Portable Document Format). Printing PDFs may alter the chart scale, color, or legibility that may impact suitability for navigation. Printed charts provided by NOAA certified Print on Demand (POD) providers fulfill a vessel's requirement to carry a navigational chart "published by the National Ocean Service" in accordance with federal regulations, including but not limited to 33 C.F.R. 164.33(a), 33 C.F.R. 164.72(b), and 46 C.F.R. 28.225(a). POD charts meet stringent print standards and can be recognized by an official certification of authenticity printed on the chart. A list of POD providers can be found at: nauticalcharts.noaa.gov/pod

FATHOMS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
FEET	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102
METERS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
	18	19	20	21	22	23	24	25	26	27	28	29	30	31			

Port Huron to Pte. Aux Barques
SOUNDINGS IN FEET - SCALE 1:120,000

14862

NSN 7642014010583
NOAA STOCK NO. 14XCO14862