NOAA encourages users to submit inquiries, discrepancies or comments about this chart at http://www.nauticalcharts.noaa.gov/staff/contact.htm.

Formerly LS 94. 1st Ed., May 1907 KAPP 1506

SOUNDINGS IN FEET

14964

THE NATION'S CHARTMAKER SINCE 1807

UNITED STATES - GREAT LAKES

LAKE SUPERIOR-MICHIGAN

BIG BAY POINT TO REDRIDGE

Polyconic Projection
Scale 1:120,000
North American Datum of 1983
(World Geodetic System 1984)
SOUNDINGS IN FEET

Additional information can be obtained at nauticalcharts.noaa.gov.

NOTES

PLANE OF REFERENCE OF THIS CHART (Low Water Datum) . . . . . 601.1 ft. Referred to mean water level at Rimouski, Quebec, International Great Lakes Datum (1985).

SAILING DIRECTIONS. Bearings of sailing courses are true and distances given thereon are in statute miles between points of departure.

AIDS TO NAVIGATION. Consult U. S. Coast Guard Light List for supplemental information concerning aids to navigation.

SYMBOLS AND ABBREVIATIONS. For complete list of symbols and abbreviations see Chart No. 1.

BRIDGE AND OVERHEAD CABLE CLEARANCES. When the water surface is above Low Water Datum, bridge and overhead clearances are reduced correspondingly. For clearances see U.S. Coast Pilot 6.

AUTHORITIES. Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, Geological Survey, and U. S. Coast Guard.

CAUTION

Due to periodic high water conditions in the Great Lakes, some features charted as visible at Low Water Datum may be submerged, particularly in the near shore areas. Mariners should proceed with caution.

SUPPLEMENTAL INFORMATION

Consult U.S. Coast Pilot 6 for important supplemental information.

CAUTION

POTABLE WATER INTAKE (PWI)

Vessels operating in fresh water lakes or rivers shall not discharge sewage, or ballast, or bilge water within such areas adjacent to domestic water intakes as are designated by the Commissioner of Food and Drugs (21 CFR 1250.93). Consult U. S. Coast Pilot 6 for important supplemental information.

Sailing courses and limits indicated in magenta are recommended by the Lake Carriers Association and the Canadian Shipowners Association.

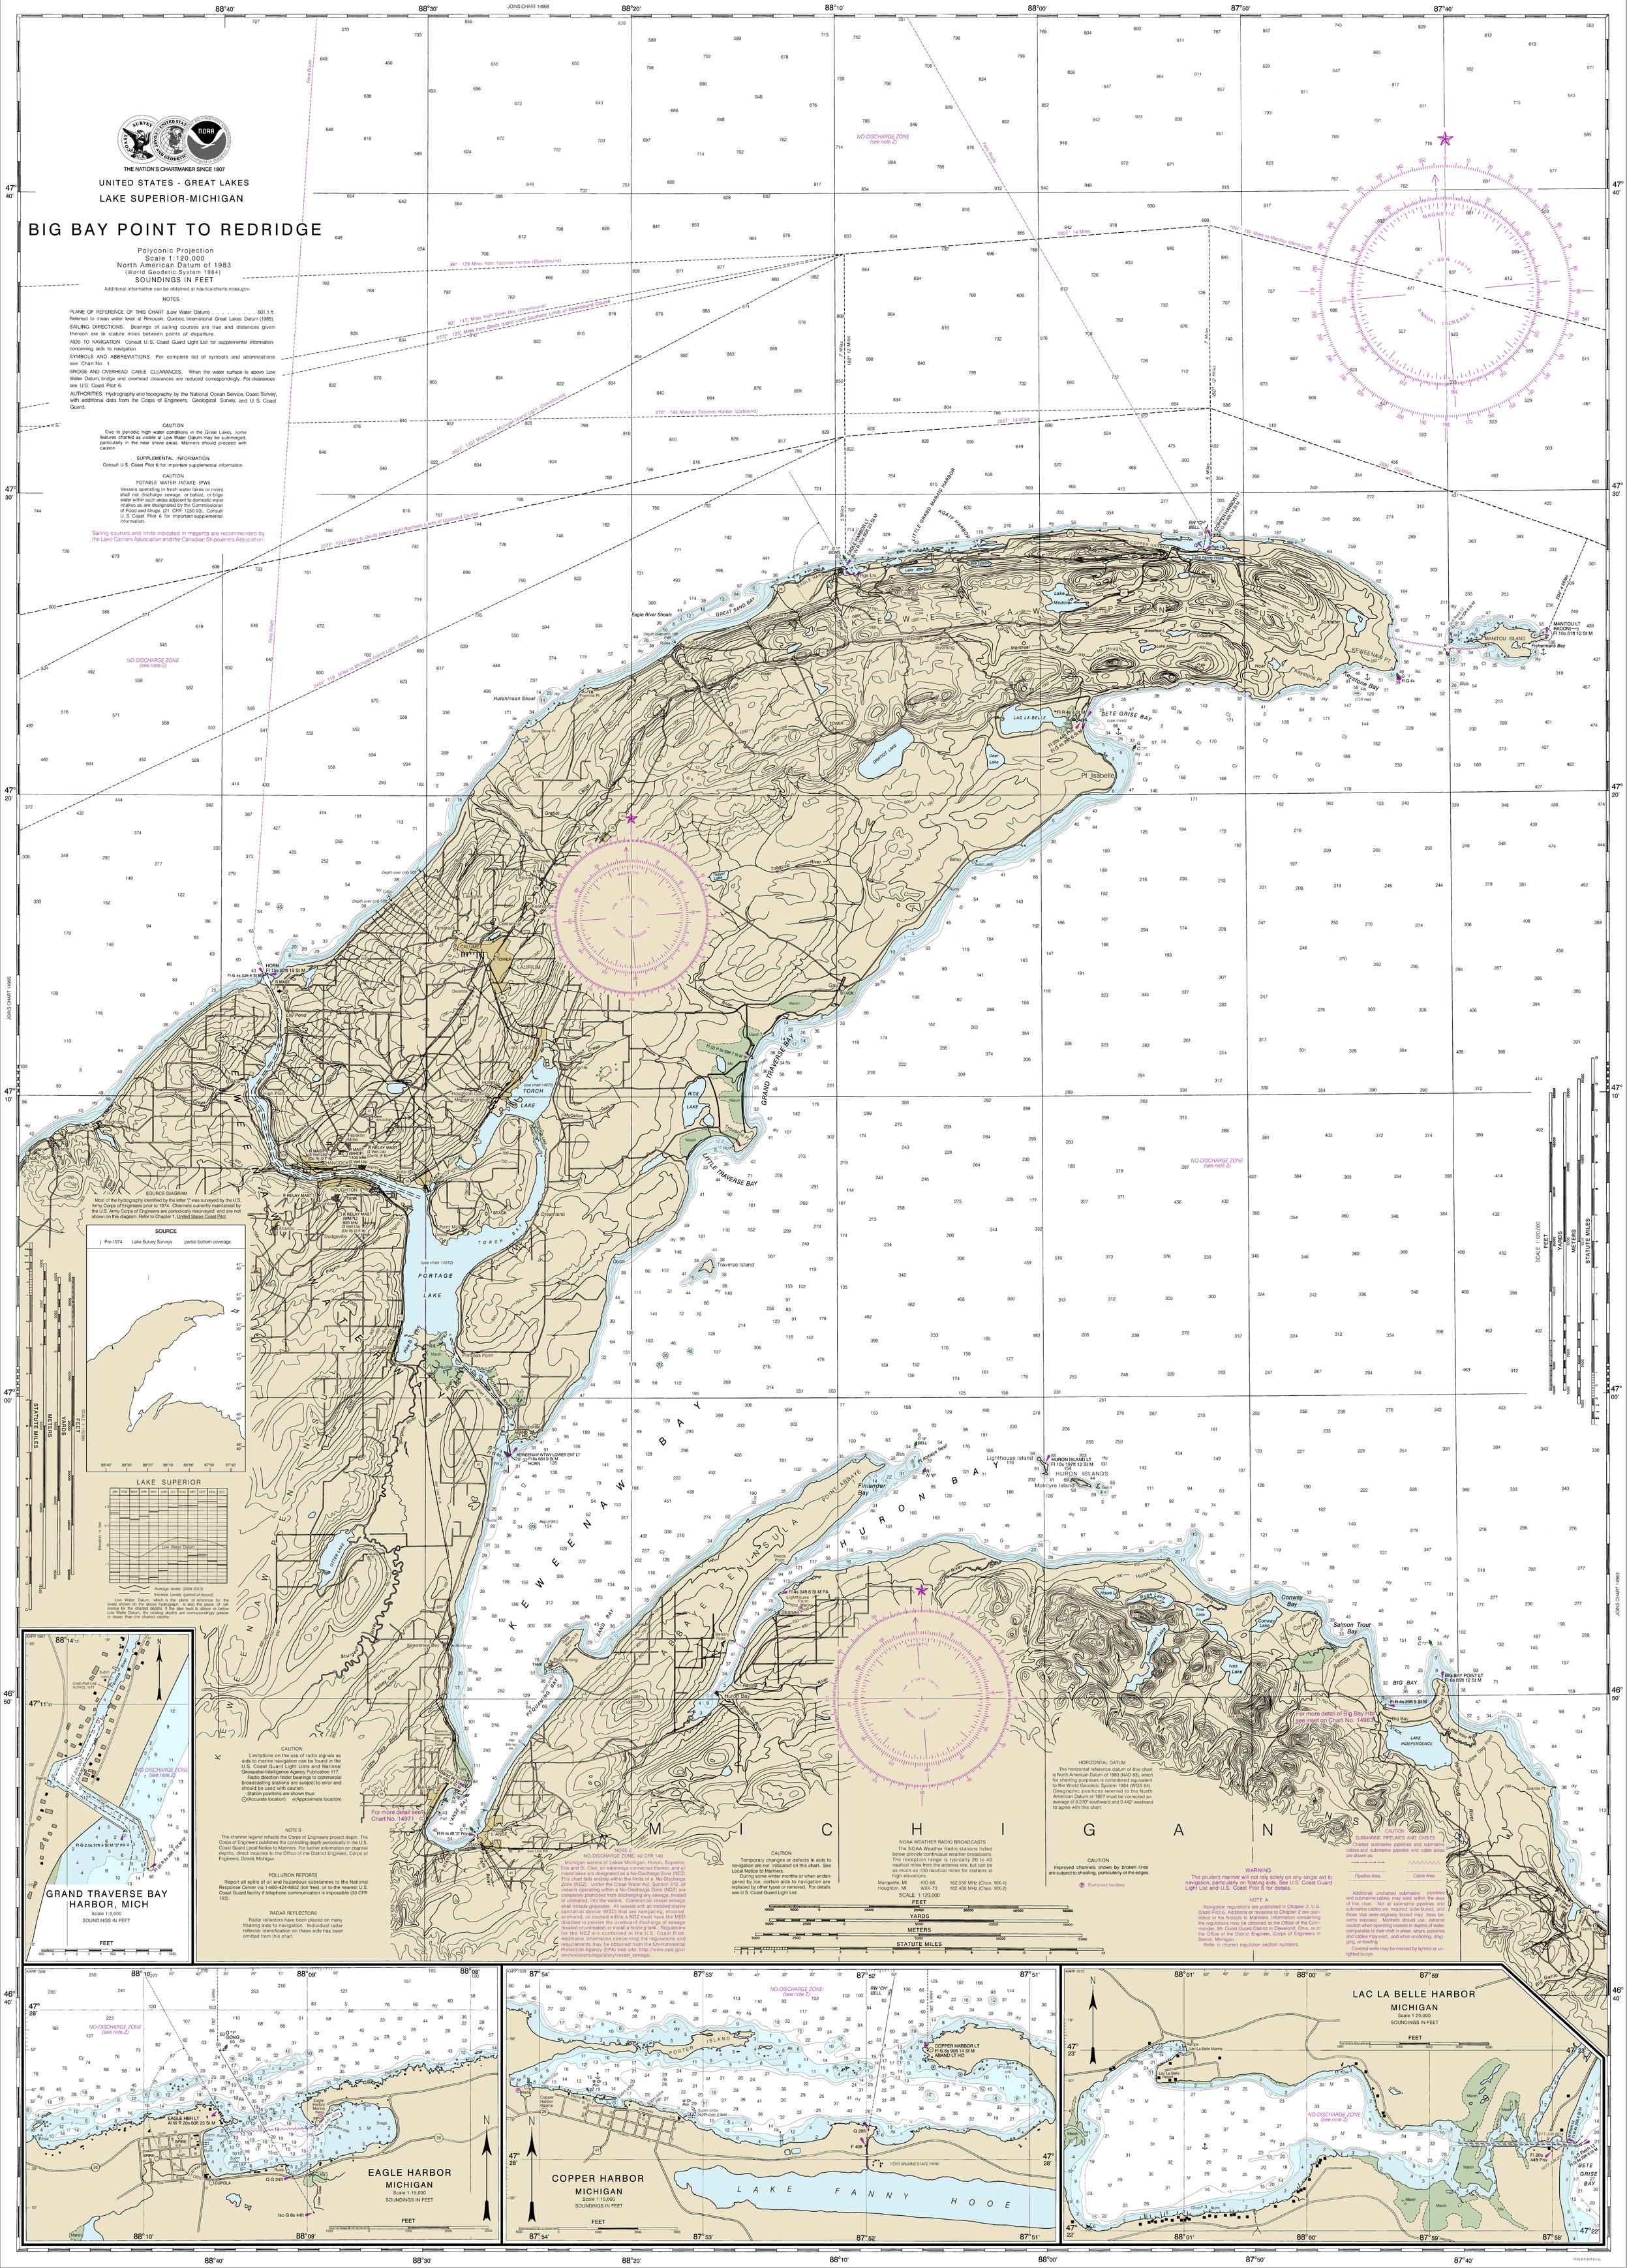

22nd Ed., Oct. 2014

14964

Last Correction: 10/15/2014. Cleared through:
LNM: 3715 (9/15/2015), NM: 3915 (9/26/2015), CHS: 0815 (8/28/2015)

To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters).

If the line does not measure six inches (152 millimeters), this copy is not certified safe for navigation.

CAUTION

This chart has been corrected from the Notice to Mariners (NM) published weekly by the National Geospatial-Intelligence Agency and the Local Notice to Mariners (LNM) issued periodically by each U.S. Coast Guard district to the dates shown in the lower left hand corner. Chart updates corrected from Notice to Mariners published after the dates shown in the lower left hand corner are available at nauticalcharts.noaa.gov.

SOUNDINGS IN FEET

Published at Washington, D.C.
U.S. DEPARTMENT OF COMMERCE
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
NATIONAL OCEAN SERVICE
COAST SURVEY

FATHOMS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
FEET	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102
METERS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
	18	19	20	21	22	23	24	25	26	27	28	29	30	31			

This chart was distributed as a PDF (Portable Document Format). Printing PDFs may alter the chart scale, color, or legibility that may impact suitability for navigation. Printed charts provided by NOAA certified Print on Demand (POD) providers fulfill a vessel's requirement to carry a navigational chart "published by the National Ocean Service" in accordance with federal regulations, including but not limited to 33 C.F.R. 164.33(a), 33 C.F.R. 164.72(b), and 46 C.F.R. 28.225(a). POD charts meet stringent print standards and can be recognized by an official certification of authenticity printed on the chart. A list of POD providers can be found at: nauticalcharts.noaa.gov/pod

Big Bay Point to Redridge

SOUNDINGS IN FEET - SCALE 1:120,000

14964