NOAA encourages users to submit inquiries, discrepancies or comments about this chart at http://www.nauticalcharts.noaa.gov/staff/contact.htm.

Formerly C & GS 9007, 1st Ed., Apr. 1884 KAPP 2522

SOUNDINGS IN FATHOMS

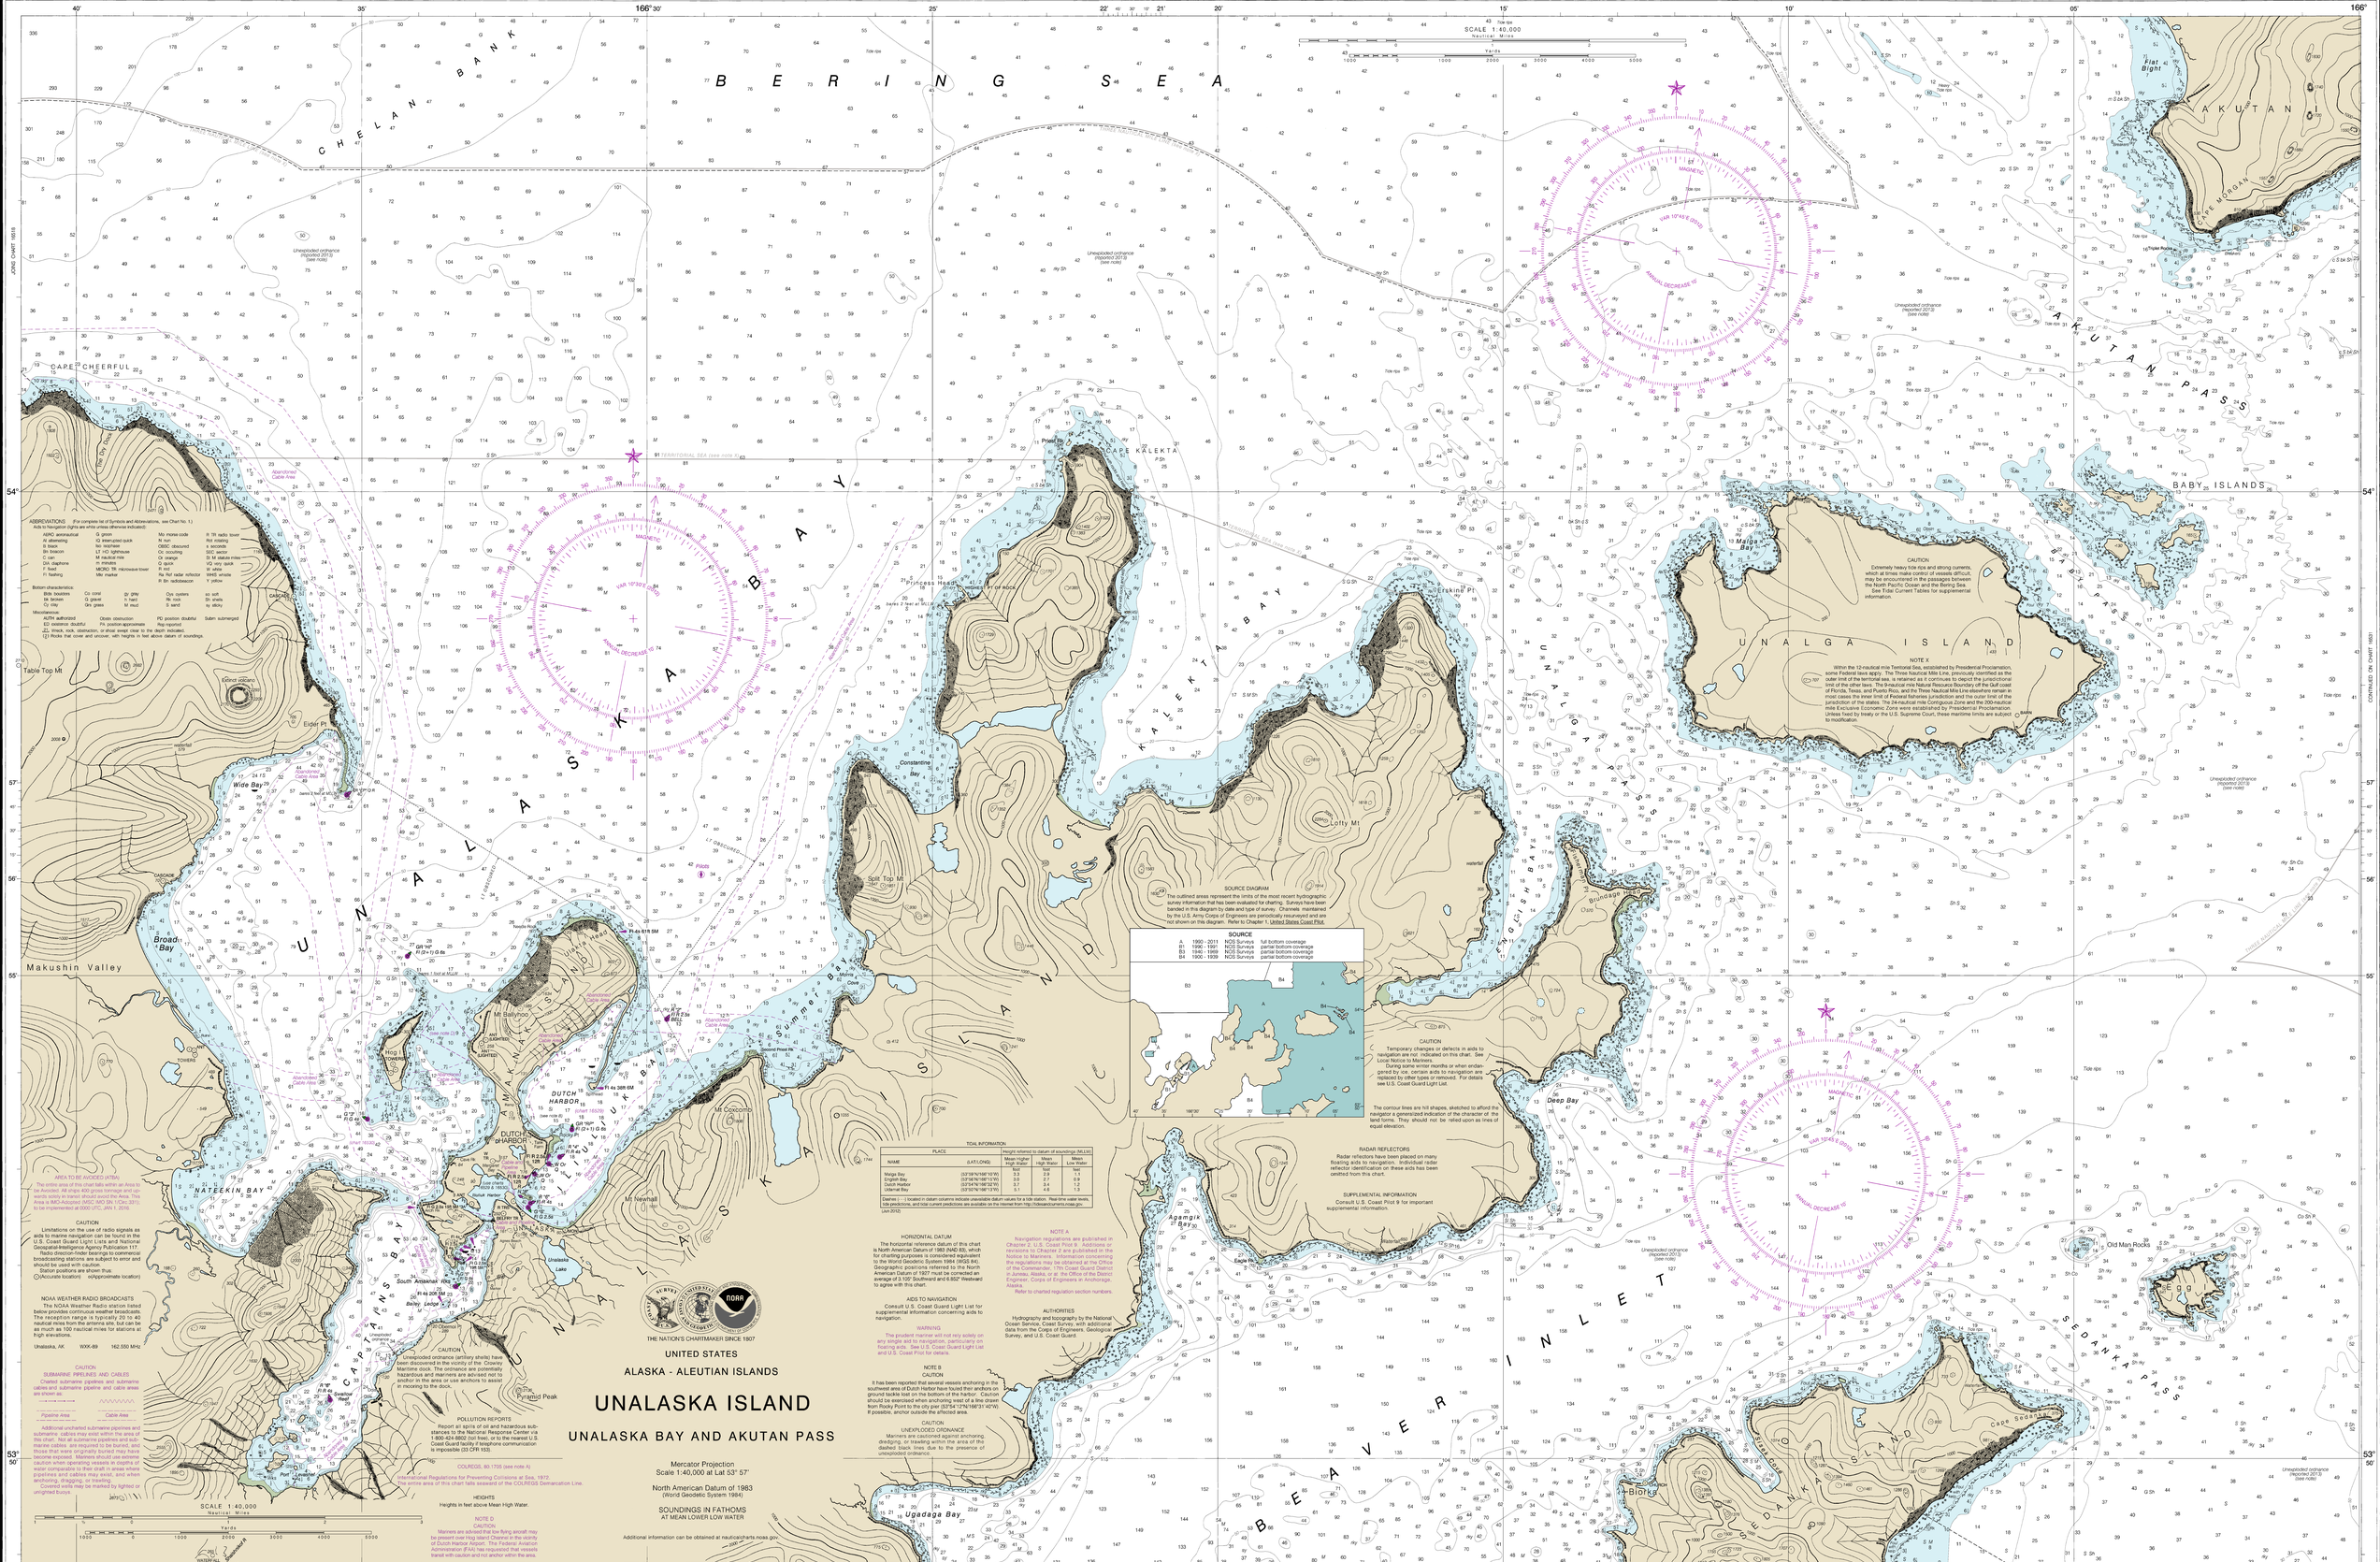


ABBREVIATIONS (For complete list of Symbols and Abbreviations, see Chart No. 1.)
Aids to Navigation (lights are white unless otherwise indicated)

AERO aeronautical
Al alternating
B beacon
Bn beacon
C can
DA daymark
F fixed
Fl flashing
G green
Gl alternating-quick
Ho lighthouse
LT HO lighthouse
M nautical mile
m minutes
MICRO TR microwave tower
Mkr marker
Mo morse-code
Mr iron
OBSC obscured
Oc occulting
Or orange
Q quick
R red
Ra Ref radar reflector
R Bn radiobeacon
R TR radio tower
Rot rotating
s seconds
SEC sector
St M statute miles
VQ very quick
W white
Y yellow

Bottom characteristics:
Blds boulders
Cl clay
Cy clay
Co coral
G gravel
Gn green
Gr gray
M mud
Or orange
Ors oysters
Sh shells
S sand
Sn snail
so soft
St shells
sy silt/clay

Miscellaneous:
AUTH authorized
ED existence doubtful
Obstn obstruction
Pa position approximate
PD position doubtful
Rep reported
Subm submerged
Wk wreck, rock, obstruction, or shoal swept clear to the depth indicated.
(2) Rocks that cover and uncover, with heights in feet above datum of soundings.

AREA TO BE AVOIDED (ATBA)
The entire area of this chart falls within an Area to be Avoided. All ships 400 gross tonnage and upwards solely in transit should avoid the Area. This Area is IMO-Adopted (MSC/ MO SN.1/Circ.371), to be implemented at 0000 UTC, JAN 1, 2016.

CAUTION
Limitations on the use of radio signals as aids to marine navigation can be found in the U.S. Coast Guard Light Lists and National Geospatial-Intelligence Agency Publication 117.
Radio direction-finder bearings to commercial broadcasting stations are subject to error and should be used with caution.
Station positions are shown thus:
◎(Accurate location) ○(Approximate location)

NOAA WEATHER RADIO BROADCASTS
The NOAA Weather Radio station listed below provides continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be less than 20 nautical miles for stations at high elevations.

| | | |
|---|---|---|
| Unalaska, AK | WXK-89 | 162.550 MHz |

CAUTION
SUBMARINE PIPELINES AND CABLES
Charted submarine pipelines and submarine cables and submarine pipeline and cable areas are shown as:

Pipeline Area — Cable Area

Additional uncharted submarine pipelines and submarine cables may exist within the area of this chart. Not all submarine pipelines and submarine cables are required to be buried, and those that were originally buried may have become exposed. Mariners should use extreme caution when operating vessels in depths of water comparable to their draft in areas where pipelines and cables may exist, and when anchoring, dragging, or trawling.
Covered wells may be marked by lighted or unlighted Buoys.

CAUTION
This chart has been corrected from the Notice to Mariners (NM) published weekly by the National Geospatial-Intelligence Agency and the Local Notice to Mariners (LNM) issued periodically by each U.S. Coast Guard district to the dates shown in the lower left hand corner. Chart updates corrected from Notice to Mariners published after the dates shown in the lower left hand corner are available at nauticalcharts.noaa.gov.

Last Correction: 8/12/2016. Cleared through:
LNM: 4616 (11/15/2016), NM: 4616 (11/12/2016), CHS: 1016 (10/28/2016)

To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters).
If the line does not measure six inches (152 millimeters), this copy is not certified safe for navigation.

Warning — Unofficial Product. This product is not to be used for navigation. It is provided for informational purposes only. Use at your own risk.

SOURCE DIAGRAM
The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U.S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, United States Coast Pilot.

SOURCE

| | | | |
|---|---|---|---|
| A | 1990 - 2011 | NOS Surveys | full bottom coverage |
| B1 | 1990 - 1991 | NOS Surveys | partial bottom coverage |
| B3 | 1940 - 1989 | NOS Surveys | partial bottom coverage |
| B4 | 1900 - 1939 | NOS Surveys | partial bottom coverage |

TIDAL INFORMATION
Height referred to datum of soundings (MLLW)

| PLACE NAME | LAT/LONG | Mean Higher High Water feet | Mean High Water feet | Mean Low Water feet |
|---|---|---|---|---|
| Malga Bay | 53°39'N/166°15'W | 3.8 | 3.3 | 0.8 |
| Engelk Bay | 53°34'N/166°17'W | 3.5 | 2.7 | 0.3 |
| Dutch Harbor | 53°54'N/166°32'W | 3.7 | 2.4 | 1.0 |
| Ulsenal Bay | 53°53'N/166°13'W | 5.1 | 4.0 | 1.2 |

Dashes (--) located in datum columns indicate unavailable datum values for a tide station. Real-time water levels, tide predictions, and tidal current predictions are available on the Internet from http://tidesandcurrents.noaa.gov. (Jun 2012)

HORIZONTAL DATUM
The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83), which for charting purposes is considered equivalent to the World Geodetic System 1984 (WGS 84). Geographic positions referred to the North American Datum of 1927 must be corrected an average of 3.100" Southward and 6.652" Westward to agree with this chart.

AIDS TO NAVIGATION
Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

WARNING
The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

NOTE B
CAUTION
It has been reported that several vessels anchoring in the southwest area of Dutch Harbor have fouled their anchors on ground tackle lost on the bottom of the harbor. Caution should be exercised when anchoring west of a line drawn from Rocky Point to the city pier (53°54'12"N/166°31'40"W). If possible, anchor outside the affected area.

CAUTION
UNEXPLODED ORDNANCE
Mariners are cautioned against anchoring, dredging, or trawling within the area of the dashed black lines, due to the presence of unexploded ordnance.

NOTE A
Navigation regulations are published in Chapter 2, U.S. Coast Pilot 9. Additions or revisions to Chapter 2 are published in the Notice to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 17th Coast Guard District in Juneau, Alaska, or at the Office of the District Engineer, Corps of Engineers in Anchorage, Alaska.
Refer to charted regulation section numbers.

AUTHORITIES
Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, Geological Survey, and U.S. Coast Guard.

CAUTION
Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.
During some winter months or when endangered by ice, certain aids to navigation are replaced by other types or removed. For details see U.S. Coast Guard Light List.

The contour lines are hill shapes, sketched to afford the navigator a generalized indication of the character of the land forms. They should not be relied upon as lines of equal elevation.

RADAR REFLECTORS
Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

SUPPLEMENTAL INFORMATION
Consult U.S. Coast Pilot 9 for important supplemental information.

CAUTION
Extremely heavy tide rips and strong currents, which at times make navigation and anchoring difficult, may be encountered in the passages between the North Pacific Ocean and the Bering Sea. See Tidal Current Tables for supplemental information.

NOTE X
Within the 12-nautical mile Territorial Sea, established by Presidential Proclamation, some Federal laws apply. The Three Nautical Mile Line, previously identified as the outer limit of the territorial sea, is retained as it continues to depict the jurisdictional limit of the other laws. The 9-nautical mile Natural Resource Boundary of the Gulf coast of Florida is retained as it depicts the limit of Federal fisheries jurisdiction and in most cases the inner limit of Federal fisheries jurisdiction and the outer limit of the jurisdiction of the states. The 24-nautical mile Contiguous Zone and the 200-nautical mile Exclusive Economic Zone were established by Presidential Proclamations. Unless fixed by treaty or the U.S. Supreme Court, these maritime limits are subject to modification.

THE NATION'S CHARTMAKER SINCE 1807

UNITED STATES
ALASKA - ALEUTIAN ISLANDS

# UNALASKA ISLAND

## UNALASKA BAY AND AKUTAN PASS

Mercator Projection
Scale 1:40,000 at Lat 53° 57'

North American Datum of 1983
(World Geodetic System 1984)

SOUNDINGS IN FATHOMS
AT MEAN LOWER LOW WATER

Additional information can be obtained at nauticalcharts.noaa.gov

COLREGS, 80-1705 (see note A)
International Regulations for Preventing Collisions at Sea, 1972.
The entire area of this chart falls seaward of the COLREGS Demarcation Line.

HEIGHTS
Heights in feet above Mean High Water.

NOTE D
CAUTION
Mariners are advised that low flying aircraft may be present over Hog Island Channel in the vicinity of Dutch Harbor Airport. The Federal Aviation Administration (FAA) has requested that vessels transit with caution and not anchor within the area.

CAUTION
Unexploded ordnance (artillery shells) have been discovered in the vicinity of the Chowiet Islands. Although no ordnance has been found hazardous and mariners are advised not to anchor in the area or use anchors to assist in mooring to the dock.

POLLUTION REPORTS
Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

18th Ed., Sep. 2012
16528

Published at Washington, D.C.
U.S. DEPARTMENT OF COMMERCE
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
NATIONAL OCEAN SERVICE
COAST SURVEY

This chart was distributed as a PDF (Portable Document Format). Printing PDFs may alter the chart scale, color, or legibility that may impact suitability for navigation. Printed charts provided by NOAA certified Print on Demand (POD) providers fulfill a vessel's requirement to carry a navigational chart "published by the National Ocean Service" in accordance with federal regulations, including but not limited to 33 C.F.R. 164.33(a), 33 C.F.R. 164.72(b), and 46 C.F.R. 28.225(a). POD charts meet stringent print standards and can be recognized by an official certification of authenticity printed on the chart. A list of POD providers can be found at: nauticalcharts.noaa.gov/pod

| FATHOMS | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| FEET | 0 | 3 | 6 | 9 | 12 | 15 | 18 | 21 | 24 | 27 | 30 | 33 | 36 | 39 | 42 | 45 | 48 | 51 | 54 |
| METERS | 0 | 0.5 | 1.0 | 1.5 | 2.0 | 2.5 | 3.0 | 3.5 | 4.0 | 4.5 | 5.0 | 5.5 | 6.0 | 6.5 | 7.0 | 7.5 | 8.0 | 8.5 | 9.0 |

Unalaska Bay and Akutan Pass
SOUNDINGS IN FATHOMS • SCALE 1:40,000