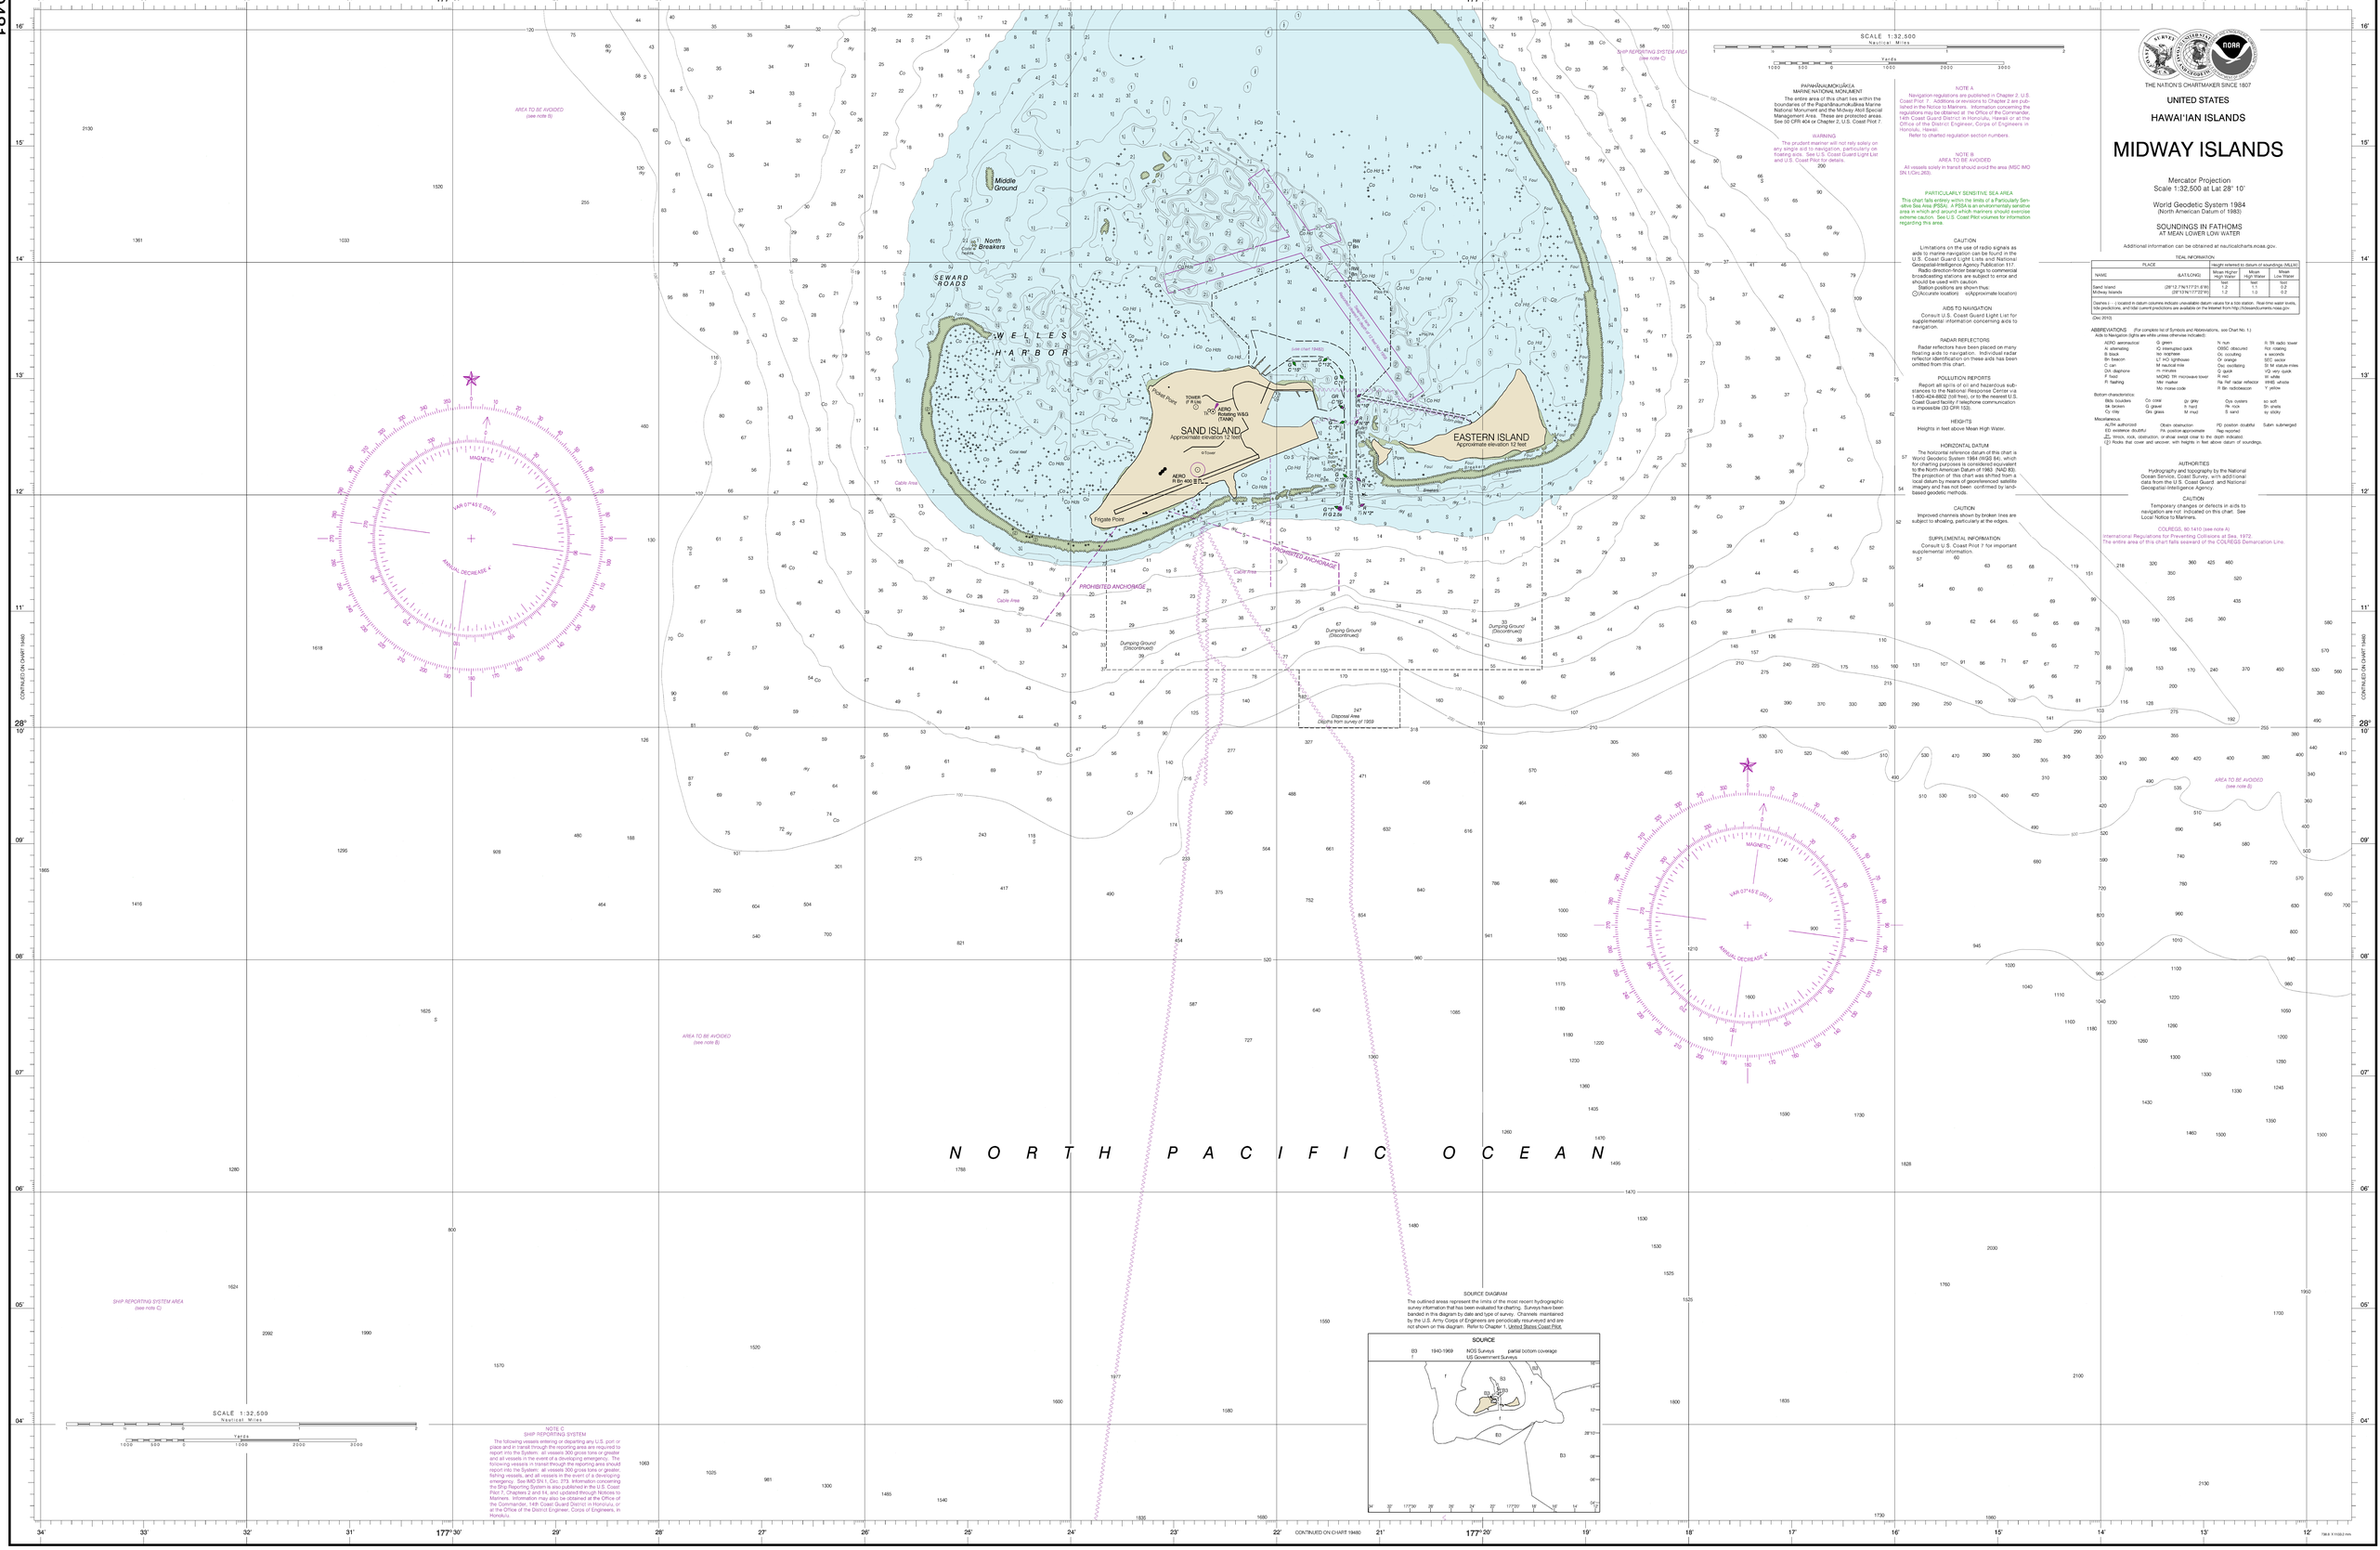


Formerly CS/C25 #198, 1st Ed., Oct. 1940 C-1943-0306 KWP 3926

PAPAHĀNAUMOKUĀKEA
MARINE NATIONAL MONUMENT

The entire area of this chart lies within the boundaries of the Papahānaumokuākea Marine National Monument and the Midway Atoll Special Management Area. These are protected areas. See 50 CFR 404 or Chapter 2, U.S. Coast Pilot 7.

WARNING

The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

NOTE A

Navigation regulations are published in Chapter 2, U.S. Coast Pilot 7. Additions or revisions to Chapter 2 are published in the Notice to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 14th Coast Guard District in Honolulu, Hawaii or at the Office of the District Engineer, Corps of Engineers in Honolulu, Hawaii.

Refer to charted regulation section numbers.

NOTE B

AREA TO BE AVOIDED

All vessels solely in transit should avoid the area (MSC IMO DN.1/Circ.263).

PARTICULARLY SENSITIVE SEA AREA

This chart falls entirely within the limits of a Particularly Sensitive Sea Area (PSSA). Extreme caution should be used in the area in which and around which mariners should exercise extreme caution. See U.S. Coast Pilot volumes for information regarding this area.

CAUTION

Limitations on the use of radio signals as aids to marine navigation can be found in the U.S. Coast Guard Light Lists and National Geospatial-Intelligence Agency Publication 117. Radio navigation signals from commercial broadcasting stations are subject to error and should be used with caution.

Station positions are shown thus:
(A)Accurate location) o(Approximate location)

AIDS TO NAVIGATION

Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

RADAR REFLECTORS

Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

POLLUTION REPORTS

Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

HEIGHTS

Heights in feet above Mean High Water.

HORIZONTAL DATUM

The horizontal reference datum of this chart is World Geodetic System 1984 (WGS 84), which for charting purposes is considered equivalent to the North American Datum of 1983 (NAD 83). The projection of this chart was shifted from a local datum by means of geodetic satellite imagery and has not been confirmed by land-based geodetic methods.

CAUTION

Improved channels shown by broken lines are subject to shoaling, particularly at the edges.

SUPPLEMENTAL INFORMATION

Consult U.S. Coast Pilot 7 for important supplemental information.

THE NATION'S CHARTMAKER SINCE 1807

UNITED STATES

HAWAI'IAN ISLANDS

# MIDWAY ISLANDS

Mercator Projection
Scale 1:32,500 at Lat 28° 10'

World Geodetic System 1984
(North American Datum of 1983)

SOUNDINGS IN FATHOMS
AT MEAN LOWER LOW WATER

Additional information can be obtained at nauticalcharts.noaa.gov.

TIDAL INFORMATION

| PLACE | | Height referred to Datum of sounding(ft. MLLW) | | | |
|---|---|---|---|---|---|
| NAME | (LATLONG) | Mean High Water | Mean High Water | Mean Low Water | Mean Low Water |
| Sand Island | (28°12.7'N/177°21.6'W) | feet 1.2 | feet 1.1 | feet 0.2 | feet 0.2 |
| Midway Islands | (28°13.5'N/177°22.9'W) | 1.2 | 1.0 | 0.2 | 0.2 |

Datums ( ) located in datum columns indicate unreliable datum values for a tide station. Real-time water levels, tide predictions, and tidal current predictions are available on the Internet from http://tidesandcurrents.noaa.gov.

(Dec 2013)

ABBREVIATIONS (For complete list of Symbols and Abbreviations, see Chart No. 1.)

Aids to Navigation (lights are white unless otherwise indicated)

| | | | |
|---|---|---|---|
| ACRO aeronautical | G green | Y Yum | R, RR radio tower |
| A alternating | IQ interrupted quick | DISC discount | Ror rotating |
| B black | Iso isophase | Oc occulting | s seconds |
| Bn beacon | LT HO lighthouse | Or orange | SEC sector |
| C can | M nautical mile | Osc oscillating | St M statute miles |
| Dia. diaphone | m minutes | Q quick | VQ very quick |
| F fixed | MONO 7th microwave tower | R red | W white |
| Fl flashing | Mkr marker | Ra Ref radar reflector | WHS whistle |
| | Mo. morse code | R Bc radiobeacon | Y yellow |

Bottom characteristics

| | | | | |
|---|---|---|---|---|
| Blds boulders | Co coral | gr gritty | Oys oysters | so soft |
| Bk broken | G gravel | h hard | Pk rock | St shells |
| Cy clay | Grs grass | M mud | S sand | sy sticky |

Miscellaneous

| | | | |
|---|---|---|---|
| ACRA authorized | | | |
| ED existence doubtful | Obstn obstruction | PD position doubtful | Subm submerged |
| PA position approximate | | Rep reported | |

⚠ Wreck, rock, obstruction, or shoal swept clear to the depth indicated.
(1) Rocks that cover and uncover, with heights in feet above datum of soundings.

AUTHORITIES

Hydrography and Topography by the National Ocean Service, Coast Survey, with additional data from the U.S. Coast Guard and National Geospatial-Intelligence Agency.

CAUTION

Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.

COLREGS, 80.1410 (see note A)

International Regulations for Preventing Collisions at Sea, 1972.
The entire area of this chart falls seaward of the COLREGS Demarcation Line.

SOURCE DIAGRAM

The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U.S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, United States Coast Pilot.

SOURCE

| | | |
|---|---|---|
| B3 | 1940-1969 | NOS Surveys partial bottom coverage |
| | | US Government Surveys |

NOTE C

SHIP REPORTING SYSTEM

The following vessels entering or departing any U.S. port or place and in transit through the reporting area are required to report into the System: all vessels 300 gross tons or greater and all vessels in the event of a developing emergency. The following vessels in transit through the reporting area should report into the System: all vessels 300 gross tons or greater, fishing vessels, and all vessels in the event of a developing emergency. See IMO SN.1, Circ.273. Information concerning the System may also be found in Chapter 2 and 14, U.S. Coast Pilot 7, Chapters 2 and 14, and updated through Notices to Mariners. Information may also be obtained at the Office of the Commander, 14th Coast Guard District in Honolulu, or at the Office of the District Engineer, Corps of Engineers, in Honolulu.

SCALE 1:32,500
Nautical Miles
Yards



CAUTION

This chart has been corrected from the Notice to Mariners (NM) published weekly by the United States Coast Guard and the Notice to Mariners (Msg) (Broadcast Mariners (I-NM)) issued periodically by each U.S. Coast Guard district to the dates shown in the lower left hand corner. Chart updates corrected from Notice to Mariners published after the dates shown in the lower left hand corner are available at nauticalcharts.noaa.gov.

12th Ed., Jan. 2011. Last Correction: 9/11/2014. Cleared through:
LNM: 4916 (12/6/2016), NM: 5116 (12/17/2016)

To ensure that this chart was printed at the proper scale, the bar below should measure six inches (152 millimeters).
If the line does not measure six inches (152 millimeters), this copy is not certified safe for navigation.

NOAA encourages users to submit inquiries, discrepancies or comments about this chart at http://www.nauticalcharts.noaa.gov/staff/contact.htm.

SOUNDINGS IN FATHOMS

Published at Washington, D.C.
U.S. DEPARTMENT OF COMMERCE
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
NATIONAL OCEAN SERVICE
COAST SURVEY

This chart was distributed as a PDF (Portable Document Format). Printing PDFs may alter the chart scale, color, or legibility that may impact suitability for navigation. Printed charts provided by NOAA certified Print on Demand (POD) providers fulfill a vessel's requirement to carry a navigational chart "published by the National Ocean Service" in accordance with federal regulations, including but not limited to 33 C.F.R. 164.33(a), 33 C.F.R. 164.72(b), and 46 C.F.R. 28.225(a). POD charts meet stringent print standards and can be recognized by an official certification of authenticity printed on the chart. A list of POD providers can be found at: nauticalcharts.noaa.gov/pod

| FATHOMS | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| FEET | 6 | 12 | 18 | 24 | 30 | 36 | 42 | 48 | 54 | 60 | 66 | 72 | 78 | 84 | 90 | 96 | 102 | 108 | 114 | 120 |
| METERS | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |

Midway Islands
SOUNDINGS IN FATHOMS - SCALE 1:32,500

19481