SOUNDINGS IN FEET

Formerly NOS 11329B, C & GS 590, 1st Combined Ed., Mar. 1952 C-1933-389

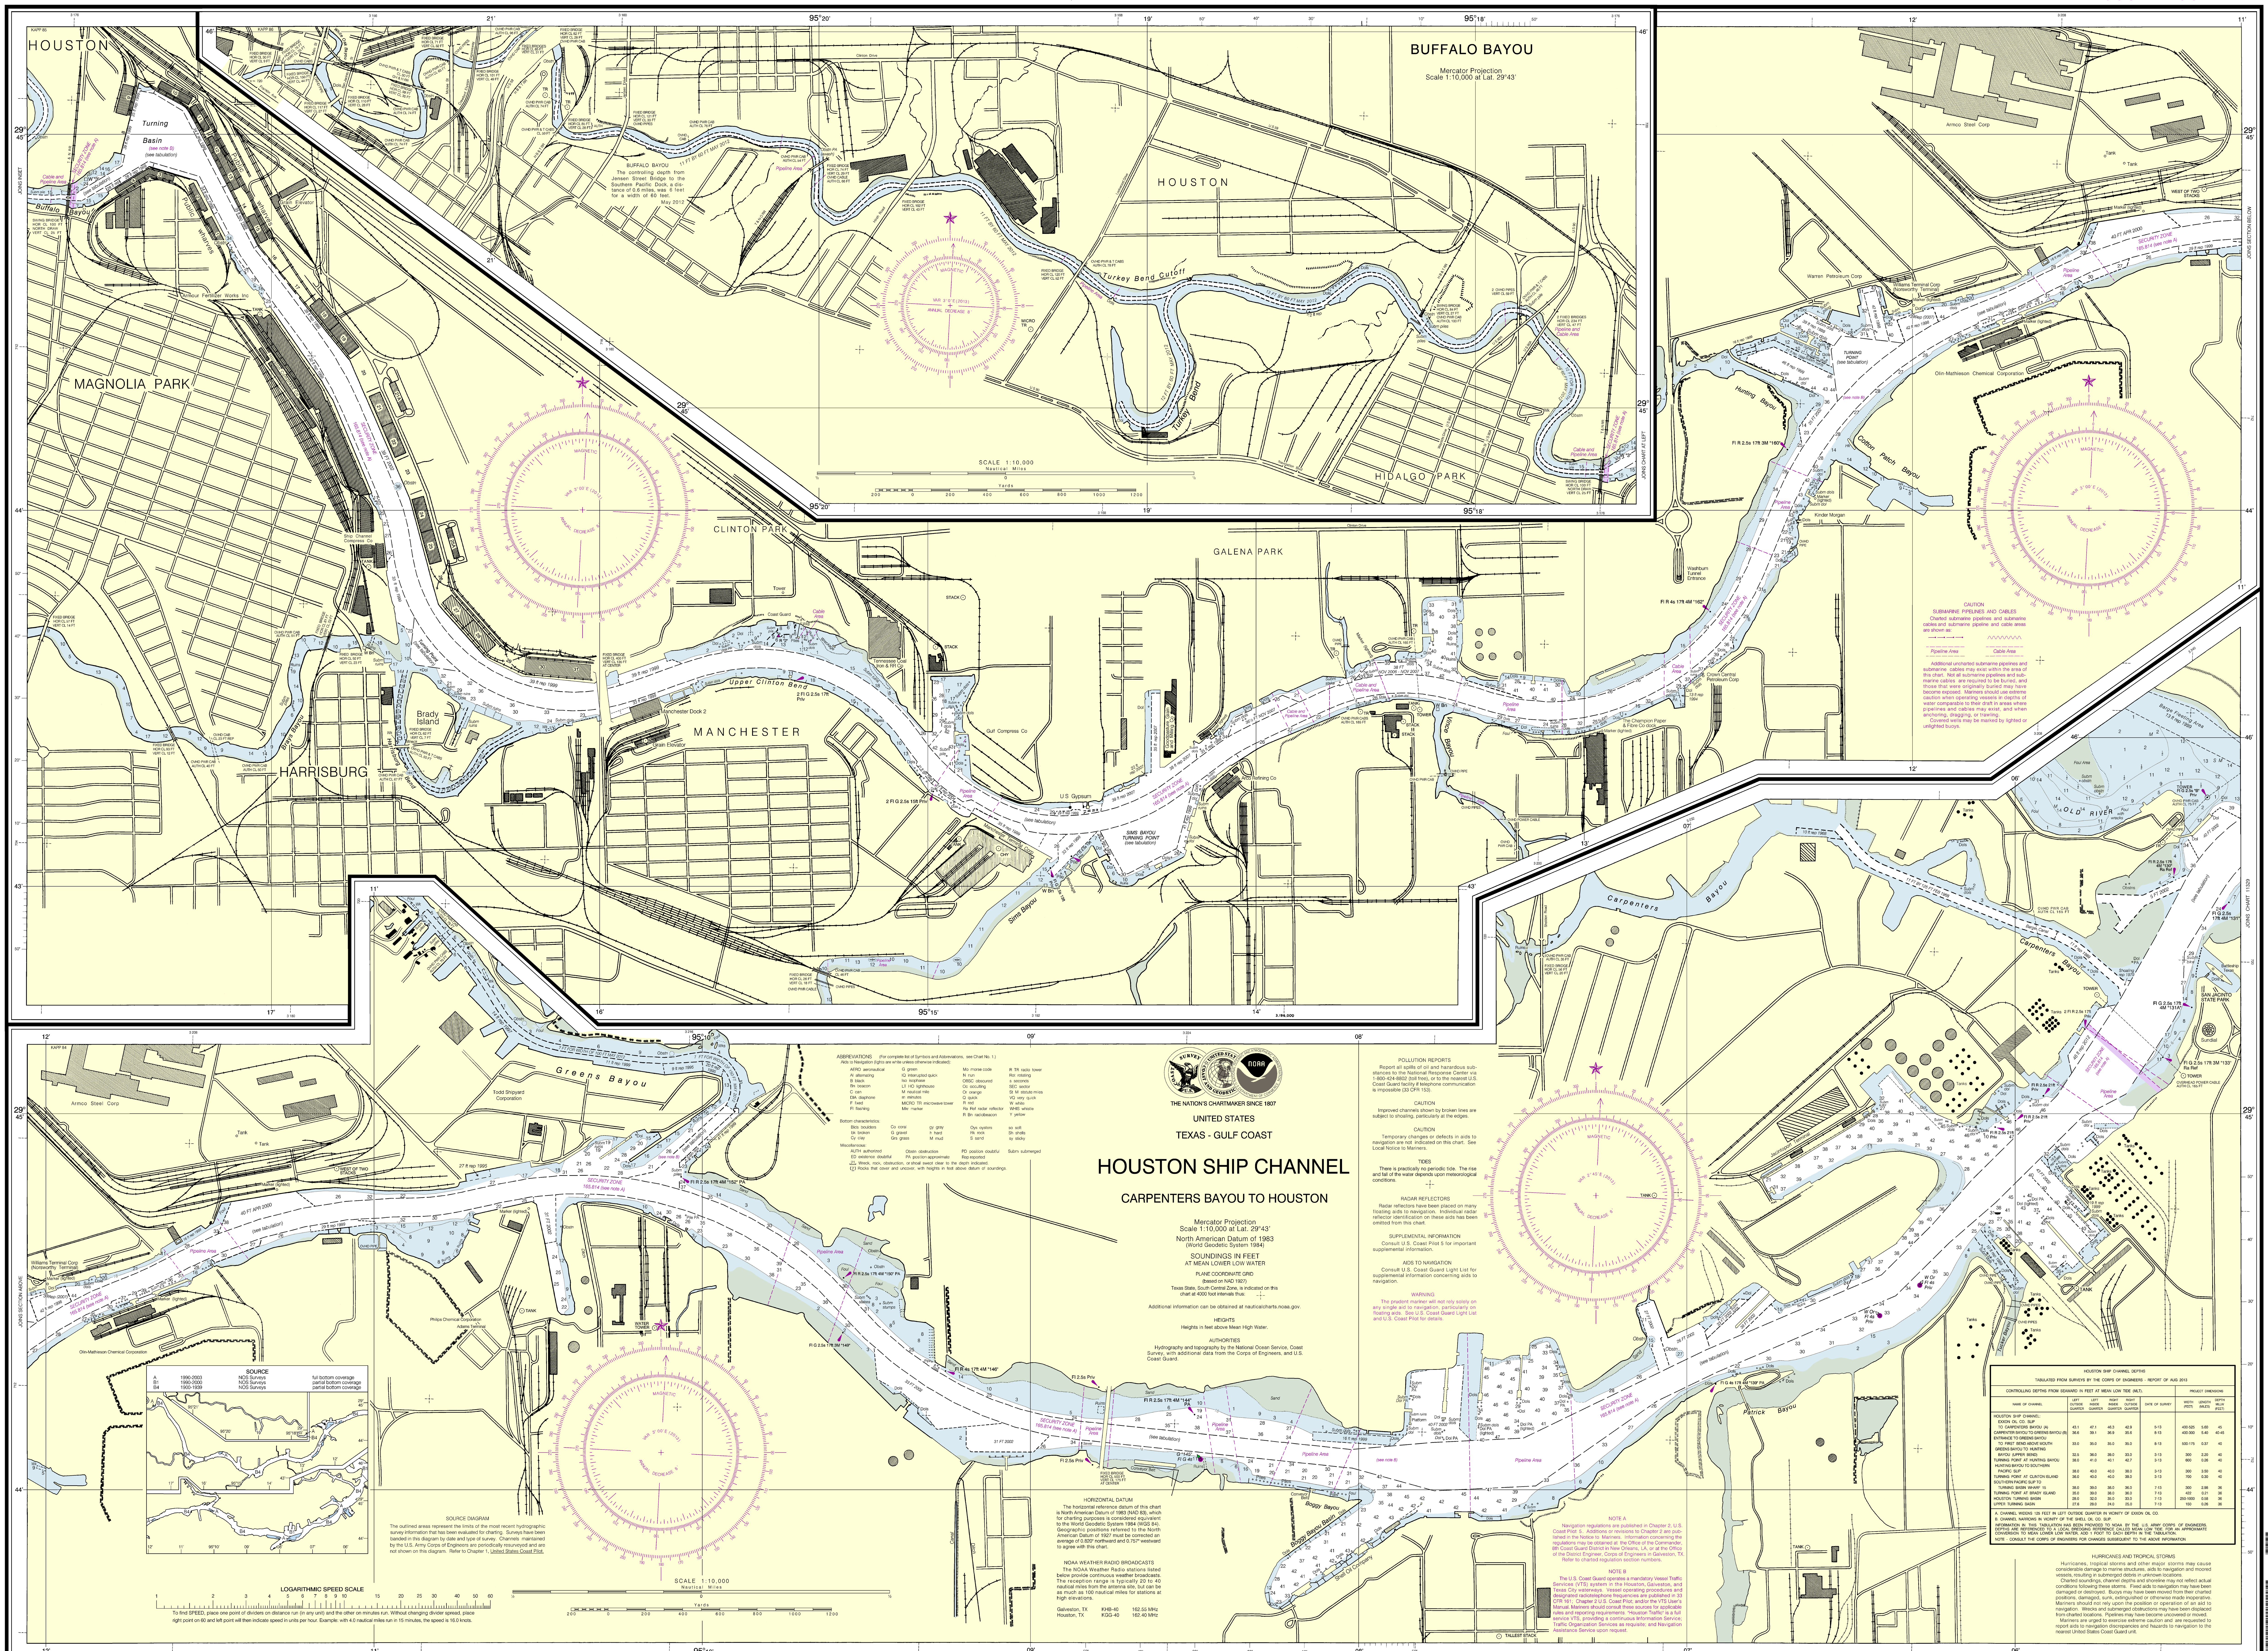

SOURCE

A	1990-2003	NOS Surveys	full bottom coverage
B1	1990-2000	NOS Surveys	partial bottom coverage
B4	1900-1939	NOS Surveys	partial bottom coverage

SOURCE DIAGRAM

The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U.S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, United States Coast Pilot.

LOGARITHMIC SPEED SCALE

To find SPEED, place one point of dividers on distance run (in any unit) and the other on minutes run. Without changing divider spread, place right point on 60 and left point will then indicate speed in units per hour. Example: with 4.0 nautical miles run in 15 minutes, the speed is 16.0 knots.

ABBREVIATIONS (For complete list of Symbols and Abbreviations, see Chart No. 1.)

Aids to Navigation (lights are white unless otherwise indicated):

AERO aeronautical, Al alternating, B black, Bn beacon, C can, DIA diaphone, F fixed, Fl flashing, G green, IQ interrupted quick, Iso isophase, LT HO lighthouse, M nautical mile, m minutes, MICRO TR microwave tower, Mkr marker, Mo morse code, N nun, OBSC obscured, Oc occulting, Or orange, Q quick, R red, Ra Ref radar reflector, R Bn radiobeacon, R TR radio tower, Rot rotating, s seconds, SEC sector, St M statute miles, VQ very quick, W white, WHIS whistle, Y yellow

Bottom characteristics: Blds boulders, bk broken, Cy clay, Co coral, G gravel, Grs grass, gy gray, h hard, M mud, Oys oysters, Rk rock, S sand, so soft, Sh shells, sy sticky

Miscellaneous: AUTH authorized, ED existence doubtful, Obstn obstruction, PA position approximate, PD position doubtful, Rep reported, Subm submerged

(21) Wreck, rock, obstruction, or shoal swept clear to the depth indicated.
(2) Rocks that cover and uncover, with heights in feet above datum of soundings.

THE NATION'S CHARTMAKER SINCE 1807

UNITED STATES

TEXAS - GULF COAST

HOUSTON SHIP CHANNEL

CARPENTERS BAYOU TO HOUSTON

Mercator Projection
Scale 1:10,000 at Lat. 29°43′

North American Datum of 1983
(World Geodetic System 1984)

SOUNDINGS IN FEET
AT MEAN LOWER LOW WATER

PLANE COORDINATE GRID
(based on NAD 1927)
Texas State, South Central Zone, is indicated on this chart at 4000 foot intervals thus:

Additional information can be obtained at nauticalcharts.noaa.gov.

HEIGHTS
Heights in feet above Mean High Water.

AUTHORITIES
Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, and U.S. Coast Guard.

POLLUTION REPORTS
Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

CAUTION
Improved channels shown by broken lines are subject to shoaling, particularly at the edges.

CAUTION
Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.

TIDES
There is practically no periodic tide. The rise and fall of the water depends upon meteorological conditions.

RADAR REFLECTORS
Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

SUPPLEMENTAL INFORMATION
Consult U.S. Coast Pilot 5 for important supplemental information.

AIDS TO NAVIGATION
Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

WARNING
The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

HORIZONTAL DATUM
The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83), which for charting purposes is considered equivalent to the World Geodetic System 1984 (WGS 84). Geographic positions referred to the North American Datum of 1927 must be corrected an average of 0.820″ northward and 0.757″ westward to agree with this chart.

NOAA WEATHER RADIO BROADCASTS
The NOAA Weather Radio stations listed below provide continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be as much as 100 nautical miles for stations at high elevations.

Galveston, TX	KHB-40	162.55 MHz
Houston, TX	KGG-40	162.40 MHz

NOTE A
Navigation regulations are published in Chapter 2, U.S. Coast Pilot 5. Additions or revisions to Chapter 2 are published in the Notice to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 8th Coast Guard District in New Orleans, LA, or at the Office of the District Engineer, Corps of Engineers in Galveston, TX. Refer to charted regulation sections numbers.

NOTE B
The U.S. Coast Guard operates a mandatory Vessel Traffic Services (VTS) system in the Houston, Galveston, and Texas City waterways. Vessel operating procedures and designated radiotelephone frequencies are published in 33 CFR 161; Chapter 2 U.S. Coast Pilot; and/or the VTS User's Manual. Mariners should consult these sources for applicable rules and reporting requirements. "Houston Traffic" is a full service VTS, providing a continuous Information Service; Traffic Organization Services as requisite; and Navigation Assistance Service upon request.

HOUSTON SHIP CHANNEL DEPTHS

TABULATED FROM SURVEYS BY THE CORPS OF ENGINEERS - REPORT OF AUG 2013

CONTROLLING DEPTHS FROM SEAWARD IN FEET AT MEAN LOW TIDE (MLT) / PROJECT DIMENSIONS

NAME OF CHANNEL	LEFT OUTSIDE QUARTER	LEFT INSIDE QUARTER	RIGHT INSIDE QUARTER	RIGHT OUTSIDE QUARTER	DATE OF SURVEY	WIDTH (FEET)	LENGTH (MILES)	DEPTH MLLW (FEET)
HOUSTON SHIP CHANNEL: EXXON OIL CO. SLIP TO CARPENTERS BAYOU (A)	43.1	47.1	46.3	42.9	5-13	400-525	5.60	45
CARPENTER BAYOU TO GREENS BAYOU (B)	36.6	39.1	36.9	35.6	8-13	400-300	5.40	40-45
ENTRANCE TO GREENS BAYOU TO FIRST BEND ABOVE MOUTH	33.0	35.0	35.0	35.0	8-13	500-175	0.37	40
GREENS BAYOU TO HUNTING BAYOU (UPPER BEND)	32.5	36.0	39.0	33.0	3-13	300	2.20	40
TURNING POINT AT HUNTING BAYOU	38.0	41.0	40.1	42.7	3-13	600	0.26	40
HUNTING BAYOU TO SOUTHERN PACIFIC SLIP	38.0	40.0	40.0	38.0	3-13	300	3.50	40
TURNING POINT AT CLINTON ISLAND	36.0	40.0	40.0	39.0	3-13	700	0.30	40
SOUTHERN PACIFIC SLIP TO TURNING BASIN WHARF 15	38.0	39.0	38.0	36.0	7-13	300	2.96	36
TURNING POINT AT BRADY ISLAND	35.0	39.0	38.0	36.0	7-13	422	0.21	36
HOUSTON TURNING BASIN	28.0	32.0	35.0	33.0	7-13	250-1000	0.58	36
UPPER TURNING BASIN	27.6	28.0	24.0	25.0	7-13	150	0.26	36

A. CHANNEL WIDENS 125 FEET IN LEFT OUTSIDE QUARTER IN VICINITY OF EXXON OIL CO.
B. CHANNEL NARROWS IN VICINITY OF THE SHELL OIL CO. SLIP.
INFORMATION IN THIS TABULATION HAS BEEN PROVIDED TO NOAA BY THE U.S. ARMY CORPS OF ENGINEERS. DEPTHS ARE REFERENCED TO A LOCAL DREDGING REFERENCE CALLED MEAN LOW TIDE. FOR AN APPROXIMATE CONVERSION TO MEAN LOWER LOW WATER, ADD 1 FOOT TO EACH DEPTH IN THE TABULATION.
NOTE - CONSULT THE CORPS OF ENGINEERS FOR CHANGES SUBSEQUENT TO THE ABOVE INFORMATION

HURRICANES AND TROPICAL STORMS
Hurricanes, tropical storms and other major storms may cause considerable damage to marine structures, aids to navigation and moored vessels, resulting in submerged debris in unknown locations.
Charted soundings, channel depths and shoreline may not reflect actual conditions following these storms. Fixed aids to navigation may have been damaged or destroyed. Buoys may have been moved from their charted positions, damaged, sunk, extinguished or otherwise made inoperative. Mariners should not rely upon the position or operation of an aid to navigation. Wrecks and submerged obstructions may have been displaced from charted locations. Pipelines may have become uncovered or moved.
Mariners are urged to exercise extreme caution and are requested to report aids to navigation discrepancies and hazards to navigation to the nearest United States Coast Guard unit.

40th Ed., Feb. /13 ■ Corrected through NM Feb. 02/13
Corrected through LNM Jan. 22/13

11325

CAUTION
This chart has been corrected from the Notice to Mariners (NM) published weekly by the National Geospatial-Intelligence Agency and the Local Notice to Mariners (LNM) issued periodically by each U.S. Coast Guard district to the dates shown in the lower left hand corner. Chart updates corrected from Notice to Mariners published after the dates shown in the lower left hand corner are available at nauticalcharts.noaa.gov.

This nautical chart has been designed to promote safe navigation. The National Ocean Service encourages users to submit corrections, additions, or comments for improving this chart to the Chief, Marine Chart Division (N/CS2), National Ocean Service, NOAA, Silver Spring, Maryland 20910-3282.

SOUNDINGS IN FEET

Published at Washington, D.C.
U.S. DEPARTMENT OF COMMERCE
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
NATIONAL OCEAN SERVICE
COAST SURVEY

Houston Ship Channel, Carpenters Bayou to Houston
SOUNDINGS IN FEET - SCALE 1:10,000

11325

NSN 7642014627114
NGA REFERENCE NO. 11AHA11325
ED. NO. 40

Last Correction: 11/13/2013. Cleared through:
LNM: 0714 (2/18/2014), NM: 0914 (3/1/2014)

To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters).
If the line does not measure six inches (152 millimeters), this copy is not certified safe for navigation.

This chart was distributed as a PDF (Portable Document Format). Printing PDFs may alter the chart scale, color, or legibility that may impact suitability for navigation. Printed charts provided by NOAA certified Print on Demand (POD) providers fulfill a vessel's requirement to carry a navigational chart "published by the National Ocean Service" in accordance with federal regulations, including but not limited to 33 C.F.R. 164.33(a), 33 C.F.R. 164.72(b), and 46 C.F.R. 28.225(a). POD charts meet stringent print standards and can be recognized by an official certification of authenticity printed on the chart. A list of POD providers can be found at: nauticalcharts.noaa.gov/pod