This nautical chart has been designed to promote safe navigation. The National Ocean Service encourages users to submit corrections, additions, or comments for improving this chart to the Chief, Marine Chart Division (N/CS2), National Ocean Service, NOAA, Silver Spring, Maryland 20910-3282.

Formerly C&GS 6122, 1st Ed., June 1891 KAPP 1787

PRINT-ON-DEMAND CHARTS

NOAA and its partner, OceanGrafix, offer this chart updated weekly by NOAA for Notices to Mariners and critical corrections. Charts are printed when ordered using Print-on-Demand technology. New Editions are available 2-8 weeks before their release as traditional NOAA charts. Ask your chart agent about Print-on-Demand charts or contact NOAA at http://ocsdata.ncd.noaa.gov/idrs/inquiry.aspx, or OceanGrafix at 1-877-56CHART or http://www.oceangrafix.com.

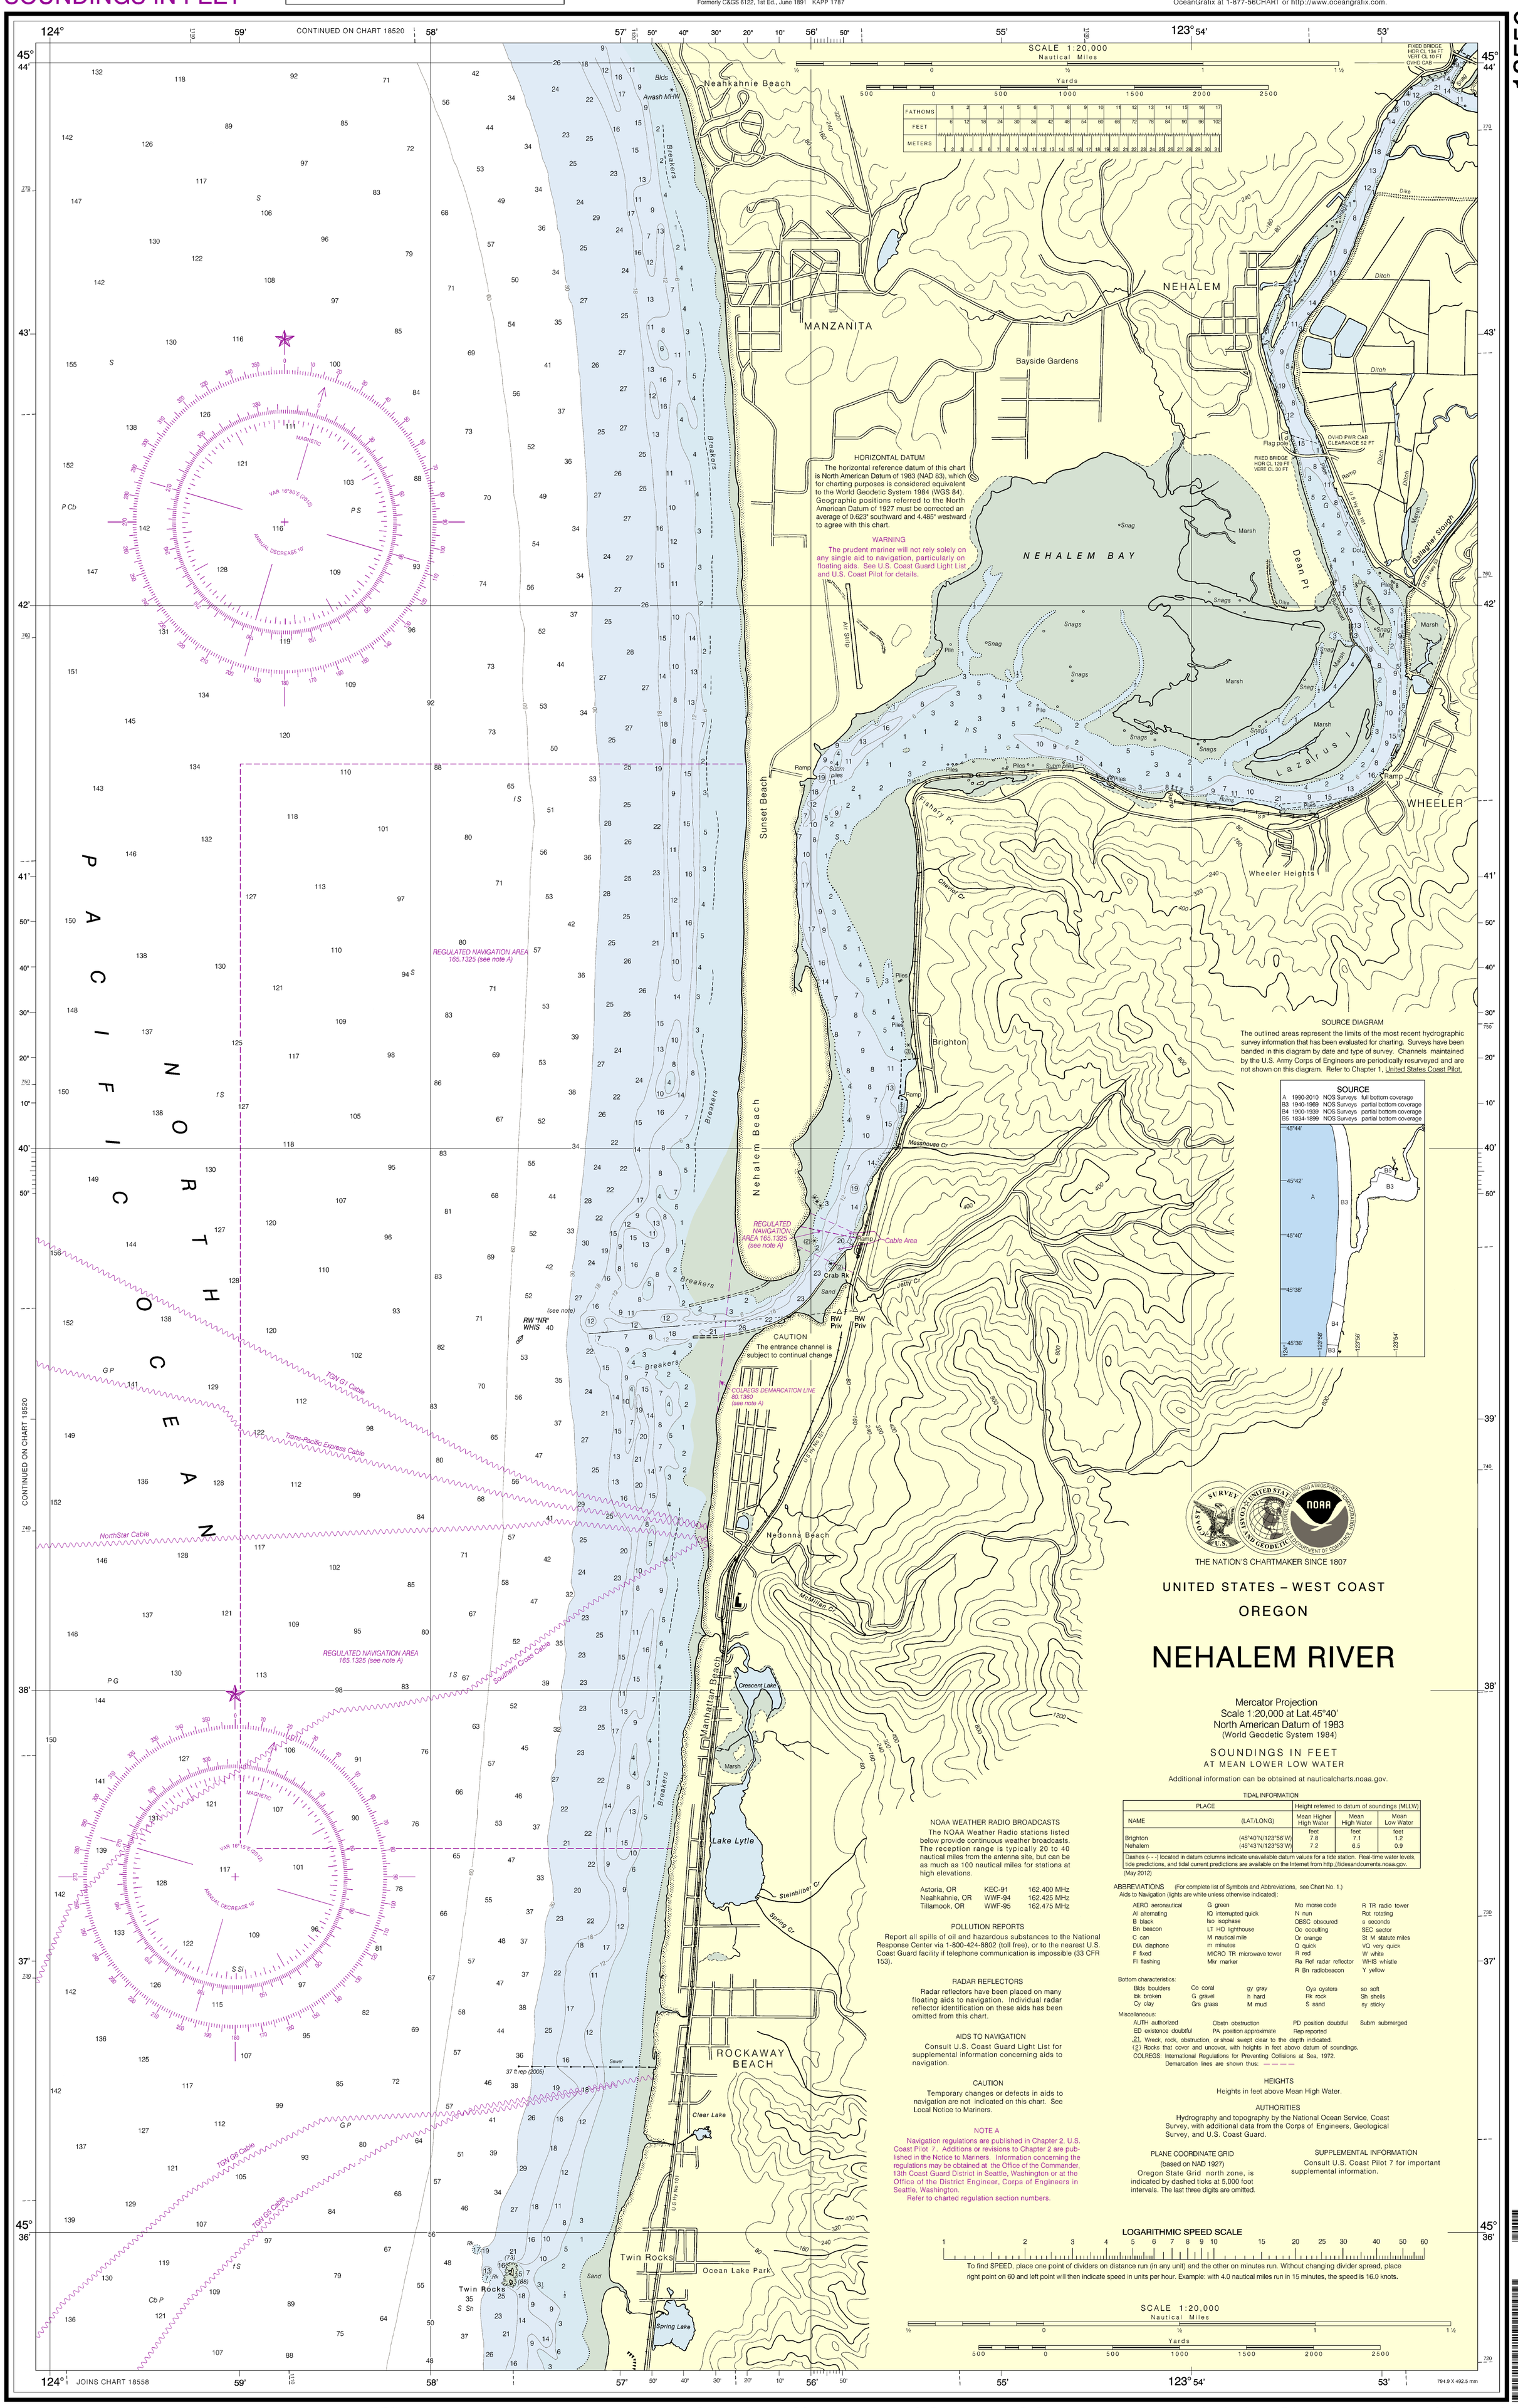

THE NATION'S CHARTMAKER SINCE 1807

UNITED STATES – WEST COAST

OREGON

NEHALEM RIVER

Mercator Projection
Scale 1:20,000 at Lat.45°40'
North American Datum of 1983
(World Geodetic System 1984)

SOUNDINGS IN FEET
AT MEAN LOWER LOW WATER

Additional information can be obtained at nauticalcharts.noaa.gov.

NOAA WEATHER RADIO BROADCASTS

The NOAA Weather Radio stations listed below provide continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be as much as 100 nautical miles for stations at high elevations.

Astoria, OR	KEC-91	162.400 MHz
Neahkahnie, OR	WWF-94	162.425 MHz
Tillamook, OR	WWF-95	162.475 MHz

POLLUTION REPORTS

Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

RADAR REFLECTORS

Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

AIDS TO NAVIGATION

Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

CAUTION

Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.

NOTE A

Navigation regulations are published in Chapter 2, U.S. Coast Pilot 7. Additions or revisions to Chapter 2 are published in the Notice to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 13th Coast Guard District in Seattle, Washington or at the Office of the District Engineer, Corps of Engineers in Seattle, Washington.

Refer to charted regulation section numbers.

TIDAL INFORMATION

PLACE NAME	(LAT/LONG)	Height referred to datum of soundings (MLLW): Mean Higher High Water	Mean High Water	Mean Low Water
		feet	feet	feet
Brighton	(45°40'N/123°56'W)	7.8	7.1	1.2
Nehalem	(45°43'N/123°53'W)	7.2	6.5	0.9

Dashes (- - -) located in datum columns indicate unavailable datum values for a tide station. Real-time water levels, tide predictions, and tidal current predictions are available on the Internet from http://tidesandcurrents.noaa.gov.

(May 2012)

ABBREVIATIONS (For complete list of Symbols and Abbreviations, see Chart No. 1.)

Aids to Navigation (lights are white unless otherwise indicated):

AERO aeronautical; Al alternating; B black; Bn beacon; C can; DIA diaphone; F fixed; Fl flashing; G green; IQ interrupted quick; Iso isophase; LT HO lighthouse; M nautical mile; m minutes; MICRO TR microwave tower; Mkr marker; Mo morse code; N nun; OBSC obscured; Oc occulting; Or orange; Q quick; R red; Ra Ref radar reflector; R Bn radiobeacon; R TR radio tower; Rot rotating; s seconds; SEC sector; St M statute miles; VQ very quick; W white; WHIS whistle; Y yellow

Bottom characteristics:

Blds boulders; bk broken; Cy clay; Co coral; G gravel; Grs grass; gy gray; h hard; M mud; Oys oysters; Rk rock; S sand; so soft; Sh shells; sy sticky

Miscellaneous:

AUTH authorized; ED existence doubtful; Obstn obstruction; PA position approximate; PD position doubtful; Rep reported; Subm submerged

(21) Wreck, rock, obstruction, or shoal swept clear to the depth indicated.
(2) Rocks that cover and uncover, with heights in feet above datum of soundings.
COLREGS: International Regulations for Preventing Collisions at Sea, 1972.
Demarcation lines are shown thus: — — — —

HEIGHTS

Heights in feet above Mean High Water.

AUTHORITIES

Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, Geological Survey, and U.S. Coast Guard.

PLANE COORDINATE GRID
(based on NAD 1927)

Oregon State Grid north zone, is indicated by dashed ticks at 5,000 foot intervals. The last three digits are omitted.

SUPPLEMENTAL INFORMATION

Consult U.S. Coast Pilot 7 for important supplemental information.

LOGARITHMIC SPEED SCALE

To find SPEED, place one point of dividers on distance run (in any unit) and the other on minutes run. Without changing divider spread, place right point on 60 and left point will then indicate speed in units per hour. Example: with 4.0 nautical miles run in 15 minutes, the speed is 16.0 knots.

SCALE 1:20,000
Nautical Miles
Yards

26th Ed., Jun. / 12 ■ Corrected through NM Jun. 30/12
Corrected through LNM Jun. 19/12

CAUTION

This chart has been corrected from the Notice to Mariners (NM) published weekly by the National Geospatial-Intelligence Agency and the Local Notice to Mariners (LNM) issued periodically by each U.S. Coast Guard district to the dates shown in the lower left hand corner. Chart updates corrected from Notice to Mariners published after the dates shown in the lower left hand corner are available at nauticalcharts.noaa.gov.

Published at Washington, D.C.
U.S. DEPARTMENT OF COMMERCE
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
NATIONAL OCEAN SERVICE
COAST SURVEY

NSN 7642014011630
NGA REFERENCE NO. 18XHA18556
ED. NO. 26

To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters). If the line does not measure six inches (152 millimeters), this copy is not certified safe for navigation.

Corrected through
LNM: 0314 (1/21/2014), NM: 0514 (2/1/2014), CHS: 1213 (12/27/2013)

To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters). If the line does not measure six inches (152 millimeters), this copy is not certified safe for navigation.